

PLAN SAFE WORK SAFE HOME SAFE

# 2026 Health & Safety Manual



Disclaimer: The master of this document is controlled electronically by the HSE Department of Priestly Demolition Inc. Printed copies of this document are not controlled. Document users are responsible for ensuring electronic and printed copies are valid prior to use.

**Committed to the continuous improvement  
of our health & safety performance and  
environmental management.**

## Table of Contents

<b>i. Overview</b>	<b>v</b>
a. Scope	v
<b>Section 1: HSE Management Program</b>	<b>1</b>
<b>1.1. HSE Program Overview</b>	<b>2</b>
<b>1.2. Plan</b>	<b>3</b>
1.2.1. Health and Safety Policy	3
1.2.2. Supporting Policies	5
1.2.3. Health & Safety Roles and Responsibilities	31
1.2.4. Health, Safety and Environmental Objectives	33
1.2.5. Legal and Authoritative Guidance	33
1.2.6. Health, Safety and Environmental Performance Indicators	34
1.2.7. Hazard Identification & Risk Assessment	34
1.2.8. Project Health, Safety and Environment Plans	35
<b>1.3. Do: Implementation and Operation</b>	<b>36</b>
1.3.1. Orientation	36
1.3.2. Training, Awareness and Competence	36
1.3.3. Daily Task Briefings	37
1.3.4. Hazard Identification	37
1.3.5. Weekly Site Safety Meetings	37
1.3.6. Participation and Consultation	37
1.3.7. Communication and Information	38
1.3.8. Joint Health and Safety Committees	39
1.3.9. Preventative Maintenance	39
1.3.10. Contractor Selection	39
1.3.11. Emergency Response	39
1.3.12. Managing Changes	40
<b>1.4. Check</b>	<b>41</b>
1.4.1. Training Effectiveness	41
1.4.2. Internal Inspections	41
1.4.3. External Inspections	41
1.4.4. Internal Audits	41
1.4.5. External Audits	42
1.4.6. Types of Monitoring	42
1.4.7. Proactive Performance Monitoring	42
1.4.8. Reactive Performance Monitoring	43
1.4.9. Non-conformance and Observations	43
1.4.10. Accidents and Incidents	43
1.4.11. Statistics	44
1.4.12. Control of Documents and Data	44
1.4.13. Archiving Documents	45

## 1.5. Act

- 1.5.1. Corrective Actions
- 1.5.2. Disciplinary Actions
- 1.5.3. Program Review and Continuous Improvement

46  
46  
46  
46

## Section 2: Corporate Standards

- PDI HSE - S001 Safety Documents and Record Control
- PDI HSE - S002 Hazard Assessment, Analysis and Control
- PDI HSE - S003 Joint Health and Safety Committee
- PDI HSE - S004 Procurement and Contractor Management
- PDI HSE - S005 Company Rules
- PDI HSE - S006 Personal Protective Equipment
- PDI HSE - S007 Preventative Maintenance
- PDI HSE - S008 Training
- PDI HSE - S009 Workplace Inspection
- PDI HSE - S010 Investigation and Reporting
- PDI HSE - S011 Emergency Preparedness
- PDI HSE - S012 Stats and Records
- PDI HSE - S013 Legislation and Other Requirements
- PDI HSE - S014 Management Review
- PDI HSE - S015 Management of Change
- PDI HSE - S016 Communication
- PDI HSE - S017 Return to Work and Re-Employment
- PDI HSE - S018 WHMIS
- PDI HSE - S019 Fatigue Management
- PDI HSE - S020 Right to Refuse Unsafe Work

## Section 3: Safe Work Practices and Procedures

### 3.1. Activities

- SWP-A01, Company Rules
- SWP-A02, Hot Work
- SWP-A03, Truck Loading & Unloading
- SWP-A04, Fueling Equipment – Diesel and Gasoline
- SWP-A05, Confined Space Procedure
- SWP-A06, Air Gap
- SWP-A07, Working Alone
- SWP-A08, Concrete Cutting
- SWP-A09, Lock-Out/Tag-Out
- SWP-A10, Wildlife
- SWP-A11, Housekeeping
- SWP-A12, Site Traffic Control
- SWP-A13, Barricades and Guardrails
- SWP-A14, Trenching and Excavations

SWP-A15, Working at Heights  
SWP-A16, Limits of Approach  
SWP-A17, Office Environment  
SWP-A18, Manual Lifting  
SWP-A19, Fire Protection and Prevention  
SWP-A20, Office Ergonomics  
SWP-A21, Slip, Trip & Fall Prevention  
SWP-A22, Lightning Safety  
SWP-A23, Risk of Violence  
SWP A24, Working at Night  
SWP-A25, Pressurised water  
SWP-A26, Emergency Response  
SWP-A27, Forest Fire Prevention  
SWP-A28, Structural Demolition  
SWP-A29, Short Service Worker (SSW)  
SWP-A30, Torching and Cutting  
SWP-A31, Driving (Procedure)  
SWP-A32, Response to Regulatory Inspections & Orders  
SWP-A33, Interior Demolition - Machinery  
SWP-A34, Dropped Objects  
SWP-A35, Tarping Bins

### **3.2. Equipment**

SWP-E01, Manual Hand Tools  
SWP-E02, Powered Hand Tools  
SWP-E03, Defective Tools  
SWP-E04, Crushing and Screening  
SWP-E05, Forklift Operation  
SWP-E06, Warehouse  
SWP-E07, Processing and Sorting Demolition Materials  
SWP-E08, Vehicle Use  
SWP-E09, Elevating Work Platforms  
SWP-E10, Chainsaw Use  
SWP-E11, Compressed Gas Cylinders  
SWP-E12, Ladders  
SWP-E13, Scaffolding  
SWP-E14, Electrical Safety (General)  
SWP-E15, Hoisting and Rigging  
SWP-E16, Safe Use of Table Saws  
SWP-E17, Heavy Equipment Operation  
SWP-E18, Equipment Assembly & Disassembly  
SWP-E19, Powered Mobile Equipment  
SWP-E20, Shredder Operation (Procedure)  
SWP-E21, Machine Guarding – For Rotating and Moving Equipment  
SWP-E22, Cranes, Hoists, and Lift Trucks  
SWP-E23, MSA Altair 4x Bump Test and Calibration (Procedure)

SWP-E24, MSA Altair 2x Bump Test and Calibration (Procedure)

SWP-E25, Knife Safety

### 3.3. Occupational Health

SWP-O01, WHMIS

SWP-O02, Cold Stress

SWP-O03, Hot Stress

SWP-O04, Noise Exposure

SWP-O05, Bugs and Insects

SWP-O06, Vibration

SWP-O07, Propane

SWP-O08, Dust (General)

SWP-O09, Chemical Spill

SWP-O10, Asbestos – Operations

- SWP-O10, Asbestos – Asbestos
- SWP-O10.1, Asbestos – Type 1
- SWP-O10.2, Asbestos – Type 2
- SWP-O10.3, Asbestos – Type 3

SWP-O11, Chemical & Hazardous Materials – Handling and Storage

SWP-O12, Carbon Monoxide (CO)

SWP-O13, Sharps

SWP-O14, Animal Droppings – Birds & Bats

SWP-O15, Ultra-Violet Radiation

SWP-O16, Lead

SWP-O17, Silica

SWP-O18, Mould

SWP-O19, Chemical and Biological Hazards – General

SWP-O20, COVID-19 Prevention

SWP-O21, PCB Removal

### Section 4: Supporting Forms and Documents



## i. Overview

Managing health, safety and the environment is our ethical and legal responsibility. It also adds value to our business by helping us to improve our project and business planning including control measures and our overall performance. Effective health, safety and environmental management is therefore a key requirement of our business.

A reasonable degree of documentation is required to meet legal requirements and to help us with our planning and controls. The templates, forms and checklists within this Health, Safety and Environmental (HSE) Management System are tools to help manage these requirements. When correctly completed and used, these tools assist in demonstrating our safety management processes in the event of an audit, review, accident or incident, case of work-related illness, or when internal and external investigations may occur.

The HSE management system takes into account our own requirements as outlined above and the requirements of:

- The Ontario Provincial Certificate of Recognition (COR) program
- Applicable Laws
- Industry Best Practices and Procedures

### a. Scope

The people involved in our business are our greatest asset. We will manage all our work activities to ensure that hazards are identified and managed to minimize risks to health, safety and the environment. It is our corporate responsibility, as well as the responsibility of every individual working for, or on behalf of, our company.

The company also minimizes risk to the health and safety of anyone onsite who are not directly involved in our business undertakings, but may be directly impacted by our work; for example, visitors, adjacent businesses or the public.

To enable a systematic approach to these responsibilities, this Health, Safety and Environment (HSE) Management System has been developed and is contained in the contents of this manual. The emphasis of this HSE Management System is to manage risk by providing clear and concise policies, organizational roles and responsibilities, standards, and work practices and procedures to be used in our business for all workplaces.

The HSE management system contains 4 sections, which together form a comprehensive system that supports and provides organization, direction and tools for the implementation and execution of the program.

# 2026 Health and Safety Manual

## Health, Safety & Environmental



Section 1	Health & safety management program
Section 2	Corporate standards
Section 3	Safe work practices and procedures
Section 4	Forms and supporting documents

Disclaimer: The master of this document is controlled electronically. Printed copies of this document are not controlled. Document users are responsible for ensuring copies are valid prior to use.



# Section 1: HSE Management Program

Disclaimer: The master of this document is controlled electronically. Printed copies of this document are not controlled. Document users are responsible for ensuring copies are valid prior to use.

## 1.1. HSE Program Overview

The HSE management program is based on the Plan - Do - Check - Act model, as depicted in *CSA Z1000-06 Occupational Health and Safety Management*. It was designed to be compatible with other management system standards currently in use by organizations across Canada, such as ISO 14001 (environmental management) and ISO 9001 (quality management).



Figure 1. CSA Z1000 Continuous Improvement Model



## 1.2. Plan

### 1.2.1. Health and Safety Policy

The Health and Safety Policy provides the overall commitment of the company to the effective management of health and safety. It forms the basis of all our work planning and actions while at work.

The contents of the Health and Safety Policy are communicated to our employees during the new employee orientation. Subcontractors are provided with a copy of the policy within contractual documents.

The Health and Safety policy is posted on prominent notice boards in all workplaces and when applicable, at field operations, as well as being available via our intranet and portable electronic devices

**PDI**<sup>®</sup>  
**Group of Companies**

**Policy:** Health and Safety Policy Statement  
**Department:** Health, Safety and Environment  
**Policy No.** PDI HSE - P001  
**Relevant Standard No.** N/A

The senior management and management of Priestly Demolition Inc. (PDI) are committed to provide a safe and healthy work environment for the prevention of injuries and illness for all employees. The company will ensure that our activities are in compliance with applicable safety legal and other requirements and will take every reasonable precaution to protect all employees at all times. No project or company objectives take priority over the safe planning and safe execution of work.

Workers have the right to work in a safe and healthy work environment. PDI has the ultimate goal of zero harm and is committed to work in a spirit of consultation and cooperation with workers in our efforts to achieve this goal. A proactive approach shall be used to control and minimize the risk of occupational injury and illness in our workplace.

The responsibilities for all workplace parties are clearly defined through our safety program.

Senior management will set and review safety objectives for the company, with a focus on the continuous improvement of the company safety systems and performance.

Management is responsible for the design, implementation, monitoring, and communication of health and safety programs, policies, and procedures.

Supervisors will take all precautions necessary to protect the health and safety of every worker under their supervision and ensure that the workers they supervise follow procedures and measures required by occupational health and safety legislation.

Suppliers and contractors must have policies that align with our safety policy and program. Sub-contractors and visitors on-site will be informed of our safety program, policies, and procedures.

All employees are responsible for cooperating with management in the implementation of the HSE program, and participating in inspections, investigations, maintenance, and any other efforts that support the continuous improvement of our safety culture.

Appropriate action will be taken against any employee who engages in an unsafe act, or who fails to comply with established safe work practices and procedures.

This policy will be reviewed annually by management at PDI.



---

**Shane Stewart**

President & CEO



### 1.2.2. Supporting Policies

The supporting policies provide overall guidance on specific aspects of the HSE management system.

- PDI HSE - P002 Hazard Assessment, Analysis and Control Policy
  - PDI HSE - P003 Controls Policy
  - PDI HSE - P004 Procurement and Contractor Management Policy
  - PDI HSE - P005 Company Rules Policy
  - PDI HSE - P006 PPE Policy
  - PDI HSE - P007 Preventative Maintenance Policy
  - PDI HSE - P008 Training Policy
  - PDI HSE - P009 Workplace Inspections Policy
  - PDI HSE - P010 Investigations and Reporting Policy
  - PDI HSE - P011 Emergency Preparedness Policy
  - PDI HSE - P012 Statistics and Records Policy
  - PDI HSE - P013 Legislation and Other Requirement Policy
  - PDI HSE - P014 Management Review Policy
  - PDI HSE - P015 Management of Change Policy
  - PDI HSE - P016 Communication Policy
  - PDI-HSE - P017 Return To Work
  - PDI- HSE - P018 Environment Policy
- 
- PDI HR - 013      Violence & Harassment Policy
  - PDI HR - 010      Possession And Impairment Policy

**PDI**<sup>®</sup>  
**Group of Companies**

**Policy:** Hazard Assessment, Analysis and Control

**Department:** Health, Safety and Environment

**Policy No.** PDI HSE - P002

**Relevant Standard No.** PDI HSE - S002

As part of our Occupational Health & Safety Management System, Priestly Demolition Inc. is committed to conducting on-going hazard assessment, analysis and control to minimize the risks to health and safety within our workplaces.

The company is supportive of every Worker's Right to Know about that hazards that exist in their workplaces. Therefore, the company has developed this Policy and a corresponding standard to assist management in taking a proactive approach to identifying hazards, determine risk and the required controls associated with our operations.

We will identify the hazards that exist in the workplace, prioritize the risks associated with each specified task before and after controls are implemented and evaluate the effectiveness of those controls through observation and recommendation.



---

**Shane Stewart**

President & CEO

**PDI**<sup>®</sup>  
**Group of Companies**

**Policy:** Control

**Department:** Health, Safety and Environment

**Policy No.** PDI HSE - P003

**Relevant Standard No.** PDI HSE - S002

The organization and its management are committed to ensuring that all known and identified safety and health hazards are effectively controlled.

The company will use the hierarchy of controls when selecting controls and ensure that the appropriate controls are put in place.



---

**Shane Stewart**

President & CEO

# **PDI**<sup>®</sup>

## **Group of Companies**

**Policy:** Procurement and Contractor Management

**Department:** Health, Safety and Environment

**Policy No.** PDI HSE – P004

**Relevant Standard No.** PDI HSE - S004

The senior management of Priestly Demolition Inc. are committed to ensure that while performing work with PDI, contractors, subcontractors and their employees perform work in a manner that protects the health and safety of all and aligns with PDI'S values. It is PDI'S objective under this policy to:

- Select, hire and work with competent contractors who conform to the Occupational Health and Safety Act of Ontario and align with PDI'S Health and Safety Policies and Practices.
- Monitor contractors to ensure work is performed safely and efficiently
- Evaluate contractors on a regular basis

Contractors working for PDI on PDI projects are required to undergo a prequalification process to ensure compliance with the Procurement and Contractor Management Policy objectives. Ongoing feedback will be solicited from PDI employees to evaluate contractors.



---

**Shane Stewart**

President & CEO

**PDI**  
**Group of Companies**

**Policy:** Company Rules  
**Department:** Health, Safety and Environment  
**Policy No.** PDI HSE – P005  
**Relevant Standard No.** PDI HSE – S005

Priestly Group of Companies, also referred to as “PDI” in this document, is committed to ensuring continuous education of the organization’s company rules to its’ employees.

Management is responsible to participate in setting and implementing all company rules, including the review of this policy statement and all company rules, located in PDI’s Employee Handbook, on an annual basis to ensure accuracy and alignment with company’s vision and objectives.

In addition, Management is responsible to comply with all company rules. To showcase their commitment to this, Management strives to ensure they are continuously focused on the demonstration of PDI’s company rules to the rest of our employees. This includes leading by example and spreading awareness, so employees are in clear alignment with the company’s expectations on PDI’s company rules.

All employees are responsible for cooperating with management in the implementation of PDI’s company rules, and actively participating in any efforts that support the continuous improvement of our culture. Appropriate action will be taken against any employee who fails to comply with the established company rules and procedures, as outlined in the PDI Employee Handbook and policy documents, as per our progressive discipline procedure.

This policy statement and PDI’s Employee Handbook will be reviewed annually by the Management Team and People Success department.



---

**Shane Stewart**  
President & CEO

**PDI**<sup>®</sup>  
**Group of Companies**

**Policy:** Personal Protective Equipment

**Department:** Health, Safety and Environment

**Policy No.** PDI HSE – P006

**Relevant Standard No.** PDI HSE – S006

It is Priestly Demolition Inc.'s policy to effectively manage the hazards on our projects. Hazards shall be minimized by ensuring that all jobs are well planned, workers are properly trained, and safe work practices and safe job procedures are followed.

All personnel are mandated to wear the appropriate PPE required by regulation at all times. This regularly includes head protection, foot protection, eye protection, hearing protection. Specialty PPE such as fall arrest protection, shall be used by properly trained personnel, where required. All PPE must meet or exceed the applicable current CSA standard(s) or legislated standard.



---

**Shane Stewart**

President & CEO

**PDI**<sup>®</sup>  
**Group of Companies**

**Policy:** Preventative Maintenance  
**Department:** Fleet Operations  
**Policy No.** PDI HSE – P007  
**Relevant Standard No.** PDI HSE – S007

The senior management and management of Priestly Demolition Inc. (PDI) are committed to keeping the equipment, tools, vehicles, and facilities used by our employees in safe working order by following the Preventative Maintenance Procedure.

The set expectations are as follows.

Senior management will set and review preventative maintenance standards and objectives to continuously improve the procedure.

Management is responsible for the design, implementation, monitoring, and communication of Preventative Maintenance programs, policies, and procedures.

All employees are responsible for cooperating with management in the implementation of the Preventative Maintenance Procedure and participating in inspections, investigations, maintenance, and any other efforts that support the continuous improvement of the procedure.

This policy will be reviewed annually by the management at PDI.



---

**Shane Stewart**

President & CEO

**PDI**<sup>®</sup>  
**Group of Companies**

**Policy:** Safety Training

**Department:** Health, Safety and Environment

**Policy No.** PDI HSE - P008

**Relevant Standard No.** PDI HSE – S008

Priestly Demolition will provide all health and safety-related training that is prescribed and necessary to minimize harm to personnel and the physical resources of the company. All employees will participate in this training.

The purpose of this policy is to provide for consistent general and specialized health and safety-related training throughout all levels of the organization.

This training will include, but not be limited to:

- Safety orientation
- New hire safety orientations
- Safety training for workers, supervisors, and management
- Task and trade-specific training and certification
- Workplace Hazardous Materials Information System (WHMIS) training, annual update, and site-specific orientation
- Safe work practices and job procedures, as applicable
- The proper fitting, safe use, cleaning, and maintenance of respiratory protective equipment, as applicable.

In addition, safety meetings involving field workers will be held on a weekly basis or as determined by site requirements.

NOTE: The safety information in this policy does not take precedence over occupational health and safety legislation. All employees should be familiar with the applicable Occupational Health and Safety requirements for their jurisdiction.



---

**Shane Stewart**

President & CEO

**PDI**<sup>®</sup>  
**Group of Companies**

**Policy:** Workplace Inspection

**Department:** Health, Safety and Environment

**Policy No.** PDI HSE – P009

**Relevant Standard No.** PDI HSE – S009

Workplace inspections help prevent incidents, injuries and illnesses. Through a critical examination of the workplace, inspections help to identify and record hazards for corrective action. Company facilities and job-sites shall be included in the inspection program.

Regular workplace inspections are an important part of the company's overall occupational health and safety program and management system.



---

**Shane Stewart**

President & CEO

**PDI**<sup>®</sup>  
**Group of Companies**

**Policy:** Investigation and Reporting  
**Department:** Health, Safety and Environment  
**Policy No.** PDI HSE – P010  
**Relevant Standard No.** PDI HSE – S010

Priestly Demolition Inc. requires all personnel (including employees, subcontractors and visitors) to report all accidents, injuries, exposures, and near misses as soon as possible after an occurrence. Incidents will be investigated in accordance with all applicable legislated requirements, and the results will form part of the continuous improvement process for the safety program.

Senior management is committed to the adherence of the procedures contained in the Incident Reporting and Investigation standard, and compliance is mandatory. This policy and the supporting standard are consistent with the Company's values of Safety, Integrity, and Innovation.



---

**Shane Stewart**  
President & CEO

**PDI**<sup>®</sup>  
**Group of Companies**

**Policy:** Emergency Preparedness

**Department:** Health, Safety and Environment

**Policy No.** PDI HSE – P011

**Relevant Standard No.** PDI HSE – S011

Notwithstanding the Company's commitment to provide and sustain a safe and healthy work environment for all, we recognize that emergencies can arise. Priestly Demolition Inc. considers emergency preparedness to be of critical importance. Effective emergency preparedness ensures that the company and our people, are able to rapidly respond to and efficiently recover from an emergency.

Should an emergency, either manmade or natural, occur, the work environment can be threatened or damaged. The company has an obligation to ensure that the threat or damage engendered by the emergency is minimized through effective and deliberate emergency management. The overall goal is to ensure the safety of staff, and visitors.



---

**Shane Stewart**

President & CEO

**PDI**<sup>®</sup>  
**Group of Companies**

**Policy:** Statistics and Records

**Department:** Health, Safety and Environment

**Policy No.** PDI HSE – P012

**Relevant Standard No.** PDI HSE – S012

Maintaining current health and safety statistics and records is an integral part of an effective health and safety program. The company has established a system to record and review statistics in order to recognize hazard trends and monitor the success of our health and safety program.

Records, reports and other safety performance measures will be reviewed, as part of our continuous improvement process, to establish areas of the safety program that need improvement. This review is an essential element for preventing future accidents and injuries.

Senior management is committed to this policy and the performance of annual reviews of safety documentation including incident reports, accident investigation reports, lost-time injuries, and minutes of the company's Joint Health & Safety committee.



---

**Shane Stewart**

President & CEO

**PDI**<sup>®</sup>  
**Group of Companies**

**Policy:** Legislation and Other Requirements  
**Department:** Health, Safety and Environment  
**Policy No.** PDI HSE – P013  
**Relevant Standard No.** PDI HSE – S013

The Company is committed to complying with all applicable safety legislation, regulations, standards and any other applicable safety requirements for the areas in which we perform work.

The Company will identify and periodically review the applicable legislation and requirements, and apply enforcement as necessary, to ensure that we maintain compliance.

We believe that all workers should have access to these requirements and information available, as appropriate, on all our worksites.



---

**Shane Stewart**  
President & CEO

**PDI**<sup>®</sup>  
**Group of Companies**

**Policy:** Management Review

**Department:** Health, Safety and Environment

**Policy No.** PDI HSE – P014

**Relevant Standard No.** PDI HSE – S014

Priestly Demolition Inc. is committed to the principles of continuous improvement in all aspects of our business operations. As part of this ongoing commitment the senior management team will review monthly safety statistics, annual objectives attainment, identify trends, and conduct an annual review of the Health, Safety, and Environmental program to ensure the suitability, adequacy, and effectiveness of the program. The results of this review will form part of the basis for the objectives, goals, and actions plans for the following year.



---

**Shane Stewart**

President & CEO

**PDI**<sup>®</sup>  
**Group of Companies**

**Policy:** Management of Change

**Department:** Health, Safety and Environment

**Policy No.** PDI HSE – P015

**Relevant Standard No.** PDI HSE – S015

Organizational changes are implemented occasionally for reasons such as Safety improvements, production efficiency and streamlining of processes. Changes, however, can pose risks to employees if they are implemented without conducting formal reviews of and management of change.

Management is committed to ensuring a disciplined, structured, and consistent approach to managing change by identifying, treating, and controlling potential risks. Overall requirements to assess, plan, approve, communicate, implement, and close-out a change are defined in the supporting standard(s).



---

**Shane Stewart**

President & CEO

**PDI**<sup>®</sup>  
**Group of Companies**

**Policy:** Communication

**Department:** Health, Safety and Environment

**Policy No.** PDI HSE – P016

**Relevant Standard No.** PDI HSE – S016

Communication is the key to a healthy, safe and productive workplace. It is needed to ensure roles and directions are understood; to warn against dangers; to avoid unsafe practices; to promote critical emergency response and particularly to learn about (and from) the concerns and hazards that workers encounter.

The company uses various methods for communicating Safety across the organization. This communication is both formal and informal, scheduled and routine, and in response to various emergencies, incidents that have occurred, or in direct response to a risk.

In addition, various communication channels will be used by the company to facilitate communication coming from Senior Management, and to provide a means for two-way communication and dialogue among management and workers.



---

**Shane Stewart**

President & CEO

**PDI**<sup>®</sup>  
**Group of Companies**

**Policy:** Return to Work and Re-employment

**Department:** Health, Safety and Environment

**Policy No.** PDI HSE - P017

**Relevant Standard No.** N/A

Priestly Demolition Inc. recognizes that our employees are our most important assets. As such, we are committed to providing a safe and healthy workplace. The Return to Work and Re-employment (RTW) Policy, and the supporting RTW procedures, are designed to aid workers in safely returning to employment at the earliest possible date, following a work related injury or illness.

The primary goal of the Return to Work Policy and program is to return the worker to work that is both suitable and available. Suitable work is safe and productive, and consistent with the worker's functional abilities.

This policy is compliant with applicable WSIB (Ontario) guidelines and human rights legislation.



---

**Shane Stewart**

President & CEO

**PDI**<sup>®</sup>  
**Group of Companies**

**Policy:** Environment

**Department:** Health, Safety and Environment

**Policy No.** PDI HSE - P018

**Relevant Standard No.** N/A

Priestly Demolition Inc. is committed to reducing its impact on the environment. We will strive to improve our environmental performance over time and to initiate additional projects and activities that will further reduce our impacts on the environment.

Our commitment to the environment extends to our customers, our staff, and the community in which we operate. Senior Management is committed to:

- Comply with all applicable environmental regulations;
- Participate in the recycling of project materials and minimizing waste, to reduce impact on landfills and promote recovery of valuable resources;
- Prevent pollution whenever possible;
- Inform all of our staff on our environmental processes and empower them to contribute and participate;
- Communicate our environmental commitment and efforts to our customers, staff and our community; and
- Continually improve over time by striving to measure out environmental impacts and by setting goals to reduce these impacts each year.

Every employee and every contractor on Priestly Demolition premises is expected to follow this policy and to report any environmental concern to Priestly Demolition management. Managers are expected to take prompt action.

This policy will be reviewed annually by senior management at Priestly Demolition.



---

**Shane Stewart**

President & CEO

# PDI<sup>®</sup>

## Group of Companies

**Policy:** Workplace Violence and Harassment

**Department:** Human Resources

**Policy No.** PDI HR - 013

**Relevant Standard No.** 3

### Policy

PDI Group of Companies (“PDI”), has a policy prohibiting workplace violence or workplace harassment, or threats of violence or harassment. This standard shall be reviewed annually and reassessed every five years or as needed to ensure risks are appropriately managed.

### Purpose

PDI believes that all employees have the right to work in a workplace that is free from violence and harassment and is committed to providing a safe working environment in which all individuals are treated with respect and dignity. The purpose of this policy is to establish procedures to reduce the risk of violence or harassment in the workplace, to outline the measures to respond to alleged incidents of violence or harassment in the workplace, and to foster workplace safety and security.

### Scope

This policy applies to any “employee” of PDI, which includes any part-time, full-time, casual or temporary employee as well as any individual who would be considered a “worker” for the purpose of the *Occupational Health and Safety Act* (“OHSA”).

### Definitions

***Threat:*** The implication or expression of intent to inflict physical harm or actions that a reasonable person would interpret as a threat to physical safety.

***Workplace Harassment:*** A course of vexatious comments or conduct against a worker in a workplace that is known or ought to reasonably be known to be unwelcome, or workplace sexual harassment.

Workplace harassment does not include a reasonable action taken by PDI relating to the supervision and direction of an employee or the workplace.

***Workplace Sexual Harassment:*** A course of vexatious comment or conduct against a worker in a workplace because of sex, sexual orientation, gender identity or gender expression, where the course of comment or conduct is known or ought reasonably be known to be unwelcome; or making a sexual solicitation or advance where the person making the solicitation or advance is in a position to confer, grant or deny a benefit or advancement to the worker and the person knows or ought reasonably to know that the solicitation or advance is unwelcome.

***Workplace Violence:*** The use, or attempted use, of physical force against a worker that could cause physical injury. Workplace violence also includes a statement or behavior that a worker could reasonably interpret as a threat to use physical force against him/her that could cause physical injury.

***“Workplace”:*** Any location where PDI business is conducted, including on or off PDI property, as well as remote work locations or any PDI event.

# **PDI**<sup>®</sup>

## **Group of Companies**

**Policy:** Workplace Violence and Harassment

**Department:** Human Resources

**Policy No.** PDI HR - 013

**Relevant Standard No.** 3

### **Prohibited Behaviour**

The following behaviour is prohibited in the workplace and will result in discipline up to and including termination of employment for cause ("Prohibited Behaviour"):

- Workplace violence or harassment, including workplace sexual harassment.
- Any threat or intimidation.
- Possession of a weapon of any kind on PDI property (including any parking lot or other exterior premise), while engaged in any activity for the PDI in another location, or at a PDI sponsored event, unless such possession or use is a requirement of the job.
- Assault.
- Physical restraint or confinement.
- Dangerous or threatening horseplay.
- Blatant or intentional disregard for the safety or well-being of another.
- Retaliation against anyone who has made a complaint or who has participated in an investigation under this Policy.
- Failure to report an incident of workplace violence, harassment or sexual harassment, of which an employee is aware.
- Harassment that occurs through any digital or online medium, including but not limited to emails, social media, text messages, or any virtual communication platform, is strictly prohibited. This includes, but is not limited to, offensive, threatening, or abusive behavior conducted virtually.
- Any other act considered by PDI to be a violation of this Policy, whether or not specifically set out above.

### **Safety Measures**

Any employee who is a victim of or witness to any form of violence or harassment should:

- Summon for immediate assistance and remove themselves from immediate danger
- In the case of physical violence call for assistance and, if warranted, 911 (the police)
- Report the incident/concern to their Manager, People Success or any member of Senior Management team.

### **Risk Assessment**

A risk assessment has been conducted of the workplace and will be repeated as often as deemed necessary by PDI's Joint Health and Safety Committee ("JHSC"). The results of the assessment will be presented to the JHSC.

If any unreasonable risk is identified during the assessment, PDI and the JHSC will work together to determine and implement appropriate measures to address the identified risk.

**Policy:** Workplace Violence and Harassment

**Department:** Human Resources

**Policy No.** PDI HR - 013

**Relevant Standard No.** 3

## Disclosure of Risk of Violent Behaviour

PDI will provide information to an employee if the employee is expected to encounter an individual with a history of violent behaviour of which PDI is aware and the individual poses a risk of workplace violence likely to result in physical injury. However, PDI will only disclose information reasonably necessary to protect an employee from violence.

## Reporting Violence or Harassment in the Workplace

All employees have an obligation to address warning signs, incidents and complaints immediately so as to prevent situations from escalating to incidents of violence and harassment in the workplace. As such, any employee who is subjected to, a witness of, or has knowledge of, any alleged incidents or threats of workplace violence or harassment or sexual harassment or identifies warning signs of possible scenarios that may escalate, is required to immediately report the alleged incident to their Supervisor. This includes reporting alleged domestic violence situations that would likely expose an employee to physical injury in the workplace. Any employee filing a report of violence or harassment or sexual harassment in the workplace is required to do so in writing using the **Workplace Harassment Report Form** available on Kissflow. Alternatively, it can be accessed under Library Docs on Keystyle.

If the alleged harasser is a member of Management or a supervisor, the employee can report an incident or threat of workplace harassment to anyone in the People Success Team.

This Policy does not preclude an employee from contacting the Police where he or she feels it is appropriate; nor is this Policy intended to discourage an employee from taking steps to contact emergency services as needed.

## Investigate and Respond

An incident or complaint of potential or actual workplace violence or harassment or sexual harassment will be investigated promptly and impartially, with due process to any person accused of violating this Standard.

Information obtained about an incident or complaint (including any identifying information) will not be disclosed unless the disclosure is necessary for the purpose of investigating or taking corrective action or if required by law. Although PDI makes every effort to keep the incident or complaint as confidential as possible, it is not always possible to do so in the course of investigating or resolving an incident or complaint of potential or actual workplace violence or harassment or sexual harassment.

The investigation will generally be conducted by the People Success Team with additional external investigators as determined appropriate by Senior Management (henceforth known as the "investigation team)." An incident or complaint will be investigated in a manner appropriate in the circumstances. This may include an internal investigation or the use of external resources. The investigators may undertake some or all of the following procedures as deemed appropriate in the circumstances:

# **PDI**<sup>®</sup>

## **Group of Companies**

**Policy:** Workplace Violence and Harassment

**Department:** Human Resources

**Policy No.** PDI HR - 013

**Relevant Standard No.** 3

- Review the allegations
- Conduct interview(s) of the complainant, potential witnesses, the subject of the complaint, or anyone with relevant information
- The person who is subject of the complaint will be advised of the substance of the complaint against them in the course of the investigation
- Collect and review documents
- Review the workplace or sites where the incident is alleged to have occurred

After conducting its investigation, the investigation team will make an objective assessment of whether there has been a violation of this Policy. The alleged victim and perpetrator (if a worker) will be informed in writing of the results of the investigation and of any corrective action that has been taken because of the investigation. The Company may reassign, or place on paid leave, either or both complainant and individual who is the subject of the complaint during the investigation or (depending on the outcome) after the investigation is complete.

In instances where PDI becomes aware of domestic violence circumstances in which potential violence hazards may be introduced in the workplace, PDI will investigate each circumstance on a case-by-case basis and identify reasonable precautions that can be taken to protect the victim of abuse and those within the organization who could also be at risk.

An employee found to have engaged in Prohibited Behaviour will be subject to disciplinary action, up to and including termination of employment for cause.

Although PDI must normally provide the result of an OHSA investigation to the JHSC, PDI is not required to provide the JHSC with the result of an investigation regarding an incident or complaint of workplace harassment.

### **Training and Education**

PDI will provide information and training to every employee on this Policy, which shall include procedures for preventing, reporting and responding to incidents of workplace violence and harassment.

# PDI<sup>®</sup>

## Group of Companies

**Policy:** Possession and Impairment

**Department:** Human Resources

**Policy No.** PDI HR - 010

**Relevant Standard No.** 2

### Intent

PDI Group of Companies (“PDI” or the “Company”) is committed to a safe working environment for all employees and subcontractors with respect to potential effects of impairment on safety, performance and judgement. Alcohol, drugs, medications, as well as the impact of personal problems and fatigue can impact an employee’s ability to perform their work in a safe and productive manner.

To help ensure a safe and healthy workplace, and in accordance with this Policy, the Company reserves the right to prohibit certain items and substances from being brought onto, or being present in, the workplace. The Company also prohibits any employee from reporting to work or working while under the influence of any drug or alcohol.

This Policy will be interpreted in accordance with all applicable laws, including but not limited to human rights legislation.

### Application

This policy applies to all employees when they are at work, travelling to/from work locations, and/or conducting business on behalf of PDI.

### Definitions

For the purpose of this Policy, the following terms will have the following meaning:

Intoxicant	Any substance, whether legal or illegal, and whether or not it has been prescribed or authorized by a medical practitioner, which has the potential effect of intoxicating its user and/or altering an employee’s ability to perform his or her duties. This includes, but is not limited to alcohol, opiates, hallucinogens and cannabinoids (such as marijuana).
Impairment	refers to a reduction in the ability to perform a function or activity due to a physical, mental, or emotional condition. It typically involves a limitation or loss of normal capabilities in one or more areas of functioning. Impairment can be caused by injury, illness, aging, substance use, or congenital conditions
Incident	An occurrence, circumstance or condition that caused significant damage to person, property, reputation, security or the environment. An Incident can result from an employee’s action, or failure to take action.
Near Miss	An occurrence, circumstance or condition that had the potential to cause significant damage to person, property, reputation, security or the environment. A Near Miss can result from an employee’s action, or failure to take action.

# PDI<sup>®</sup>

## Group of Companies

**Policy:** Possession and Impairment

**Department:** Human Resources

**Policy No.** PDI HR - 010

**Relevant Standard No.** 2

Workplace	Any site at which an employee performs work related to his or her employment with PDI, including a customer work site or any place an employee is located while acting in his or her capacity as a PDI employee or while representing the Company.
-----------	--

### Prohibited Behaviour

The following behaviour is strictly prohibited, and may incur disciplinary action up to, and including, termination of employment for cause:

- Reporting to work or working while impaired as defined above, or under the influence. This includes where an employee is off-duty and called in to work. In such case, if an employee is impaired by any Intoxicant at the time the call is received, it is the employee's obligation to advise the Company he or she is unfit to work due to the influence of an Intoxicant.

This only includes if they are impaired mentally or cognitive, the employee is obligated to advise the company they are unfit for work due to their current state.

- The use, possession, sale, manufacturing or dispensation of any Intoxicant at the Workplace (save for where expressly permitted in this Policy).
- Failing to report the use of any Intoxicant as required under this Policy.

Any Intoxicant found at the Workplace which PDI believes is, or may be, illegal will be turned over to the appropriate law enforcement agency.

### Prescribed or Authorized Intoxicant

Where an employee may be required to possess or use an Intoxicant for medical purposes at the Workplace, the employee is required to advise the People Success Team in advance of bringing such Intoxicant to the Workplace and/or prior to appearing at the Workplace under the influence of such Intoxicant. Once advised the People Success Team may seek reasonable medical information in connection with the use of such Intoxicant and will work with the employee to determine whether the presence or use of the Intoxicant can be accommodated within the bounds of PDI's obligations under applicable health and safety and human rights legislation. Where accommodation includes the employee possessing and/or using the Intoxicant in the Workplace, the employee will be provided with written permission from PDI for such possession and/or use, on the terms and conditions set out therein.

Even in respect of an Intoxicant possessed or used for medical purposes, failure to advise PDI in advance of bringing the Intoxicant to the Workplace or attending at the Workplace under the influence of the Intoxicant is strictly prohibited and will lead to discipline up to and including the termination of employment for cause.

### Work-Related Events

**Date of Issuance:** 11/23/2021

**Date of Last Review:** 01/16/2026

**Rev. No.** 2

# PDI<sup>®</sup>

## Group of Companies

**Policy:** Possession and Impairment

**Department:** Human Resources

**Policy No.** PDI HR - 010

**Relevant Standard No.** 2

There may be instances where an employee, in the course of his or her employment, attends a work-sponsored function, conference, or client social event where alcohol and/or legal Intoxicants are served. It will not be a violation of this Policy for an employee to consume alcohol and/or legal Intoxicants at such an event. In such circumstances, an employee is expected to consume alcohol and/or legal Intoxicants responsibly, avoid impairment, exercise good judgement, and maintain professional decorum as a representative of the Company. Where alcohol and/or legal Intoxicants are consumed while an employee is conducting Company business, no employee shall operate a vehicle while under the influence, contrary to law. Safe alternate transportation must be arranged (*e.g.*, taxi, public transportation, *etc.*).

### Inspection

PDI reserves the right to:

- With reasonable cause, inspect any and all property on its premises for the presence of an Intoxicant.
- Request or require an employee to undergo drug and/or alcohol testing as described below.

An employee found in possession of an Intoxicant in the Workplace (save and except an Intoxicant for which the employee has sought, and obtained, written permission to possess and/or use in the Workplace), or who refuses to cooperate in an inspection, may be subject to disciplinary action up to and including the termination of employment for cause.

### Accommodation

PDI is committed to providing assistance and support to all of its employees. We encourage any employee who suspects he or she may have a substance dependency or emerging alcohol or drug problem to seek advice and treatment.

Where an employee in a safety-sensitive position has a drug or alcohol dependency, the employee is required to disclose their use of drugs and/or alcohol to PDI. The purpose of this requirement is to protect the health and safety of all employees in the workplace. Where an employee discloses a drug or alcohol dependency, the employee will be provided with accommodation consistent with the Company's obligations under applicable human rights legislation. However, such disclosure must occur *before* an employee is involved in an Incident or Near Miss in the Workplace. PDI places primary importance on deterring similar behaviour by other employees and will terminate an employee for failing to disclose drug or alcohol use in accordance with this Policy, unless termination is unjust in the circumstances.

### Drug and Alcohol Testing

In certain circumstances, PDI may require an employee in a safety-sensitive position to undergo a drug and/or alcohol test to assess whether the employee is under the influence of an Intoxicant:

Reasonable Suspicion of Impairment

# **PDI**<sup>®</sup>

## **Group of Companies**

**Policy:** Possession and Impairment

**Department:** Human Resources

**Policy No.** PDI HR - 010

**Relevant Standard No. 2**

Where there is reasonable suspicion to believe an employee may be under the influence of an Intoxicant, PDI may require the employee to undergo drug and/or alcohol testing. Reasonable suspicion may be based on an observed violation of this Policy, strong circumstantial evidence, or specific and objective observations about the employee's actions, conduct, appearance or demeanor that would suggest the employee may be impaired.

In the event PDI has reasonable cause to believe an employee is under the influence, in contravention of this Policy, the employee will immediately be required to cease working. PDI will explain to the employee why it has reasonable cause to believe the employee is under the influence of drugs and/or alcohol and the employee will be given the opportunity to respond. If PDI continues to have reasonable cause to believe the employee may be under the influence of drugs and/or alcohol in the workplace, the employee may be removed from the Workplace pending further investigation, which may include drug and/or alcohol testing.

### Post-Incident or Near Miss

Where an employee is involved in an Incident or Near Miss, the employee will immediately be required to cease working. PDI will perform an initial inquiry to determine what factors may have contributed to the Incident or Near Miss, which may include speaking with the employee. If there is no reasonable explanation for the Incident or Near Miss, the employee may be removed from the Workplace pending further investigation, which may include drug and/or alcohol testing.

### Post-Reinstatement or Last Chance Agreement

If appropriate, an employee who has a drug or alcohol dependency may be required to undergo random drug or alcohol testing as part of an overall program to monitor compliance while at work, or upon return to work following a leave of absence. Whether such testing will be required will depend on the particular circumstances.

In all of the circumstances, testing will be conducted at a facility designated by PDI, at no charge to the employee and will be conducted in accordance with applicable law. The test results will be disclosed to PDI but will be kept as confidential as possible.

## **Violation**

An alleged violation of this Policy may result in removal from the Workplace pending further investigation. Where PDI concludes an employee has violated this Policy, this may result in disciplinary action, up to and including the termination of employment for cause.

It is a violation of this Policy to refuse to comply with a request by PDI to submit to an alcohol and/or drug test made in accordance with this Policy, refuse to authorize the testing facility release the results of an alcohol and/or drug test undertaken in accordance with this Policy, or to tamper with a sample provided for such testing.

## **Shared Responsibility**

Every employee has a legal responsibility to identify and report a potential safety risk in the workplace. Any employee who has reason to believe another employee is in possession of, or under the influence of, an Intoxicant in the Workplace has a positive obligation to forthwith report such risk to his or her Manager or People Success.

### **1.2.3. Health & Safety Roles and Responsibilities**

All employees have a role in ensuring a safe work environment at all of our workplaces. The following outlines the responsibilities of employees and visitors.

#### **Senior Management**

Senior management is responsible for, but not limited to to:

- Ensuring adequate resources and processes are in place;
- Ensuring HSE performance is a Key Performance Indicators (KPI) in performance reviews;
- Acknowledging and promoting continuous improvement of HSE;
- Reviewing and supporting the established HSE objectives and targets;
- Demonstrating leadership and being actively involved in incident/hazard reporting, investigation and management;
- Communicating HSE requirements and expectations to personnel, contractors and other relevant stakeholders; and
- Providing opportunities for the involvement of personnel and other stakeholders in activities designed to inspire improvements in HSE performance.

#### **Line Management**

Line management is responsible for, but not limited to:

- Implementing the HSE Management Program within their areas of responsibility;
- Ensuring effective compliance with the HSE Management Plan;
- Providing leadership to meet HSE requirements and expectations to achieve HSE objectives;
- Ensuring all personnel are adequately qualified, suitably trained, and have sufficient experience to perform work safely;
- Promoting HSE as an integral element of conducting business;
- Supporting a high level of HSE awareness; and
- Ensuring all reasonable measures are taken to prevent injuries and illnesses to personnel, including workers of contractors and members of the public exposed to worksite hazards under their control.

#### **Foremen & Supervisors**

Supervisory personnel are responsible for, but not limited to:

- Ensuring compliance with HSE policies, programs, standards, procedures, plans, and regulatory requirements as applicable;
- Ensuring all personnel are adequately qualified, suitably trained, and have sufficient experience to perform work safely;
- Ensuring management is promptly informed of actual and high potential severity incidents and near misses;

# 2026 Health and Safety Manual

## Health, Safety & Environmental



- Ensuring incidents are reported and investigated as required, and that corrective action is taken to prevent a recurrence;
- Ensuring hazards are eliminated or adequately controlled to the extent reasonably practicable;
- Ensuring hazard assessments are conducted at all worksites;
- Monitoring the worksite and correcting any unsafe conditions or unsafe behaviours; and
- Ensuring personnel are trained in the correct use, care, limitations and assigned maintenance of personal protective equipment (PPE).

### Health, Safety and Environment Personnel

Health, safety, and environment personnel provide expert advice regarding Company requirements and other recognized best practices in HSE. Specific responsibilities include, but are not limited to:

- Ensuring that the management team are aware of their responsibilities and their deliverables in terms of both work output and their personal behaviours;
- Providing timely advice to the management team regarding opportunities to achieve the highest standards of HSE;
- Developing and implementing initiatives to engage management, supervision and personnel in achieving the HSE vision;
- Demonstrating leadership and commitment to the achievement of HSE objectives and to the success of all Company / office HSE initiatives;
- Periodically reviewing and reporting on HSE performance in their area as required, to the responsible Manager and to the to the Company corporate HSE function;
- Encouraging management, supervision and others and recognize their contributions to the Health, Safety and Environmental performance;
- Actively promoting HSE excellence;
- Supporting a strong HSE culture;
- Coaching and correcting unsafe behaviour and correcting inappropriate HSE performance;
- Understanding and applying legislative HSE requirements;
- Having and applying a full working knowledge of all applicable HSE Management Systems;
- Consulting on and resolving HSE issues including supporting incident investigations, etc..;
- Recognizing and rewarding people who have positively affected HSE; and
- Generating contingency plans to respond to emergencies.

### All Personnel

All personnel are responsible for, but not limited to:

- Actively supporting HSE excellence and the achievement of the HSE vision and a strong safety culture;
- Refusing to perform unsafe work or operate unsafe tools or equipment believed to be hazardous and reporting the refusal to perform unsafe work to the supervisor immediately;
- Taking reasonable care to protect the environment and the health and safety of themselves and others;

# 2026 Health and Safety Manual

## Health, Safety & Environmental



- Actively participating and cooperating in activities for the purpose of protecting the environment and the health and safety of personnel on all worksites;
- Complying with all HSE policies, programs, standards, procedures, and regulatory requirements;
- Reporting all HSE incidents to their supervisor and participating in related incident investigations; and
- Reporting all unsafe conditions and potential hazards to their supervisor immediately.

### Visitors

Visitors must immediately check-in immediately upon arrival at a site or office. Visitors are responsible for following the HSE requirements of the site and all instructions of the supervisor or personal escort while on any company workplace.

### 1.2.4. Health, Safety and Environmental Objectives

The objectives of the HSE management system are to keep us up to date with legal requirements as well as to encourage the continual improvement of our own performance. We therefore base our annual health, safety and environmental objectives on:

- Any new or revised health, safety or environmental legislation and/or authoritative guidance;
- Results of inspection monitoring during the previous year(s);
- Feedback from employees and other interested parties, such as clients;
- Accident and incident data compiled during the previous year(s);
- Training achievements during the previous year(s), and future training requirements;
- Results of performance indicators published for the previous year(s); and
- Results of audits and reviews of this HSE system during the previous year(s).

The annual objectives are supported by an action plan and communicated internally with our personnel.

### 1.2.5. Legal and Authoritative Guidance

Legal and authoritative guidance is identified by various means, including:

- Applicable regulatory agency instruction and guidelines in the jurisdiction in which we are operating
- Membership of associations and institutions;
- Canadian Centre for Occupational Health and Safety (CCOHS)
- Infrastructure Health & Safety Association (IHSA)
- Professional and industry sector publications and periodicals.

Our health, safety and environmental managers / advisors define current and relevant legal and authoritative

guidance for our business, using the above sources.

Applicable identified legal and authoritative guidance is used to establish, implement and maintain this HSE System.

Applicable legislation is readily available at every workplace.

### **1.2.6. Health, Safety and Environmental Performance Indicators**

Company senior management sets the appropriate company wide and project performance indicators based on our annual objectives and performance targets.

The HSE department reports to senior management on our overall HSE performance by providing both proactive and reactive HSE performance results in monthly updates and during the annual management review.

### **1.2.7. Hazard Identification & Risk Assessment**

The identification of hazards, including occupational health hazards, and evaluating the risk that these hazards pose in the workplace is a legal requirement and comprises a critical step in planning of all of our activities.

The results of risk assessments enable the organization to evaluate available risk reduction strategies and prioritize resources for effective risk management.

All HSE risks shall be managed using the Hierarchy of Controls (Figure 1.2.7a), to achieve a tolerable level of risk that has been reduced to **As Low As Reasonably Practicable (ALARP)**.

Personnel shall be advised of HSE risks and hazards that are present, together with the appropriate mitigation and control measures that are implemented. The company includes occupational health risks in all hazard assessments.

Detailed methods of undertaking, implementing, reviewing and revising risk assessments are contained in Hazard Identification and Risk Management standard in section 2.

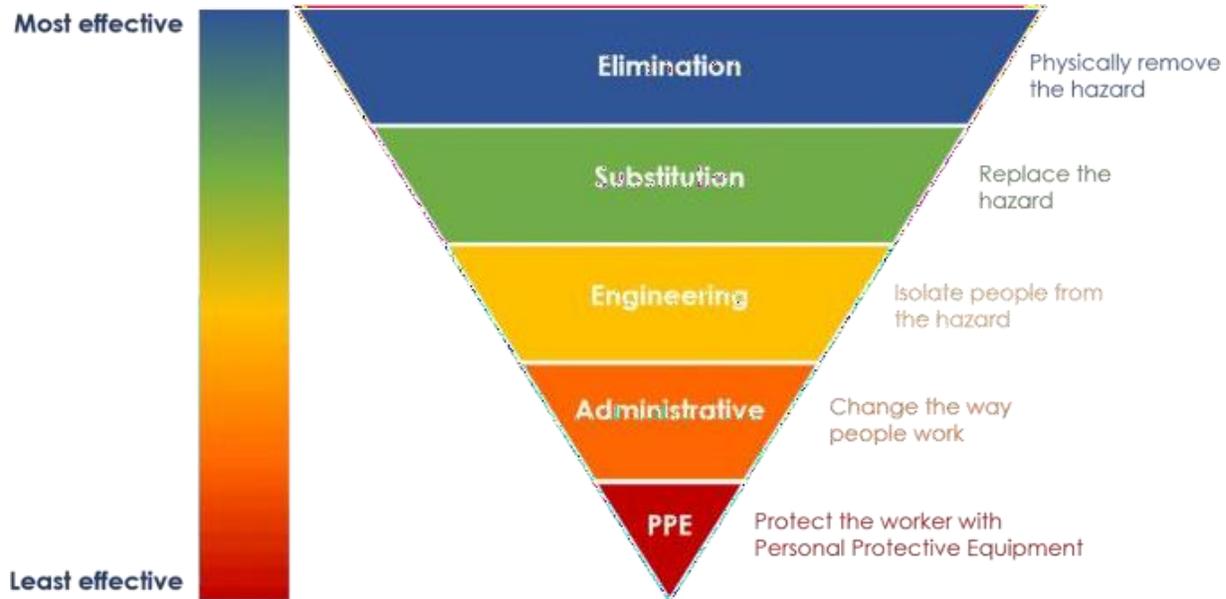


Figure 1.2.7a: Hierarchy of Controls

## 1.2.8. Project Health, Safety and Environment Plans

The project plans are 'live' management tools based on the identified risks relevant to a specific project.

Project plans contain:

- Scope of work
- Emergency response information
- Applicable SDS information
- Legal and regulatory information i.e. Form 100, WSIB poster etc.
- Details of the arrangements for controlling significant safety risks;
- Details of the arrangements for controlling significant health risks; and
- Details of the arrangements for controlling significant environmental risks

The applicable project manager is accountable for each developed plan with the assistance of the HSE department as required. The health, safety and environment plan will be available for review by the relevant client before work commences and throughout the project. Each plan is to be fully maintained, reviewed and revised on a periodic basis, to ensure it continues to address the activities and hazards presented at that specific project

## 1.3. Do: Implementation and Operation

### 1.3.1. Orientation

Every employee receives relevant health, safety and environmental orientation training as follows:

- Our employees (or agency and union employees) are provided with a scope-appropriate company induction, including the requirements of this HSE System, as part of our standardized onboarding process.
- Visitors to our offices are made aware of emergency procedures by reception and their host.

No person is to commence tasks on site or access an area unaccompanied by a fully inducted person without first receiving a full site-specific induction. Visitors to site are to receive a full induction, or a visitor's induction and supervised while on site.

Note: any agency or temporary personnel contracted to cover short term absences are to receive an appropriate site induction before commencing work and be supervised by site management.

### 1.3.2. Training, Awareness and Competence

It is essential that everyone who works under our control (including employees, agency or union workers and subcontractors) is competent to complete the duties that are assigned to them.

Field and office staff have varied training requirements and competency requirements. As a result, we have developed a training matrix, defining the general position requirements and project specific training requirements for our personnel.

Additional methods of determining HSE training requirements for individuals may include:

- Personal development reviews;
- Staff development programs;
- Career changes and opportunities;
- Task requirements;
- Health, safety and environment monitoring; and
- Recommendations from accident and incident data.

All employee's records of training, qualifications and memberships are held in our employee files under the control of our Human resources department. Access to these records is limited to the individual employees that the records relate to, and on an as required basis by management.

Our site management checks the competency and training records of personnel against project risks and

requirements before they commence work.

### 1.3.3. Daily Task Briefings

Site workers receive a task briefing to explain the specific hazards, risks and control measures identified by the Field Level Hazard Assessment (FLHA) tool.

The briefing takes place:

- Before the task commences;
- Before changes to the method of work are implemented; and
- Before any new personnel or persons previously absent from work are permitted to carry out the task (e.g. people returning from holiday or sickness).

The FLHA tool also incorporates a “toolbox” meeting component, which documents attendance and any safety information or topics discussed in addition to the review of the activities, hazards and required control measures for the activities being executed.

### 1.3.4. Hazard Identification

Observed hazards should first be addressed by the observer on a ‘see and fix’ basis, provided that they are capable and competent to do so. If the observer of the hazard cannot rectify the hazard, then they should report the hazard to their supervisor. The safety observation tool is available to all personnel.

### 1.3.5. Weekly Site Safety Meetings

Projects with a field component lasting longer than one week will hold a site safety meeting on a weekly basis. The content and attendance will be recorded and form part of the project files.

### 1.3.6. Participation and Consultation

We consider the knowledge and experience of everyone involved in our business to be a significant key to managing health, safety and environmental risks. Individuals at all levels, including agency workers and those of subcontractors are encouraged to participate in the process.

### 1.3.7. Communication and Information

All employees, especially those in managerial and supervisory roles, are required to provide a positive example in communicating the requirements of this HSE System. As part of our HSE culture, formal meetings start with a safety moment. Meeting participants are either rotated or randomly encouraged to share experiences and observations regarding HSE either at home or work. The intent is to focus on our values and ensuring HSE is incorporated into our daily business operations. Customers and visitors will be encouraged to participate.

Effective communication is achieved through many methods including visual, verbal and written.

Examples of verbal communications include, but are not limited to:

- one-on-one conversations between different parties, at and between all levels;
- monitoring by health, safety and environmental managers / advisors;
- site visits by Project Managers and senior management;
- office and construction site health, safety and environmental committee meetings (Joint Health & Safety Committee, for example);
- business management meetings;
- management meetings; and
- Health, safety and environmental manager / advisor meetings.

Examples of written (or electronic) communications may include:

- our business management system;
- this HSE System;
- legal posters;
- notices, posters, newsletters, alerts and other health, safety and environmental announcements posted on “ safety boards”;
- signage;
- risk assessments and method statements;
- push notifications on cell phones;
- health, safety and environmental plans;
- site health, safety and environmental booklets; and
- Employee website.

Other forms of communication

- visitor information;
- monitoring reports;
- audit reports;
- business plans; and
- Performance programs.

### 1.3.8. Joint Health and Safety Committees

Through the Joint Health and Safety Committee (JHSC), or in the case of a workplace with less than 20 personnel a Health & Safety Representative, all personnel have representation on matters that may affect their health and safety, or may have an environmental impact. The committee also acts as a sounding board for employee concerns and suggestions.

JHSC meetings are scheduled and occur on a minimum quarterly basis and the meeting minutes are posted to the Health and Safety board. The Joint Health & safety committee standard in Section 2 details all the expectations of the JHSC and their roles within the company.

### 1.3.9. Preventative Maintenance

A comprehensive program is in place to ensure that all equipment used by the company is maintained in accordance with applicable OEM and regulatory standards.

Every piece of equipment is identified with a distinct unit number. The required maintenance status of each piece of equipment (where applicable or as prescribed by the OEM or regulation) is then identified and tracked.

### 1.3.10. Contractor Selection

Our procurement management processes ensures that consultants, subcontractors, etc. are assessed for competence, including health, safety and environmental management competence.

A pre-qualification selection process is completed evaluating all aspect of a potential contractor including historical HSE performance before they are eligible to perform work

### 1.3.11. Emergency Response

The arrangements for emergency planning and procedures for sites and offices are documented in the applicable local health, safety and environmental plans. In the case where we are not the constructor we will work with the constructor to utilize established processes.

The following emergency issues are addressed in the plans – based on project scope and identified hazards / risks:

# 2026 Health and Safety Manual

## Health, Safety & Environmental



- Spillage or release containment procedures
- First aid requirements
- Access and egress from height, below ground level, or a confined space (if required)
- Access and remove injured, ill or trapped person
- Nearest medical facilities and transport requirements

Emergency procedures are reviewed periodically to ensure they reflect ongoing project conditions, but may also be reviewed after any practice drill(s) or real emergency, to address any lessons learned or any procedural inadequacies identified.

Subcontractors are also required to identify their own emergency planning and procedures prior to the commencement of their work. These requirements are to be initially identified in subcontractor's task risks assessments and work plans.

All employees are to be informed of the emergency procedures at their place of work, and given instructions on what to do in the event of an emergency. This is achieved through the new employee orientation and any site specific orientations.

### 1.3.12. Managing Changes

The organization considers hazards and potential risks associated with new processes or operations at all project stages as well as changes in the organization, existing operations, products, services or suppliers.

The following are examples of conditions that trigger management of a process change:

- New or modified technology (including software), equipment, facilities or work environment
- New or revised procedures, work practices, design specification or standard
- Significant changes to the company's organizational structure and staffing, including the use of contractors
- Modifications to health and safety devices and equipment or controls.

The content of completed local / project records, e.g. risk assessments, health, safety and environmental plans, may be modified due to client requirements. It is acceptable to use client based material (i.e. onsite processes or procedures, forms or similar documents) as long as a review has been completed to ensure that these documents meet or exceed our existing internal standard(s).

Project level changes to documentation must be approved by the project manager. These locally controlled documents do not form part of the HSE System but are part of the project management files for that specific project. Changes are then be communicated to all relevant personnel as applicable throughout the project lifecycle

## 1.4. Check

### 1.4.1. Training Effectiveness

Checks on the effectiveness of training may be analyzed by training course assessment forms and/or 'on-the-job' monitoring to determine if competency has been attained and maintained.

### 1.4.2. Internal Inspections

Inspections of site conditions are performed by applicable supervisors, project management and HSE personnel, taking into account the applicable risks at the workplace, at the time of inspection. Occasionally, external inspection resources may be used to cover for holidays, illness, etc.

### 1.4.3. External Inspections

All external inspections are to be recorded to provide a record of the date, inspector, methods, location and findings/ results of the inspection. Types of external inspections to be recorded include:

- Client / owner HSE Team inspections;
- Client / owner Project Manager inspections;
- Fire Services inspections;
- Ministry of Labor (OHS) or Ministry of Environment (Abatement or Enforcement) inspections
- COR Audits provincial audits equivalent to COR
- TSSA

Records are kept on the office / onsite and recorded. Instructions on what and how to record inspections are detailed in S.02 Workplace Inspection Standard.

### 1.4.4. Internal Audits

Internal audits are performed by personnel who have specialist skills in the auditing process. The audits are required to evaluate compliance with issues such as:

- Followup actions from earlier inspections and audits;
- Compliance with defined parts of this HSE system;
- Compliance of this HSE system with legal requirements and best practice;

# 2026 Health and Safety Manual

## Health, Safety & Environmental



- Compliance with learning requirements for individuals, with the company training matrix
- Filing of records in compliance with requirements;
- Verifying that responsibilities are carried out;

Results of all internal audits are presented in the form of a written report. Management responsible for the areas audited shall review, agree and correct deficiencies revealed by audits, and inform senior leadership of the progress and outcomes. Management may instruct additional audits.

### 1.4.5. External Audits

External audits may be carried out:

- To meet statutory requirements, e.g. By fire services or local authority;
- By clients in accordance with contractual obligations;
- By certification bodies; or
- By external consultants called upon to provide specific advice.

The results of external audits are to be discussed at senior management level and, if required, an action plan is developed to implement any corrective actions.

### 1.4.6. Types of Monitoring

Informal monitoring is an ongoing requirement of our management personnel.

Formal monitoring is carried out on a:

- Time related basis; or
- More frequently if risks are high; or
- Level of implementation are below the required standards.

Monitoring of low risk activities are given less priority than high and medium risk activities.

### 1.4.7. Proactive Performance Monitoring

Proactive reporting is a key component in ensuring the health and safety of our workforce and is a key indicator of the overall performance of individuals, projects and the company as a whole. Examples of proactive safety activities include:

- First aid reports
- Near miss report

- Hazard identification
- Safety observations
- Safety suggestions
- Positive safety contributions
- Documented conversations regarding health & safety at all levels

Proactive indicators are tracked and are included in the overall performance results of projects and the company as a whole. The forms to record the proactive safety activities are available in section 4.

### 1.4.8. Reactive Performance Monitoring

Data for reactive performance monitoring is contained in the electronic reporting system and includes the measurement of:

- Non-conformance with safety standards, practices or procedures
- Occupational illness,
- Accident and incidents,
- Environmental incidents,
- Vehicle incidents.

### 1.4.9. Non-conformance and Observations

Any deviation from agreed standards and specific work practices, instructions or regulations that could directly or indirectly lead to injury, illness, property damage or impact on the environment is classed as a non-conformance.

Day-to-day observations may raise non-conformance issues that require corrective actions. Non-conformances are also recorded during the planned proactive performance monitoring.

External inspections and internal / external audits may also identify non-conformances that require corrective actions

### 1.4.10. Accidents and Incidents

The primary purpose of reporting and recording of all incidents is to identify and provide open, honest and comprehensive information on the immediate and underlying causes, so that any necessary actions can be taken to reduce the risk of reoccurrence. All accidents and incidents are to be reported in a timely matter, with the notification period and level of investigation corresponding to the level of actual severity or

potential severity. The process for reporting accidents through line management and to top management level, and to the enforcing authorities is clearly defined in the standard in S.01 – Incident and accident reporting. Reportable incidents are as follows:

- Near Miss;
- Minor injury (no first aid);
- First aid (minor with injury);
- Medical Aid;
- Occupational disease;
- Modified Duties;
- Lost time;
- Fatality;
- Environmental incident;
- Third party incident;
- Vehicle Incident;
- Property damage.
- 

### 1.4.11. Statistics

HSE data collected is used to provide measurements for the business, and each project. Measurements may include:

- Accident frequency rates per 200,000 hours worked;
- Collective injury and incident types;
- Provincial compensation plan statistics
- Number of days lost due to injury or work-related ill health.

The HSE department will provide feedback on any specific requirements to prioritize improvements to the senior leadership team.

### 1.4.12. Control of Documents and Data

All our employees can access the HSE System from any office or project site via portable electronic devices, subject to connectivity. Information or documents contained in the HSE System can also be printed for use.

Completed HSE System online documents, e.g. risk assessments, method statements, health and safety plans, etc. are controlled electronically while hard copies are controlled at the local level.



Printed copies of the manual are considered uncontrolled, and the latest version of all the HSE program, including this manual, will always reside on the corporate intranet, accessible by all employees.

### 1.4.13. Archiving Documents

The archiving of completed documents, forms, etc. is essential for possible future retrieval. Online documents are automatically archived electronically, while hard copy documentation will need to be added to the archive manually.

All documents are to be legible, identifiable and traceable to the activities involved so that retrieval from archive is simple to achieve.

Disclaimer: The master of this document is controlled electronically. Printed copies of this document are not controlled. Document users are responsible for ensuring copies are valid prior to use.

## 1.5. Act

### 1.5.1. Corrective Actions

All incidents are reviewed by the operations management team on a regular basis with applicable project management personnel. The review will look at the adequacy of the investigation, identification of root causes and ensure identified corrective actions address the identified cause(s).

Following the identification of non-conformances, suitable corrective actions are implemented. It will be possible to correct some non-conformances immediately; others will require longer-term activity to complete appropriate remedial actions.

Continued failure to action recorded or observed non-conformances, especially those that are considered high risk or may otherwise lead to injury / incident or attract regulatory action are subject to formal, escalation to leadership to ensure resolution and correction. If the non-conformances show deficiencies in any section of this HSE System, the company management of change processes will be followed.

### 1.5.2. Disciplinary Actions

Formal disciplinary actions may result if anyone blatantly or continually breaches the requirements of the HSE System or related processes such as risk assessments, standards, practices or health, safety and environmental plans.

The progressive disciplinary policy is contained in the PDI employee handbook.

### 1.5.3. Program Review and Continuous Improvement

A formal management review of this HSE System takes place at least annually, (content as identified in the annual review policy and supporting standard) or sooner if:

- New/ revised legislation is to be enforced;
- New / revised authoritative guidance is published;
- Monitoring / auditing reveals significant deficiencies; and/or
- Reported or observed deficiencies in our policies, practices or procedures.

We are dedicated to the continuous improvement of our health, safety and environmental performance. Constructive comments from any of our employees, clients, designers, external auditors or subcontractors regarding this HSE System are encouraged. Comments and suggestions should be sent to the HSE team for

# 2026 Health and Safety Manual

## Health, Safety & Environmental



review and consideration.

All suggestions and items noted in the management review, will form the basis of the upcoming year's safety objectives and targets.

Disclaimer: The master of this document is controlled electronically. Printed copies of this document are not controlled. Document users are responsible for ensuring copies are valid prior to use.



# Section 2: Corporate Standards

# 2026 Health and Safety Manual

## Health, Safety & Environmental



The following standards are found in this section:

- Standard PDI HSE - S001, Safety Documents and Record Control
- Standard PDI HSE - S002, Hazard Assessment, Analysis and Control
- Standard PDI HSE - S003, Joint Health and Safety Committee
- Standard PDI HSE - S004, Procurement and Contractor Management
- Standard PDI HSE - S005, Company Rules
- Standard PDI HSE - S006, PPE Personal Protective Equipment
- Standard PDI HSE - S007, Preventative Maintenance
- Standard PDI HSE - S008, Training
- Standard PDI HSE - S009, Workplace Inspections
- Standard PDI HSE - S010, Investigation and Reporting
- Standard PDI HSE - S011, Emergency Preparedness
- Standard PDI HSE - S012, Statistics and Records
- Standard PDI HSE - S013, Legislation and Other Requirements
- Standard PDI HSE - S014, Management Review
- Standard PDI HSE - S015, Management of Change
- Standard PDI HSE - S016, Communication
- Standard PDI HSE - S017, Return to Work
- Standard PDI HSE - S018, WHMIS
- Standard PDI HSE - S019, Fatigue Management
- Standard PDI HSE - S020, Right to Refuse Unsafe Work

Disclaimer: The master of this document is controlled electronically. Printed copies of this document are not controlled. Document users are responsible for ensuring copies are valid prior to use.

# Safety Documents and Record Control

## Standard | PDI HSE – S001



---

### 1. OBJECTIVE

---

To define the minimum requirements for safety documentation, document control and record control.

---

### 2. SCOPE AND APPLICABILITY

---

This Standard shall be applied to all Company personnel, contractors and their subcontractors. Contractors may with management approval, however, utilize their own standards and procedures in so far as the requirements of their standards are at least equivalent to those of this standard.

---

### 3. RESPONSIBILITIES

---

The implementation of this Standard is the responsibility of Company senior management.

Company's managers are responsible for the application of, and compliance with, this Standard at work locations where they have operational responsibilities.

Contractors are responsible for their personnel, and their subcontractor's personnel, compliance with this Standard and / or other standard as agreed per Section 2 above.

Supervisors are responsible for the day-to-day application of this Standard.

Safety Department to approve any changes.

Joint Health and Safety Committee are responsible to review this standard.

All company personnel have a responsibility to comply with this standard.

All personnel have a duty of care, to their work team and others in relation to the application and maintenance of this standard, for work they, their work team or others undertake.

---

### 4. REQUIREMENTS

---

#### 4.1 General

- a. Documentation and record control is an essential part of the Health and safety management system and is necessary as an ongoing effort to show that the senior management is taking all reasonable precautions to protect the health and safety of employees while providing evidence of activities that have been performed and keeping track of company goals and corrective actions.
- b. Documents must be approved prior to use. Forms will be approved, as required, prior to publication and distribution.
- c. Digitally scanned documentation is considered a suitable copy of original documentation for documentation/record purposes.
- d. Documents and records shall be created, completed, and maintained in legible and readily identifiable formats. Where possible efforts will be made to digitally create, complete and sign.
- e. Approval signatures will be indicated on appropriate documents.

#### 4.2 Required Documentation

- a. Records will be kept as necessary to for audit purposes to demonstrate conformity to the Safety Management System as well as regulatory requirements, as appropriate. These include
  - i. Safety data sheets
  - ii. Accident and Incident reports
  - iii. Proactive reports / hazard observations
  - iv. Meeting minutes (including safety committees)

- v. Inspection reports
  - vi. PPE inspection forms as prescribed in the PPE Standard S006 i.e. “Daily Fall Protection Equipment Inspection Form”
  - vii. Service and maintenance records of equipment, as applicable
  - viii. Minutes of joint Health committee meetings and related inspections and documentation
  - ix. Regularity inspections, orders, and related documents
  - x. Applicable correspondence issued by legal authorities
- b. Project specific safety documentation will be stored in the electronic project files folder.
  - c. Company level and safety management programs shall be kept in a common electronic drive / web page accessible to employees as appropriate.
  - d. Any documents of an external origin that are required or necessary for the planning and operations of the safety program shall be form part of the required documentation. Third party documents include:
    - i. Permits
    - ii. Regulatory notifications
    - iii. Client specific documentation
    - iv. Relevant contract documentation
    - v. Third party stake holders as required.

### 4.3 Document Controls

- a. Documents shall be reviewed, updated, re-approved or withdrawn as necessary, using the document change request form
- b. Obsolete document shall be suitably identified to prevent their unintended use when they are retained.
- c. Changes to and current revision status of safety documents are identified and tracked with version numbers and / or date of revision clearly identified on paper versions. Published electronic forms will always be the most up to date versions.
- d. The relevant / most up to date versions of applicable documents are to be readily available at the point of use. The use of electronic documentation is preferred, when permitted by regulation or site conditions.

### 4.4 Privacy and Confidentiality

- a. Privacy and confidentiality of safety records and document shall be maintained as appropriate. This includes
  - i. First aid records
  - ii. Any medical records
  - iii. Violence reports
  - iv. Results of alcohol and drug tests
  - v. Disciplinary Records
  - vi. Any other documentation result deemed to be confidential by applicable legislation.

---

## 5. ADDITIONAL GUIDANCE

---

- a. Length of documentation retention varies by document type and jurisdiction. As minimum, applicable physical safety documentation will form part of the project file and will be archived with the project files, all safety documentation and records will be electronically archived.

## 6. REFERENCES AND SUPPORTING DOCUMENTS

### 6.1 References

- a. Applicable safety legislation

### 6.2 Supporting Documents

- a. Preventative Maintenance Policy and Standard
- b. Document Change Request Form
- c. Incident Report form
- d. Hazard observation form
- e. JHA form

## 7. DEFINITIONS

Documents	Documents are written materials that describe a policy, procedure, method or practice. Documents related to health and safety help formalize the health and safety management system, develop consistency and reduce reliance on the knowledge of individual people. Documents identify what needs to be done, who does, it, when they do it, what forms they use and who checks to make sure it is done. The level of documentation will vary depending on the size, activities and complexity of the business
Shall	A requirement. The introduction of exceptions to this Standard needs endorsement by senior management.
Should	A requirement. The introduction of exceptions to this Standard needs endorsement by senior management.

---

## 1. OBJECTIVE

---

To define the minimum requirements for hazard assessments, the analysis of risk and the identification of the controls required for the safe performance of work tasks.

---

## 2. SCOPE AND APPLICABILITY

---

This Standard shall be applied to all Company personnel, contractors and their subcontractors. Contractors may with management approval, utilize their own standards and procedures in so far as the requirements of their standards are at least equivalent to those of this standard.

---

## 3. RESPONSIBILITIES

---

All workers, management, and subcontractors collectively share health & safety responsibilities and must comply with this standard.

### Project Management

- Responsible for the application of, and compliance with this Standard at work locations where they have operational responsibilities.
- Review, monitor and evaluate employee and contractor compliance.
- Review and approve the JHA.

### Supervisory Personnel

- Ensure / assist in developing FLHA.
- Hold a daily meeting with crews to review FLHA for planned work.

### Safety Personnel

- Assist in developing the content for the JHA
- Participate as required in the daily FLHA content and meetings.
- Monitor and confirm compliance through periodic site visits.

### Employees

- Actively participate in the daily FLHA review
- Communicate any issues or concerns that may hinder comprehension.
- Report any conditions that may cause themselves or others to be in non-compliance with this standard.

### Contractors

- Ensure their personnel are informed of this standard.
- Monitor and enforce compliance with their personnel.
- Share their documentation as required.

---

## 4. REQUIREMENTS

---

### 4.1 General

- a. Appropriate Job Hazard Assessments / Field Level Risk Assessment shall be conducted for all operations, including routine, non-routine, and human factors where work is performed, including when:
  - i. work is conducted at temporary / mobile work sites
  - ii. workers are conducting activities at a work site not owned by the employer
  - iii. a new activity has been temporarily introduced at the work site
  - iv. before the job or task begins
  - v. repeated if changes are introduced

- b. All company personnel are required to report actual and potential hazards
- c. Initial project hazard assessments shall be initiated by the health and safety department following the perfect plan meeting and after the project management team has determined methodology.
- d. Project Manager will review and approve the JHA prior to the start of work.
- e. Hazard assessments shall be initiated:
  - i. proactively prior to commencement of tasks
  - ii. when operations, equipment, material(s), substance(s) or work-related processes are introduced or changed
  - iii. when a change to the safety management system may impact workplace operations or activities
- f. In addition, hazard assessments shall be reviewed, updated and re-approved under the following conditions:
  - i. when the phase of project changes
  - ii. when site-specific hazard assessments, inspections, or investigations identify a previously unrecognized hazard
  - iii. after an incident / investigation
  - iv. at pre-determined frequencies – for JHA minimum annually
  - v. when operations, equipment, material(s), substance(s) or work-related processes are introduced or changed
  - vi. when a change to the safety management system may impact workplace operations or activities
- g. The company shall develop a list of identified critical tasks and/or activities based on the risk rating system

#### 4.2 Involvement

- a. The Hazard assessment process, including the identification of hazards, quantification of risk and review of the required controls, must involve the appropriate competent workplace parties such as:
  - i. Workers
  - ii. Supervisors
  - iii. Maintenance
  - iv. Engineering
  - v. Suppliers
- b. A competent party is someone who has the knowledge, experience and skills required to conduct workplace inspections and identify hazards related to the workplace or the actual work being completed.
- c. Training course “Workplace Hazards and Controls” will be provided via HRDownloads (or equivalent) to all applicable parties to become competent.

#### 4.3 Job Hazard Analysis Process


- a. Job hazard assessments, which include the identification of hazards, analysis of risk and the identification of control measures, shall be completed using the company standard JHA form
- b. Field Level Hazard Assessments, shall be completed using the company standard FLHA form.
- c. Recognise Hazards
  - i. Identify all actual and potential hazards including those originating outside of the workplace that may impact safety within the workplace for which the company has control
- d. Analyse the Risk
  - i. Analyse the risk level associated with the hazard, Severity x Likelihood, using the company risk assessment matrix.

**Risk Assessment Matrix**

		Likelihood				
		Very unlikely to happen	Unlikely to happen	Possibly could happen	Likely to happen	Very likely to happen
Severity	Catastrophic e.g. Fatal	Medium	High	Critical	Critical	Critical
	Major e.g. Lost time or disabling	Low	Medium	High	Critical	Critical
	Moderate e.g. Medical treatment	Low	Medium	Medium	High	Critical
	Minor e.g. First aid	Very low	Low	Medium	Medium	High
	Superficial e.g. No treatment required	Very low	Very low	Low	Low	Medium

**e. Identify and Implement Controls**

- i. The Hierarchy of Controls shall always be consulted when determining the best method to control a hazard. The first consideration should be whether or not a hazard can be eliminated altogether before seeking other alternatives.

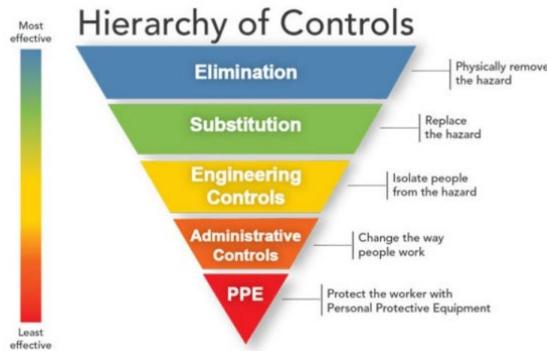

**f. Approvals**

- i. The PM or similar senior management shall sign the JHA form indicating approval / completeness of the hazard identification and the required controls identified on the form.
- ii. The onsite supervisor / foreman shall sign the FLHA form

**4.4 Communication and Availability**

- a. Workers affected by the hazards identified in the job hazard assessment shall be informed of the nature of the hazard, the methods to be used to control or eliminate those hazards and sign acknowledgement.
- b. All identified control measures shall be made readily available at the point of use, as required.

**5. ADDITIONAL GUIDANCE**

- a. Legal requirements, associated standards, manufacturer’s instructions and guidelines from the applicable jurisdiction should be taken into account when identifying both hazards and controls.
- b. Consider the design and layout of the work area, ergonomics, machinery and processes when completing a job hazard assessment

## 6. REFERENCES AND SUPPORTING DOCUMENTS

### 6.1 References

- PDI PPE standard
- Local legislation

### 6.2 Supporting Documents

- JHA form
- FLHA form
- Risk assessment model
- Critical task list
- Hierarchy of Controls
- Workplace Hazards and Controls Training - HRDownloads

## 7. DEFINITIONS

Control	Process, practices, systems, policies and tools that are designed to reduce safety risk.
Hazard	Potential for harm. In practical terms, a hazard often is associated with a condition or activity that, if left uncontrolled, can result in an injury or illness
Job hazard analysis (JHA)	A pro-active technique that focuses on job tasks, as a way to identify hazards, analyse risk and indicate all required controls necessary to safely perform a task.
Field level Hazard Assessment (FLHA)	A review of the planned work, the associated hazards and required control for tasks planned at the field level, prior to starting work
Risk evaluation	The process of evaluating a risk against given criteria to determine the significance of the risk.
Shall	A requirement. The introduction of exceptions to this Standard needs endorsement by senior management.
Should	A requirement. The introduction of exceptions to this Standard needs endorsement by senior management.

---

### 1. OBJECTIVE

---

To define the minimum requirements for Joint Health & Safety Committees (JHSC)

---

### 2. SCOPE AND APPLICABILITY

---

This Standard shall be applied to all Company personnel, contractors and their subcontractors. Contractors may with management approval, however, utilize their own standards and procedures in so far as the requirements of their standards are at least equivalent to those of this standard.

---

### 3. RESPONSIBILITIES

---

The implementation of this Standard is the responsibility of Company senior management.

Company's managers are responsible for the application of, and compliance with, this Standard at work locations where they have operational responsibilities.

Contractors are responsible for their personnel, and their subcontractor's personnel, compliance with this Standard and / or other standard as agreed per Section 2 above.

Supervisors are responsible for the day-to-day application of this Standard.

All company personnel have a responsibility to comply with this standard.

All personnel have a duty of care, to their work team and others in relation to the application and maintenance of this standard, for work they, their work team or others undertake.

---

### 4. REQUIREMENTS

---

#### 4.1 Workplaces that require a committee or representative

- a. Committees
  - i. Any workplace that regularly employs 20 or more workers;
  - ii. Construction projects expected to last three months or longer with 20 or more workers
  - iii. If a designated substance regulation applies to a workplace, you are required to have a JHSC
- b. Safety Representatives are required when 6-19 employees are at a work site

#### 4.2 Selection and appointment

- a. Worker members must be selected by the workers. In a unionized workplace, the worker members must be chosen by the trade union or union
- b. The employer or constructor chooses the remaining members from persons in the workplace who exercise managerial functions

#### 4.3 Composition of the committee

- a. At least half the committee members must be worker members, (specifically workers who do not exercise managerial functions) at the workplace.

#### 4.4 Training

- a. At least two members of the committee (one representing workers and one representing persons who exercise managerial functions) be certified
- b. In order to be certified, a person must complete the Parts 1 and 2 of mandatory training: Basic Certification and Workplace-Specific Hazard Training. Refresher training is required every three (3) years to maintain certification.

#### 4.5 Posting names and work locations

- a. The names and work locations of all committee members shall be visibly posted i.e. “safety board” and in the office at the work stations of committee members or on the safety bulletin boards.

#### 4.6 Roles and responsibilities

- a. The committee is an advisory body that helps to stimulate or raise awareness of health and safety issues in the workplace, recognizes and identifies workplace risks and develops recommendations for the employer to address these risks.
- b. The committee has various powers, including:
  - i. Identifying actual and potential hazards in the workplace
  - ii. Obtaining information from the employer relating to health and safety in the workplace
  - iii. Inspecting the workplace on a regular basis
  - iv. Being consulted about and having a member representing workers be present at the beginning of any health and safety-related testing in the workplace
  - v. Recommending health and safety improvements in the workplace.
  - vi. Employer to consult the committee or health and safety representative during the development of health and safety policies and programs, including training programs
  - vii. Employers are required to consult with the committees in assessments of likely worker exposures to designated substances in the workplace, and the committees are entitled to make recommendations in respect of said assessments.
  - viii. Other key functions are investigating when a worker is killed or critically injured and being present in the investigations following a work refusal
- c. Employers have a range of obligations in respect of joint health and safety committees including:
  - i. Assisting and cooperating with committee members in the carrying out of their functions
  - ii. Providing the committee with information relating to hazards in the workplace and any work practices and standards in similar industries
  - iii. Providing the committee with a copy of all orders or reports issued to the employer by a Ministry of Labour inspector, informing the committee of any work related incidents involving injury, death or occupational illness
  - iv. Consulting with the JHSC or health and safety representative on the development of health and safety programs and policies (including training programs)
  - v. Provide a joint health and safety committee member representing the workers with the opportunity to accompany a Ministry of Labour inspector on the physical inspection of the workplace

#### 4.7 Frequency of meetings

- a. Meet at a minimum of every 3 months

- b. Strive to meet on a more frequent basis, or as necessary due to workplace conditions and safety performance.

#### 4.8 Periodic Inspections

- a. Inspections of the workplace must be carried at least monthly
- b. Where it is not practicable to inspect the entire workplace monthly, the inspection may be of a portion, such that the entire workplace is inspected at least annually.
- c. Records of inspections shall be maintained

#### 4.9 Member Time

- a. A member of the committee is considered to be at work when performing specified activities relevant to his or her role and must be paid at either their regular rate or, where applicable (i.e., when duties take them beyond their usual hours of work), their premium rate of pay.

#### 4.10 Review, recommendations, corrective actions and implementation

- a. The committee shall maintain records for recommendations, corrective actions required and corrective actions taken on the JHSC action log.
- b. Recommendations can results from workplace inspection, observation, review of training programs, worker requests or comments.
- c. An employer who receives written recommendations from the committee must provide a written response to the committee within 21 calendar days.
- d. If the recommendations are accepted, a timetable for action must be outlined and provided to the committee.
- e. If an employer decides against acting on all or some of the committee's recommendations, reasons must be given in writing.

---

### 5. ADDITIONAL GUIDANCE

---

- a. [Guide for health and safety committees and representatives](#), Ontario Ministry of Labour

---

### 6. REFERENCES AND SUPPORTING DOCUMENTS

---

#### 6.1 References

- a. Occupational Health and Safety Act, R.S.O. 1990, c. O.1

#### 6.2 Supporting Documents

- a. Terms of reference
- b. Meeting minutes form
- c. JHSC Action log

---

**7. DEFINITIONS**

---

Recommended	To be considered as part of the documented, local risk assessment process.
Shall	A requirement. The introduction of exceptions to this Standard needs endorsement by senior management.
Should	A requirement. The introduction of exceptions to this Standard needs endorsement by senior management.

---

## 1. OBJECTIVE

---

To define the minimum requirements for procurement and selection of contractors that work for the company.

---

## 2. SCOPE AND APPLICABILITY

---

This Standard shall be applied to all Company personnel, contractors and their subcontractors. Contractors may with management approval, however, utilize their own standards and procedures in so far as the requirements of their standards are at least equivalent to those of this standard.

---

## 3. RESPONSIBILITIES

---

The implementation of this Standard is the responsibility of Company senior management. All workers, management, contractor/subcontractor, constructor, owner and employer collectively share health & safety responsibilities and must comply with this standard.

### Procurement Personnel

- Will ensure that contractors submit the required prequalification documentation and review their content against applicable standards

### Safety Personnel

- Assist the procurement department in evaluating the safety components of the prequalification documentation such i.e. safety program elements.
- Monitoring and evaluating contractor safety performance, document consequences
- Communicate unsafe behaviors / non-compliance with applicable legislation and build accountabilities.

### Project Teams

- Including PMs PC's, Superintendents and Foreman will ensure that any contracted work performed under their authority or control conforms to the applicable requirements of this policy and program.
- In conjunction with Contractor Management, conduct and/or ensure accident/incident investigations are completed, documented and timely corrective actions are taken.
- Communicate changes affecting health and safety with all affected workplace parties including contractors.

### Legal Department

- Provide support as necessary for ensuring that any contracted work conforms to all relevant laws and regulations.
- Ensure that any contracted work minimizes legal risk for Priestly Demolition.

### Senior Management

- Responsible for the application of, and compliance with, this Standard at work locations where they have operational responsibilities.
- Review, monitor and evaluate contractor safety performance, build accountabilities (performance rating system, contract incentives)
- Document consequences and communicate unsafe behaviours / non-compliance with OHSA
- Keep copies of all completed forms and relevant documentation pertaining to the Contractor Management Program for reference.

### Contractor

- Acceptance/sign-off documentation by contractor to abide by Priestly Demolition requirements and abide by the Contractors approved health and safety programs and/or rules and regulations at the worksite.
- Contractor must communicate relevant health and safety information to Priestly.

- Ensure that any contracted work performed under their authority or control conforms to the requirements of the Contractor Management Program and all relevant legislated obligations
- Responsible for their personnel, and their subcontractor's personnel, compliance with this Standard, communication and or other, standard as agreed above.
- In conjunction with Priestly Demolition ensure that health & safety risk assessments are conducted, relevant information shared with workers, training provided and corrective actions are taken to protect the health & safety of all workers/employees
- Notify both Priestly Demolition and the appropriate authorities/persons of any accidents/incidents as required.
- In conjunction with the project manager or delegate, conduct accident/incident investigation as required.

---

## 4. REQUIREMENTS

---

### 4.1 General

- a. All contractors are required to complete hazard assessments as per the Priestly Hazard Assessment Analysis and Control policy and standard.
  - i. Contractors may be able to use their own hazard assessment process, provided it is equal to or exceeds the company's standard.
- b. The company shall take the lead on the coordination of their site specific safety requirements on multi-employer workplaces.
- c. Changes affecting the health and safety of work must be communicated with all affected workplace parties.

### 4.2 Contractor Tiers

- a. The company uses a three-tier system to evaluate vendors and contractors.
  - i. Level 1 - Off site contractors / anyone not providing services onsite
  - ii. Level 2 - Short duration onsite / Low risk work
  - iii. Level 3 - Long term onsite / High risk work
  - iv. Level 4 – Trucking companies

#### 4.2.1.2 **All Contractors (Level 1,2,3 & 4)**

- a. Shall provide:
  - i. Proof of valid workers compensation coverage
    - This requirement takes many forms depending on the jurisdiction. Commonly called a clearance letter or certificate
  - ii. Proof of insurance (insurance certificates naming PDI / VPCL)

#### 4.2.1.3 **Level 2, 3, & 4 Contractors**

- a. Applicable contractors shall:
  - i. Provide an up-to-date performance rating from the applicable worker compensation insurance provider.
    - This will vary by jurisdiction but can include an EMR, Premium rate statement, Cad 7 etc.
  - ii. Submit a written safety policy
    - Signed by senior management
    - Updated in the last 12 months
  - iii. Demonstrate the ability and competency to be able to:

- Assess / analyze and control hazards arising from their work that may impact the organizations workers
- Assess / analyze and control hazards arising from their work that may impact the contractors workers

### 4.2.1.4 Level 3 Contractors

- a. In addition to the above. Level 3 contractors shall have a fully functioning safety program. Minimum safety program elements include:
  - i. Safety responsibilities of all workplace parties
  - ii. Hazard identification, Risk assessment and Controls
  - iii. Safety Inspections and Monitoring
  - iv. Safe Work Procedures and practices that cover the work to be performed
  - v. Safety Communications
  - vi. Incident Reporting and Investigation
  - vii. Emergency response
  - viii. Return to work processes
- b. Note: A valid provincial Certificate of Recognition, ISO certification or similar audited 3<sup>rd</sup> party certification will be considered as meeting the program criteria
- c. Applicable contractors shall supply OSHA compliant total recordable incident frequency (TRIF) for the previous 3 calendar years for comparison to acceptable rates.

### 4.2.1.5 Level 4 Contractors

- a. In addition, level 4 contractors shall provide:
  - Proof of insurance (insurance certificates naming PDI / VPCL)
  - A Level one CVOR (or home province safety rating)

## 4.3 Contractor Management Program

### 4.3.1 Stage 1 – Contractor Prequalification Evaluation Form

All company contractors and subcontractors will be evaluated using the Pre-qualification Form to determine ability and competency of the contractor to assess/analysis and control hazards arising from their work or the effect of their work on other parties.

- a. To determine ability:
  - i. A specific evaluation of the hazard assessment and control processes will be made to ensure compliance with our standards
- b. To determine competency
  - i. Recordable incident frequency (TRIF) will be compared against industry standards. If rate is above industry average an explanation will be required explaining the cause of the poor performance and corrective actions taken.  
Or
  - ii. Workers compensation will be analyzed to determine if the contractor rate is within industry average / discount. If it is not within industry average / discount, an explanation will be required by the contractor explaining the cause and corrective action taken

# Procurement and Contractor Management

## Standard | PDI HSE – S004



- c. Safety program compliance can be determined by:
  - i. obtaining proof of a valid provincial Certificate of Recognition, ISO certification or similar audited 3rd party certification or
  - ii. review of the safety manual / program documents to assess compliance.
- d. If a contractor is unable to meet subsection ability or competency requirements, they may be used if they provide written acceptance and agree to comply with the company's process while work is being performed on site.

### 4.3.2 Stage 2 – Performance Monitoring

- a. Once approved, Procurement Team will either set up or the vendor in Viewpoint and notify the Project team requester or send communication to Accounts Payable and copy Project Team requester to confirm that the vendor may be set up in Viewpoint.
- b. If the vendor is not approved due to H&S reasons, then Procurement Team will notify the Project Team requester and assist to find an alternate vendor
- c. During the contract, Priestly Demolition will monitor the contractor's performance on a regular basis, documenting issues and concerns. Health and safety performance and worksite monitoring may consist of any of the following; health & safety audit, workplace inspection or incident/accident investigation. The Priestly Demolition health and safety team will document their contractors' safety observations using the contractors' management section of the "Safety Team Site Visit Report" form.
- d. The occupational health and safety performance and practices of a contractor, subcontractor, constructor or any related work; will be monitored in order to confirm that the contractor/subcontractor or constructor has complied with health & safety policies and best practices and complied with the Contractor Management Program requirements. Priestly will conduct and document the monitoring activities.
- e. Contractor is responsible for completing an appropriate investigation for all incidents that occur on site. This will be reviewed and form the basis of the Priestly Demolition incident and near miss reporting. Copies of all Incident Reporting Forms must be retained by project manager on Kissflow and will be accessed by Human Resources/Health & Safety Department and senior management based on need.
- f. Priestly Demolition retains the right to stop the contractor/constructor work without penalty to Priestly Demolition if the contractor/constructor does not comply with the Occupational Health and Safety Act and Regulations, all applicable and contractor/constructor company policies/procedures, Industry best practices/standards, or creates an unacceptable health and safety condition.

### 4.3.3 Stage 3 – Post Contract Performance Evaluation and Continuous Improvement

Priestly demolition uses the Vendor Feedback form to provide timely feedback on the performance of our subcontractors as required.

Upon completion, all projects are reviewed for performance of all aspects using the "Project Close out Review Form". This form contains specific safety related data, about the contractors safety performance during the project.

- a. Should a Contractor be evaluated conducting poor performance, Priestly may choose to review poor performance with the Contractor and request a corrective action plan or the Contractor may be disqualified from bidding on future work for Priestly Demolition.



- b. Priestly Demolition reserves the right to:
- Disqualify a contractor based on past performance
  - Obtain documentation and evidence to demonstrate that the contractor/constructor complies with the Contractor Management Program requirements

#### 4.4 Records

Procurement maintains a Prequalified Vendor List within the Master Vendor List. All prequalification forms are on the shared drive under the following file path: W:\Procurement\H&S Prequalified Vendors

Procurement maintains a “Do Not Use” list within the Master Vendor List that all employees can reference

### 5. ADDITIONAL GUIDANCE

Any variance from this standard will require written acceptance of the change from a member of senior management team.

### 6. REFERENCES AND SUPPORTING DOCUMENTS

#### 6.1 References

- Applicable critical incident reporting as per local legislation

#### 6.2 Supporting Documents

- Near Miss and Incident Report Form
- Pre-Qualification Form
- Vendor Feedback Form
- Safety Team Site Visit Form
- Project Close Out Form

### 7. DEFINITIONS

Level 1 Contractor	Contractors who do not come to our sites. Examples include off site consultants, caterers etc.
Level 2 Contractor	Short duration onsite while performing low risk work. Examples include deliveries, pick-ups, observation visits etc.
Level 3 Contractor	Contractors on site for an extended duration or those performing high risk activities such as construction work.
Level 4 Contractor	Trucking companies that are directly contracted to haul goods and materials. Excludes delivery services i.e. Purolator, Amazon etc.

---

## **1. OBJECTIVE**

---

To define the minimum requirements for the company rules.

---

## **2. SCOPE AND APPLICABILITY**

---

This Standard shall be applied to all Company personnel, contractors and their subcontractors. Contractors may with management approval, however, utilize their own standards and procedures in so far as the requirements of their standards are at least equivalent to those of this standard.

---

## **3. RESPONSIBILITIES**

---

All workers, management, contractor/subcontractor, constructor, owner and employer collectively share health & safety responsibilities and must comply with this standard.

### **Management**

- Responsible for the application of, and compliance with this Standard at work locations where they have operational responsibilities.
- Review, monitor and evaluate employee and contractor compliance.
- Document and report unsafe behaviours / non-compliance using the company online system.

### **People Success**

- Keep copies of all completed forms and relevant documentation pertaining to employee records and the onboarding process
- Lead the disciplinary process once an infraction has occurred.

### **Safety Personnel**

- Assist in developing the content for the safety orientation.
- Facilitate the safety portion of the orientation where practicable. If not, ensure that a suitable person presents the materials.

### **Employees**

- Communicate any issues or concerns that may hinder comprehension.
- Abide by this standard.
- Report any conditions that may cause themselves or others to be in non-compliance with this standard.

### **Contractors**

- Ensure their personnel are informed of this standard. Contractors may use their own standard if it meets or exceeds the requirements in this document.
  - Monitor and enforce compliance with their personnel.
- 

## **4. REQUIREMENTS**

---

### **4.1 General**

The following rules apply to all personnel and must be adhered to.

These rules will also be posted at all active work locations.

These rules will be clearly explained in a manner that the employee understand with all employees during the orientation process. As confirmation of understanding, all employees will be requested to review and sign the employee acknowledgement form, acknowledging receipt and understanding of these rules. If the individual indicates that they do not fully understand, further actions to ensure understanding will be made. These efforts can include, review of the content, private training sessions or interpreters based on the specific need of the individual(s).

## 4.2 Site Specific Safety Rules

Our work sites contain many different hazards and workers will be informed of all applicable hazards on a daily basis, prior to starting work. These rules have been identified as the critical site safety rules and all PDI employees are expected to follow them at their specific project site.

## 4.3 Progressive Discipline

The company rules are consistently applied and enforced across all levels of the organization, in accordance with the Progressive Disciplinary Procedure.

Violations of either the critical site safety rules or the company rules will result in appropriate disciplinary action. All disciplinary action will be in accordance with the PDI People's Performance Policy - PDI HR – 016 People Performance and standard 1. This includes all documentation and record keeping required.

# Company Safety Rules

It is expected that all company employees will follow the company rules as defined below.

## Be Safe

- You have the right to refuse work you feel is unsafe at any time.
- If you see something, say something. Any hazard, incident, accident, spill, or near miss must be reported to your supervisor immediately.
- Wear and use appropriate PPE at all times.

## Be Prepared

- Plan the work and work the plan.
- Be aware of the location of fire extinguishers, first aid kits, emergency exits, and the muster point.
- Have all of the proper equipment to do the work.
- Follow the company policies, procedures, and programs.
- Know the hazards and risks of each job.

## Be Engaged

- Be Aware- pay attention to what is happening around you at all times.
- Focus on the task at hand, do not be distracted.
- Ask questions any time you are unsure.
- Come to work free from the influence of intoxicants, narcotics, or alcohol.

## Be Respectful

- Priestly is dedicated to an environment free from harassment – speak to and treat colleagues, clients, vendors, and visitors with courtesy.
- Cooperate with other team members and trades.
- Help each other out.
- Be reliable – Arrive for work on time, don't leave early, and meet deadlines.

### Consequences of Rule Breaking

Failure to comply with the Company Safety Rules will result in the application of our People Performance Policy.

# Critical Site Safety Rules

**Job Hazard Assessments**

- Identify hazards.
- Confirm hazards are controlled.
- Stop and reassess if conditions change.

**Working at Heights**

- Inspect all fall protection equipment before use.
- Be trained on the equipment use.
- If exposed to a fall hazard, wear fall protection and tie off to an approved designated anchor point.

**Fit For Duty**

- Be in physical, physiological, and psychological condition to perform your tasks safely.

**Personal Protective Equipment**

- Properly use, maintain and store PPE.
- Minimum PPE for site is CSA approved boots, hard hats, safety glasses and high visibility clothing while working near heavy equipment.

**Heavy Equipment**

- Perform pre-work equipment checks.
- Avoid blind spots.
- Maintain constant communication.

**Energy Isolation**

- Identify all energy sources.
- Confirm zero energy prior to starting work by confirming air gaps are in place or by using the lock out / tag out procedure.

**Consequences of Rule Breaking**

All incidents are to be reported and will be investigated.  
Failure to comply with any Critical Site Safety Rule will result in the application of our People Performance Policy.

## 5. DEFINITIONS

Recommended	To be considered as part of the documented, local risk assessment process.
Shall	A requirement. The introduction of exceptions to this Standard needs endorsement by senior management.
Should	A requirement. The introduction of exceptions to this Standard needs endorsement by senior management.

# Personal Protective Equipment

## Standard | PDI HSE - S006



---

### 1. OBJECTIVE

---

To define the minimum requirements for the selection, use and maintenance of Personal Protective Equipment (PPE)

---

### 2. SCOPE AND APPLICABILITY

---

This Standard shall be applied to all Company personnel, contractors and their subcontractors. Contractors may with management approval, however, utilize their own standards and procedures in so far as the requirements of their standards are at least equivalent to those of this standard.

---

### 3. RESPONSIBILITIES

---

The implementation of this Standard is the responsibility of Company senior management.

Company's managers are responsible for the application of, and compliance with, this Standard at work locations where they have operational responsibilities.

Contractors are responsible for their personnel, and their subcontractor's personnel, compliance with this Standard and / or other standard as agreed per Section 2 above.

Supervisors are responsible for the day-to-day application of this Standard.

All company personnel have a responsibility to comply with this standard.

All personnel have a duty of care, to their work team and others in relation to the application and maintenance of this standard, for work they, their work team or others undertake.

---

### 4. REQUIREMENTS

---

#### 4.1 Minimum requirements

- a. The minimum requirements for PPE on any project site are:
  - i. Hard hat – CSA Z94.1 Class 1 Type E
  - ii. Safety footwear – CSA standard Z195 (Green triangle - Sole puncture protection with a Grade 1 protective toe)
  - iii. Safety glasses (CSA Z94.3)
  - iv. Long pants
  - v. Shirt with sleeves (t-shirts acceptable)
- b. Workers shall be trained on the selection, use and care of PPE, as appropriate.
- c. All management, supervisors, workers, subcontractors and suppliers shall use required PPE
- d. All PPE shall be inspected and maintained in accordance with manufactures and legislative requirements.
- e. All PPE shall be visually inspected (and results recorded as stated in the specific PPE requirements below) on a daily basis by the user prior to starting work to ensure protection factors are maintained. Any defective or compromised PPE must be reported, taken out of service and replaced as appropriate.
- f. Appropriate PPE shall be provided and / or made available to workers as required for their specific activities.
- g. Activities requiring PPE shall be documented using appropriate forms.

#### 4.2 General PPE Selection Guidelines

- a. Personal protective clothing and equipment that is provided, worn or used shall be a proper fit having regard to all relevant factors including body types.
- b. PPE requirements for all activities can be found on the applicable Safe Work Practice and site-specific Job Hazard Assessment(s).
- c. The selection of PPE on a site-specific basis, should take into account the following:

# Personal Protective Equipment

## Standard | PDI HSE - S006



- i. Review of the applicable SDS' to determine the specific hazards and recommended control measures of onsite controlled substances
- ii. Review of any applicable hazard assessments i.e. JSA/JHA, CARS etc.
- iii. Review of applicable legislation
- iv. Review of applicable work practices and procedures for required PPE

### 4.3 Head Protection

- a. A worker exposed to hazards to their head shall wear head protection appropriate to the circumstances.
- b. Types of hard hats
  - i. Z94.1-05: Class E, Type 1
  - ii. Z94.1-05: Class E, Type 2 (Note: CSA Type 2 is recommended for construction work because it provides extra protection against side impact.)
- c. Use and care
  - i. Always consult the manufacturer's instructions for use and care instructions of your hard hat.
  - ii. Inspect the shell, suspension, and liner every day before you use it.
  - iii. Look for cracks, dents, cuts, or gouges.
  - iv. If a hard hat is struck by an object, do not keep using it.
  - v. Don't store your hard hat in direct sunlight—it will age quicker and can become brittle.
  - vi. Clean the shell, suspension, and liner regularly with mild soap and water.
  - vii. Never alter your hard hat by painting it, making holes in it, etc.
  - viii. Don't carry things inside your hard hat.
  - ix. Check the service life of your hard hat by contacting the manufacturer or reading the manufacturer's instructions.

### 4.4 Foot Protection

- a. A worker exposed to the hazard of foot injury shall wear foot protection appropriate in the circumstances.
- b. When worn properly, a CSA-certified Grade 1 work boot meets the requirements of the regulation.
  - i. Grade 1 offers the highest protection and is the only one allowed in construction. In a Grade 1 boot, a steel toe protects against falling objects while a steel insole prevents punctures to the bottom of the foot.
  - ii. A green triangular patch containing the CSA logo on the outside of the boot
  - iii. A green label indicating Grade 1 protection on the inside of the boot
  - iv. Grade 1 work boots are also available with metatarsal and dielectric protection
- c. Use and care
  - i. Clean your work boots regularly and check them for damage and wear and tear daily.
  - ii. Defective or worn-out footwear will no longer protect your feet properly and must be replaced.

### 4.5 Hearing Protection

- a. For hearing protection consider the level of noise that needs to be filtered out - and what level needs to be kept in.
- b. Normal conversation is about 60 dB, and sounds of 85 dB and higher are harmful, depending on the length of exposure.
- c. Both earplugs and earmuffs offer hearing protection
- d. Visually inspect all hearing protection prior to use for damage.
- e. Combining the two levels of protection will provide additional protection.
  - i. The Noise Reduction Rating or (NRR) for earplugs is between 22 and 33 dB (decibels) while the NRR for earmuffs is between 20 and 30 dB A basic formula for figuring out how much hearing protection your device offers is as follows:  $[(\text{NRR in dB}) - 7] / 2 = \text{sound level reduction}$ .

### 4.6 Eye & Face Protection

- a. Where a worker is exposed to flying objects, fragments, or particles safety glasses with side shields or goggles must be worn.

# Personal Protective Equipment

## Standard | PDI HSE - S006



- b. Visually inspect all eye and face protection prior to use for damage.
- c. Secondary protective devices such as face shields are required in conjunction with primary protective devices during severe exposure to impact hazards.
  - i. Safety Glasses: Primary protectors intended to shield the eyes from a variety of impact hazards
  - ii. Safety Goggles: Primary protectors intended to shield the eyes against flying fragments, objects, large chips, and particles.
  - iii. Face Shields: Secondary protectors intended to protect the entire face against exposure to impact hazards.

### 4.7 Hand Protection

- a. Gloves are often relied upon to prevent cuts, abrasions, burns, and skin contact with chemicals that are capable of causing local or systemic effects following dermal exposure.
- b. No glove can provide protection against all potential hand hazards, and commonly available glove materials provide only limited protection against many chemicals. Therefore, it is important to select the most appropriate glove for a particular application and to determine how long it can be worn, and whether it can be reused.
- c. It is important to know the performance characteristics of gloves relative to the specific hazard anticipated, e.g., chemical hazards, cut hazards, flame hazards, etc.
- d. Visually inspect all hand protection prior to use for damage.
- e. Determine the degree of dexterity required, the duration, frequency, and degree of exposure of the hazard, and the physical stresses that will be applied.
- f. With respect to selection of gloves for protection against chemical hazards:
  - i. The toxic properties of the chemical(s) must be determined; in particular, the ability of the chemical to cause local effects on the skin and/or to pass through the skin and cause systemic effects.
  - ii. Generally, any "chemical resistant" glove can be used for dry powders.
  - iii. For mixtures and formulated products (unless specific test data are available), a glove should be selected on the basis of the chemical component with the shortest breakthrough time, since it is possible for solvents to carry active ingredients through polymeric materials; and,
  - iv. Employees must be able to remove the gloves in such a manner as to prevent skin contamination

### 4.8 Specialized PPE

- a. Selecting the right fall arrest equipment is of vital importance when working from an elevated position in order to prevent serious injury or even death.
- b. There are three key components of a Personal Fall Arrest System (PFAS), which must be in place and properly used to provide maximum worker protection – a harness, a connection, and an anchor/anchorage point.
- c. When selecting the right harness, wearer's must choose a harness that is designed for a specific application.
  - i. Each harness is engineered with a series of unique components, including different types of webbing, side, rear and frontal D-rings and lanyard rings, and provides a safety solution that closely matches the work environment
  - ii. It is also important to ensure that the harness fits well, and that the shoulder, waist and legs straps are adjusted.
- d. The connection component of a fall arrest system acts to reduce the force of a sustained fall, when used in conjunction with a full body harness and suitable anchorage. Workers should always check the recommended connection component.
  - i. There are a number of connector choices available to workers including lanyards and fall arrestors, and when choosing the correct connection.
  - ii. It is important to consider the fall clearance distance, as well as the work application.
- e. When attached to a suitable anchorage point, the anchorage connector completes the workers fall arrest system.
  - i. The best harness with the best lanyard cannot arrest a fall if an unsuitable anchorage is selected.
  - ii. An anchorage must support 15kN for a single tie-off for one individual, and in all cases, the anchorage point selected must allow for minimum free fall clearances.
  - iii. An anchorage should also be positioned directly overhead whenever possible to avoid the pendulum effect which can cause a worker to swing as they fall, creating the potential for injury.

# Personal Protective Equipment

## Standard | PDI HSE - S006



- iv. An anchorage should be selected based on how a rescue would be performed
- f. Fall protection equipment maintenance and inspection is an essential part of safety when working at height. Follow these simple steps as part of the routine to ensure that harnesses and lanyards offer optimal protection:
  - i. All harnesses and lanyards must be inspected before use and documented using the “Daily Fall Protection Equipment Inspection Checklist”. Users need to check and ensure that all labels, harness serial numbers, inspection and withdrawal dates are legible. It is also important to check that the safety standard certification mark is visible.
  - ii. Inspect the harness and lanyard webbing for any cuts, tears, holes, excessive stretching or abrasion damage. Depending on the type of industry, harnesses can be exposed to heat, corrosives and even hardware, which can compromise the integrity of the webbing.
  - iii. Examine all the harness and lanyard hardware and check for corrosion, deformation or excessive movement. Buckle adjusters, D-rings, and Snap Hooks should be free from dirt and damage. If any of the hardware exhibits excessive wear and tear – replace it immediately.
  - iv. Ropes should be checked for cuts, abrasion or fraying, as well as cracked or broken thimbles. If damage to the rope is visible, remove the rope from service and document.
  - v. Check all the sewing on the harness and lanyard to ensure that there are no broken, cut or worn threads. It is also important to look out for any damaged or weakened threads as a result of damage through exposure or deterioration. If there are any visible unauthorized repairs, remove the equipment from service immediately
- g. Basic care of the safety equipment will not only prolong its durable life but will also contribute towards the performance of its vital safety functions.
  - i. The most effective way of cleaning a harness or lanyard is to first wipe the surface with a damp sponge, before working up a lather using a mild solution of water and dishwashing liquid. Rinse the equipment in lukewarm water and hang freely to dry away from excessive heat.
  - ii. To avoid unnecessary damage and deterioration to harness and lanyards as a result of exposure to heat, corrosive or sharp edges, as well as UV or other factors

### 4.9 Respirators

- a. Respirators should not be the first choice for respiratory protection in workplaces.
  - i. Respiratory hazards should first be attempted to be controlled using ventilation. Where ventilation is not practicable, workers potentially exposed to airborne contaminants must wear respiratory protective device
- b. Employees required to use respiratory protective equipment shall be trained on the proper selection, care and use.
- c. Respirator Selection
  - i. In order to select the proper respirator for a particular job, it is necessary to know and understand:
    - o The characteristics of the contaminant(s) the anticipated exposure conditions
    - o The performance limitations of the equipment
    - o Any legislation that applies
    - o Facial hair and deep facial scars can interfere with the seal between respirator and face.
  - ii. Respirators should only be selected by someone who understands all of these factors.
  - iii. Before using or handling a hazardous product, consult the safety data sheet (SDS) for the type of respiratory protection required.
  - iv. Under the Workplace Hazardous Materials Information System (WHMIS), an SDS must be available for every hazardous product.
- d. The two main types are air-purifying respirators (APRs) and supplied-air respirators (SARs).
- e. Supplied-air respirators (SARs) supply clean air from a compressed air tank or through an airline.
  - i. This air is not from the workroom area.
  - ii. The air supplied in tanks or from compressors must meet certain standards for purity and moisture content (e.g., CSA Standard Z180.1): Compressed Breathing Air and Systems).
- f. Supplied-air respirators may have either tight-fitting or loose-fitting respiratory inlets.

# Personal Protective Equipment

## Standard | PDI HSE - S006



- i. Respirators with tight-fitting respiratory inlets have half or full-face pieces. Types with loose-fitting respiratory inlets can be hoods or helmets that cover the head and neck, or loose-fitting face pieces with rubber or fabric side shields. These are supplied with air through airlines.
- ii. Examples of these classes of respirators include:
  - Self-contained breathing apparatus (SCBA)
  - Airline supplied-air respirators
  - Protective suits that totally encapsulate the wearer's body and incorporate a life-support system
- g. There are some combinations of airline respirators and SCBAs that allow workers to work for extended periods in oxygen-deficient areas or where there are airborne toxic contaminants.
  - i. The auxiliary or backup SCBA source allows the worker to escape with an emergency source of air if the airline source fails.
- h. Air-purifying respirators can remove contaminants in the air that you breathe by filtering out particulates (e.g., dusts, metal fumes, mists, etc.). Some APRs purify air by adsorbing gases or vapours on a sorbent (adsorbing material) in a cartridge or canister. They are tight fitting and are available in several forms and function types:
  - i. Mouth bit respirator (fits in the mouth and comes with a nose clip to hold nostrils closed - for escape purposes only)
  - ii. Quarter-mask (covering the nose and mouth)
  - iii. Half-face mask (covering the face from the nose to below the chin)
  - iv. Full face piece (covering the face from above the eyes to below the chin) Respirators with a full-face piece also protect the eyes from exposure to irritating chemicals.
  - v. Particulate respirators (also called dust, fume, and mist respirators or masks)
  - vi. Chemical cartridge respirators that can have a combination of chemical cartridges, along with a dust pre-filter. This combination provides protection against different kinds of contaminants in the air
  - vii. Gas masks (contain more adsorbent than cartridge-type respirators and can provide a higher level of protection than chemical cartridge respirators)
  - viii. Powered air-purifying respirators (PAPRs)
- i. Since filters capture particles, caution must be exercised to always check that these filters are not clogged as it makes it harder for air to pass through. Cartridges can also become "full" or saturated. It will stop working and "breakthrough" will occur – this term means that the gases or vapours will leak through the cartridge.
- j. Both cartridges and filters must be replaced on a regular basis by using the manufacturer's recommendations (usually determined by using warning properties or end-of-service indicators).
- k. There are different classes of particulate filters, depending on the particulate material. They are also classified based on levels of oil resistance and filter efficiency. Oil can break down certain types of filters, which means it is important to know the materials you are working with at all times and always select the right cartridge for your respirator. The main categories are:
  - i. N series (Not resistant to oil) - May be used in any atmosphere where there is no oil particulate.
  - ii. R series (Resistant to oil) - May be used in any atmosphere where there is no oil particulate, or up to one shift where there is oil particulate present. "One shift" means eight hours of continuous or intermittent use.
  - iii. P series (Oil-Proof) - May be used in any atmosphere, including those with oil particulates, for more than one shift. If the filter is used in atmospheres with oil particulates, contact the manufacturer to find out the service life of the filter.
- l. Respirator Use & Maintenance
  - o Like any equipment, respirators need maintenance.
  - o Filters should be changed as follows:
    - o Dust/mist/fume filters should be changed when there is noticeable resistance to normal breathing.
    - o Chemical cartridges should be changed when indicated by the end-of-service-life indicator or according to the change-out schedule.
    - o Any filter should be changed at the interval specified by the manufacturer or when damaged in any way.
    - o Inhalation and exhalation valves should be checked before the respirator is used.
    - o Daily visual inspection must be completed prior to use.

# Personal Protective Equipment

## Standard | PDI HSE - S006



- Damaged face piece, straps, filters, valves, or other parts should be replaced with "original equipment" parts.
- Face pieces should be washed in accordance with the manufacturer's instructions.
- Respirators should be assigned to the exclusive use of individual workers.
- Where a respirator must be assigned to more than one worker, it should be disinfected after each use (check with the manufacturer regarding acceptable sanitizers/disinfectants).
- Check all supply hoses, valves, and regulators on supplied-air respirators as specified by the manufacturer.
- SCBA units and high-pressure cylinders of compressed breathing air should be used and maintained in accordance with current CSA Standards Z94.4: Selection, Care and Use of Respirators and Z180.1: Compressed Breathing Air and Systems.
- Compressors and filtration systems used with supplied-air respirators must be maintained in accordance with the manufacturers' recommendations.
- Consult manufacturer for information on respirator cartridge change-out.
- Store respirators in a location away from dust, ozone, sun, heat, extreme cold, excessive moisture, vermin, damaging chemicals, oils, and grease.
- Ensure the rubber face piece is not deformed.

### 4.10 Skin Protection

- a. Workers exposed to skin hazards must wear the appropriate protective equipment.
- b. Hazards to the skin may be addressed in a number of ways. The guiding principle being, is the protection adequate to the hazard. Examples include
  - i. Gloves (see section 4.7) may be appropriate for hazards to the skin / hands.
  - ii. When handling caustic or corrosive materials an apron may be required for further protection.
  - iii. Leggings are appropriate leg protection against welding sparks.
  - iv. Workers using chain saws will need leg protection resistant to chain saw cuts.
  - v. Shirts with sleeves, and/or sunscreen may be appropriate for the reduction of UV sunlight exposure.

---

## 5. ADDITIONAL GUIDANCE

- a. Ontario Regulation 381/15: NOISE

---

## 6. REFERENCES AND SUPPORTING DOCUMENTS

### 6.1 References

- a. CSA Standard Z94.2 Hearing Protection Devices – Performance, selection, care and use
- b. CSA Standard Z195 Protective Footwear
- c. CSA Standards Z94.4 Selection, Care and Use of Respirators
- d. CSA Standard Z180.1 Compressed Breathing Air and Systems
- e. CSA Standard Z94.2 Hearing Protection Devices
- f. CSA Standard Z259.12 Fall Protection
- g. Daily fall protection equipment inspection checklist
- h. Respirator fit testing record / inspection form

# Personal Protective Equipment

## Standard | PDI HSE - S006



### 7. DEFINITIONS

Recommended	To be considered as part of the documented, local risk assessment process.
Shall	A requirement. The introduction of exceptions to this Standard needs endorsement by senior management.
Should	A requirement. The introduction of exceptions to this Standard needs endorsement by senior management.

# Preventative Maintenance

## Standard | PDI HSE - S007



---

### 1. OBJECTIVE

---

To define the minimum requirements for the Preventative Maintenance of equipment, tools, vehicles, and facilities, ensuring they are kept in safe working order.

---

### 2. SCOPE AND APPLICABILITY

---

This Standard shall be applied to all Company personnel, contractors, and their subcontractors. Contractors may, utilize their own standards and procedures in so far as the requirements of their standards are at least equivalent to those of this standard.

---

### 3. RESPONSIBILITIES

---

The implementation of this Standard is the responsibility of Company senior management.

Company's managers are responsible for the application of, and compliance with, this Standard at work locations where they have operational responsibilities. This includes the reporting of equipment condition.

The fleet operations department is responsible for the overall management of this standard.

Contractors are responsible for their personnel, and their subcontractor's personnel, compliance with this Standard and / or other standard as agreed per Section 2 above.

Supervisors are responsible for the day-to-day application of this Standard including actioning any items that require maintenance and removing non-compliant equipment out of service.

Operators of heavy equipment shall complete daily inspections and reporting any noncompliance items.

All company personnel have a responsibility to comply with this standard including monitoring and reporting any equipment that is not in working order or is in noncompliance with this standard.

All personnel have a duty of care to their work team and others in relation to the application and maintenance of this standard, for work they, their work team or others undertake.

---

### 4. REQUIREMENTS

---

#### 4.1 Inventory

- a. There shall be an inventory list of all items to be maintained
- b. The inventory of all equipment shall be kept in Bid to Win
- c. The inventory list should include equipment regardless of its status; owned, leased, or rented

#### 4.2 Schedules

- a. A schedule must be used to track all maintenance and services performed
  - i) Preventative Maintenance services following manufacturer's recommendations
  - ii) Emergency Maintenance
  - iii) Third party Maintenance
- b. A description of the preventative maintenance performed shall be available including the following information
  - i) The mechanic or vender
  - ii) Service date
  - iii) Type of maintenance
- c. Bid to Win should be utilized for scheduling all maintenance and tracking preventative maintenance
- d. Once the scheduled maintenance has been performed, it should be kept in the equipment history

# Preventative Maintenance

## Standard | PDI HSE - S007



### 4.3 Guidelines

- a. Preventative Maintenance must meet the manufacturers guidelines and legislated requirements
- b. The inspections and preventative maintenance shall be performed by a competent/qualified worker

### 4.4 Record Keeping

- a. Records of the corrective actions taken on equipment should be continuously updated on Bid to Win
- b. Equipment, tools, vehicles, or facilities with overdue preventative maintenance shall be removed from service
- c. Defective equipment, tools, vehicles, or facilities shall be removed from service
- d. Third-party preventative maintenance service records are recommended to include the related work order

---

## 5. ADDITIONAL GUIDANCE

---

- a. Records of people performing in house services have qualifications kept in employee files, third-party services will be done by approved providers.

---

## 6. REFERENCES AND SUPPORTING DOCUMENTS

---

### 6.1 References

### 6.2 Supporting Documents

- a. Applicable owner manuals

---

## 7. DEFINITIONS

---

Recommended	To be considered as part of the documented, local risk assessment process.
Shall	A requirement. The introduction of exceptions to this Standard needs endorsement by senior management.
Should	A requirement. The introduction of exceptions to this Standard needs endorsement by senior management.

---

## **1. OBJECTIVE**

---

To define the minimum requirements for Training

---

## **2. SCOPE AND APPLICABILITY**

---

This Standard shall be applied to all Company personnel, contractors and their subcontractors. Contractors may with management approval, however, utilize their own standards and procedures in so far as the requirements of their standards are at least equivalent to those of this standard.

---

## **3. RESPONSIBILITIES**

---

The implementation of this Standard is the responsibility of Company senior management.

The Human Resources (HR) department is responsible for administrating and managing this standard by:

- Maintaining a listing of all job titles
- Drafting, maintaining, and updating the overall job descriptions and requirements, as required.
- Maintaining employee records of training

The safety department will provide safety orientations as well as conduct a competency and training requirement assessment of all positions and provide this information to the HR department, for inclusion in job descriptions.

Supervisors are responsible for the day-to-day application of this standard, including the ongoing monitoring of competency (s).

Employees must attend and participate in provided training.

Subcontractors shall ensure the training and competency of individuals they employ. Subcontractors shall maintain, and submit upon request, formal proof of training / competencies.

All company personnel have a responsibility to comply with this standard.

All personnel have a duty of care, to their work team and others in relation to the application and maintenance of this standard, for work they, their work team or others undertake.

---

## **4. REQUIREMENTS**

---

### **4.1 General**

- a. All workers must be properly trained / competent prior to completing a task.
- b. The selection of training must be appropriate for the individual's role and individual capacities. Therefore, an informal evaluation shall take place prior to assigning training that considers an individual's:
  - i. level of responsibilities
  - ii. abilities
  - iii. language skills
  - iv. literacy
- c. Options available to accommodate individuals using the criteria in (b) include (but not limited to):
  - i. Alternate formats of training i.e., online vs in -person
  - ii. Individual instruction
  - iii. Translation services
- d. All in-house training must be performed by competent personnel.
  - i. On-the-job training can be conducted by a foreman or supervisor.

- ii. Formal training must be performed by personnel who possess the formal mandated pre-requisites, based on jurisdiction.
- e. The completion of training does not in itself ensure competency (see section 4.4)

### 4.2 Training Needs Assessment

- a. A training and competency assessment (Safety Training Matrix) shall be completed for all job descriptions.
- b. The assessment shall include a review of
  - i. Task(s) requirements
  - ii. applicable legislated and other requirements
- c. The training needs assessment will be reviewed on an annual basis.

### 4.3 Orientation

- a. All personnel shall receive a formal company orientation prior to starting work, including:
  - i. New workers
  - ii. Young workers
  - iii. Returning workers (after a 6 month absence)
  - iv. Workers who have a change of role
  - v. Mandatory for all workers
- b. The orientation shall include:
  - i. The purpose of the company's Safety Management System
  - ii. Roles
  - iii. Responsibilities and rights
  - iv. Importance of conformity
  - v. Potential consequences for deviations or noncompliance
  - vi. Importance of workers' participation within the safety program
- c. Additional project specific orientations will be determined by site / client requirements.

### 4.4 Evaluation of learning and competency

- a. All learning and associated competencies shall be evaluated. This can take many forms, including
  - i. Informal
    - Visual verification / demonstration – often used for on-the-job training
  - ii. Formal
    - Confirmation of attendance & acknowledgement of content
    - Written test – may be required for technical or complex subject matter.

### 4.5 Administration

- a. All employee training records will be obtained and reviewed by the HR department at time of hire.
- b. The employee file is maintained by the HR department
- c. Any additional formal training given by the company will be added to the employee file
- d. Individual workers are responsible to ensure that management is informed and given formal documentation of any training given / received outside of company assignment.
- e. Periodic reviews will be completed to ensure that individuals possess the required qualifications and that certifications are up-to-date.

- f. The HR department will notify departments of a change in role to ensure that all applicable training requirements are met, prior to starting the new role.
- g. Training requests can be made via the submission of the online request form, or via request directly to the appropriate supervisor.

## 4.6 Records

- a. Records of all training shall be maintained in the electronic employee file.
- b. Records submitted by a verified union hall will be considered a valid record
- c. Orientation records are to be kept in the employee file.

---

## 5. ADDITIONAL GUIDANCE

---

- a. Mandatory training requirements vary by jurisdiction, please consult your HR or Safety team for the requirements for your jurisdiction – prior to starting work.

---

## 6. REFERENCES AND SUPPORTING DOCUMENTS

---

### 6.1 References

- Applicable trades regulations
- Local safety legislation

### 6.2 Supporting Documents

- Competency and skills analysis
- Individual job descriptions
- Listing of all job descriptions
- Worker orientation content and sign off
- Supervisor orientation content and sign off
- Training request form
- Safety Training Matrix

---

## 7. DEFINITIONS

---

Competent	Possessing the combination of training, skills and experience to safely perform a task.
Recommended	To be considered as part of the documented, local risk assessment process.
Shall	A requirement. The introduction of exceptions to this Standard needs endorsement by senior management.
Should	A requirement. The introduction of exceptions to this Standard needs endorsement by senior management.

---

## 1. OBJECTIVE

---

To define the minimum requirements for the inspection of the workplace and the equipment maintained therein.

---

## 2. SCOPE AND APPLICABILITY

---

This Standard shall be applied to all Company operations (i.e. office, yard, shop, and projects), and all personnel, contractors and their subcontractors. Contractors may with management approval, utilize their own standards and procedures in so far as the requirements of their standards are at least equivalent to those of this standard.

---

## 3. RESPONSIBILITIES

---

The implementation of this Standard is the responsibility of Company senior management.

**Foremen / supervisors**, or designates, shall ensure the completion of the required inspections (4.1) of their worksite. It is encouraged that worker representative(s) participate, whenever possible, with these inspections

**Safety personnel** will support inspections, provide technical expertise and participate when possible.

**Joint Health and safety committee / Health & safety representatives**, as applicable, must inspect the workplace on a monthly basis

**Employees** operating vehicles, machines, tools or equipment are responsible to ensure that the required inspections are completed at the proper frequency.

**All personnel** have a duty of care, to their work team and others in relation to the application and maintenance of this standard, for work they, their work team or others undertake.

**Contractors** are responsible for their personnel, and their subcontractor's personnel, compliance with this Standard and / or other standard as agreed per Section 2 above.

---

## 4. REQUIREMENTS

---

### 4.1 Inspection Types and Frequency

- a. All legislative requirements for inspections shall be adhered to as a minimum. In Ontario this means:
  - i. A supervisor or a competent person appointed by the supervisor shall inspect all machinery and equipment, including fire extinguishing equipment, magazines, electrical installations, communication systems, sanitation and medical facilities, buildings and other structures, temporary supports and means of access and egress at the project to ensure that they do not endanger any worker.
  - ii. All mechanically-powered vehicles, machines, tools and equipment rated at greater than 10 horsepower shall be inspected by a competent worker to determine whether they can handle their rated capacity and to identify any defects or hazardous conditions
- b. An inspection is required for all projects sites on a weekly basis. Whenever possible the worker representative shall participate with the site supervision conducting (at least monthly).
- c. Pre-use inspections are required for machines and heavy equipment. Results and records shall be maintained as per section 4.3
- d. All vehicles, machines, tools and equipment shall be used / inspected in accordance with any operating manuals issued by the manufacturers (see Preventative Maintenance standard)
  - i. For rented equipment such as generators, bobcats etc. it is the responsibility of the rental company to supply a compliant machine (maintenance records, certifications etc.) to site.

## 4.2 Findings and Reports

- a. Any deficiencies found during inspections should be identified on the applicable inspection report and identify corrective actions.
- b. Any potential nonconformities shall be identified and preventative actions noted on the inspection report.
- c. The form should then be sent to the appropriate manager. In the case of an electronic form submission, the proper distribution is automatic upon submission of a completed form.
- d. An inspection shall not be considered “closed” until all deficient items have been addressed and documented.

## 4.3 Results and Records

- a. Records shall be kept for workplace inspections. Inspections submitted via Kissflow are stored electronically. Paper forms will be stored and filed in the project files for archival purposes.
- b. Where practicable, the results of site inspections will be posted in prominent areas that are relevant to the area being inspected.
- c. Results of inspections may also be communicated to workers via daily task briefings or weekly project safety meetings in an effort to prevent potential con-conformities by providing corrective actions.
- d. Inspection records may also be made available on the company intranet.
- e. Records of inspections are also shared with the joint health and safety committee and other relevant workplace parties as, as applicable.
- f. Results of inspections are shared with senior management on as required to ensure thoroughness and completion. Senior management will ensure that resources are assigned, as required, to address any deficiencies outstanding.

---

## 5. ADDITIONAL GUIDANCE

---

- a. Operator manual(s) shall be used determine the need for inspection frequencies.

---

## 6. REFERENCES AND SUPPORTING DOCUMENTS

---

### 6.1 References

- a. O. Reg. 213/91: Construction Projects

### 6.2 Supporting Documents

- a. Office inspection form
- b. Weekly Project Inspection Form
- c. Shop inspection form
- d. Warehouse inspection form
- e. Daily equipment specific, pre-use inspection forms
- f. Rigging inspection form
- g. Vehicle Inspection form
- h. Tool specific inspection forms

## 7. DEFINITIONS

Should	A requirement.
Vehicle	Means a vehicle propelled by mechanical power and includes a trailer, a traction engine and a road-building machine;

### 1. OBJECTIVE

To define the minimum requirements for the reporting and investigation of work related incidents and illness.

### 2. SCOPE AND APPLICABILITY

This Standard shall be applied to all Company personnel, contractors and their subcontractors. Contractors may with management approval, however, utilize their own standards and procedures in so far as the requirements of their standards are at least equivalent to those of this standard.

### 3. RESPONSIBILITIES

The implementation of this Standard is the responsibility of Company senior management.

Company’s managers are responsible for the application of, and compliance with, this Standard at work locations where they have operational responsibilities.

Contractors are responsible for their personnel, and their subcontractor’s personnel, compliance with this Standard and / or other standard as agreed per Section 2 above.


Supervisors are responsible for the day-to-day application of this standard.

All company personnel have a responsibility to comply with this standard.

All personnel have a duty of care, to their work team and others in relation to the application and maintenance of this standard, for work they, their work team or others undertake.

### 4. REQUIREMENTS

#### 4.1 Overall process and responsibilities

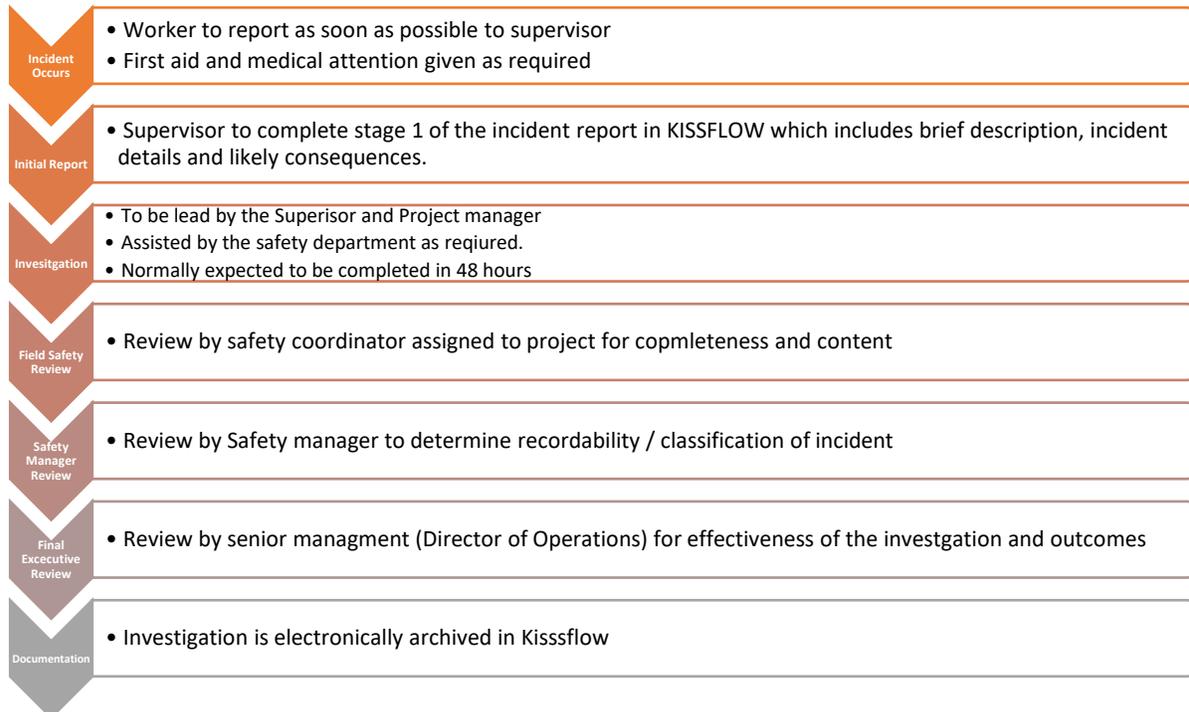

### 4.2 Reporting & notification

- a. All personnel should immediately report all incident to their foreman or supervisor in a timely manner.
- b. Examples of incidents that **MUST** be reported include:
  - Near misses
  - Any personal injury/illness/harm regardless of severity and any subsequent treatment if required (First aid treatment, Medical visits / medical treatment)
  - Property damage
  - Fire
  - Environmental impacts
  - Violence or harassment
- c. Upon being notified of an incident, the foreman or supervisor must:
  - ensure first aid treatment is provided, as required.
  - where immediate medical attention is required, the supervisor/ foreman, or a person appointed by the supervisor, must accompany the injured worker to the hospital or to a health professional.
  - Inform the Project Manager, Superintendent and Health and Safety team immediately of all accidents/ incidents in a timely manner.
    - This may be accomplished through an electronic notification process.
  - Depending on contract and client requirements, timely reporting to the client may also be required.

### 4.3 Reporting to external agencies

- a. Designated injuries and incidents must be reported to provincial health and safety regulators in the prescribed manner and timelines. Only senior company leadership, in consultation with the Safety department, may decide and authorize a decision to report to external third parties. It is therefore critical that the notification process is initiated as soon as practicable, after an incident occurs.
- b. In Ontario:
  - i. If a person is killed or critically injured from any cause at a workplace, the constructor, if any, and the employer shall notify an inspector, and the committee, health and safety representative and trade union, if any, immediately of the occurrence by telephone or other direct means and the employer shall, within forty-eight hours after the occurrence, send to a Director a written report of the circumstances of the occurrence containing such information and particulars as the regulations prescribe Investigation.
  - ii. If a person is disabled from performing his or her usual work or requires medical attention because of an accident, explosion, fire or incident of workplace violence at a workplace, but no person dies or is critically injured because of that occurrence, the employer shall, within four days of the occurrence, give written notice of the occurrence containing the prescribed information and particulars to the JHSC committee, the health and safety representative and the trade union, if any and The Director, if an inspector requires notification of the Director
  - iii. If an employer is advised by or on behalf of a worker that the worker has an occupational illness or that a claim in respect of an occupational illness has been filed with the Workplace Safety and Insurance Board by or on behalf of the worker, the employer shall give notice in writing, within four days of being so advised, to a Director, to the committee or a health and safety representative and to the trade union, if any, containing such information and particulars as are prescribed
  - iv. If an accident, premature or unexpected explosion, fire, flood or inrush of water, failure of any equipment, machine, device, article or thing, cave-in, subsidence, rockburst, or other prescribed incident occurs at a project site, mine, mining plant or other prescribed location, the company shall, within two days after the occurrence, give notice in writing with the prescribed information and particulars, to the committee, health and safety representative and trade union, if any; and to a Director.
  - v. Prescribed incidents include:
    - A worker falling a vertical distance of three metres or more.

- A worker falling and having the fall arrested by a fall arrest system other than a fall restricting system.
  - A worker becoming unconscious for any reason.
  - Accidental contact by a worker or by a worker's tool or equipment with energized electrical equipment, installations or conductors.
  - Accidental contact by a crane, similar hoisting device, backhoe, power shovel or other vehicle or equipment or its load with an energized electrical conductor rated at more than 750 volts.
  - Structural failure of all or part of false work designed by, or required by Regulation to be designed by, a professional engineer.
  - Structural failure of a principal supporting member, including a column, beam, wall or truss, of a structure.
  - Failure of all or part of the structural supports of a scaffold.
  - Structural failure of all or part of an earth- or water-retaining structure, including a failure of the temporary or permanent supports for a shaft, tunnel, caisson, cofferdam or trench.
  - Failure of a wall of an excavation or of similar earthwork with respect to which a professional engineer has given a written opinion that the stability of the wall is such that no worker will be endangered by it.
  - Overturning or the structural failure of all or part of a crane or similar hoisting device.
- c. Where an accident results in a fatality or a worker is critically injured at a workplace, no person shall interfere with, disturb, destroy, alter or carry away any wreckage, article or thing at the scene of or connected with the occurrence until permission so to do has been given by an inspector, except for the purpose of,
- i. saving life or relieving human suffering;
  - ii. maintaining an essential public utility service or a public transportation system; or
  - iii. preventing unnecessary damage to equipment or other property

#### 4.4 Investigation

- a. The project manager is responsible to ensure that an investigation, appropriate to the actual or potential severity, of an incident/accident is completed and documented using the company provided tool/form.
- b. It is a project management responsibility to perform the investigation. The health and safety department is available to provide guidance and technical assistance, as required.
- c. Depending on the severity or complexity of an investigation, consultants and technical experts may also be invited to participate.
- d. All members of the investigation team shall be suitably trained on the applicable legislative and company specific reporting requirements and investigations procedures.
- e. As required by local legislative requirements, JHSC member(s) / safety representatives should be notified and/or involved in the investigation of designated accident or incidents.
- f. The internal "Near Miss and Incident Report" or online equivalent should be completed in a timely manner and no more than within 48 hours of the occurrence. This may be an interim report for incidents that are technically complex.
- g. Investigations must identify contributing factors, OHS deficiencies, and the root cause(s) and identify all required actions to prevent a reoccurrence.

#### 4.5 Corrective and preventative actions

- a. Appropriate corrective and preventative actions must be identified.
- b. Corrective actions will be assigned to the appropriate level of management for completion with completion dates tracked.
- c. Corrective actions must address any OHS deficiencies and the identified root causes(s) in the investigation
- d. Corrective action must also be taken to mitigate any additional consequences.
- e. Corrective actions must be tracked to completion.

### 4.6 Management review

- a. Senior management will review all incident investigations to check for thoroughness and confirmation of the completion and effectiveness of all required corrective actions, prior to the incident being “closed”. Although somewhat subjective the criteria to be used shall consist of:
  - i. Do the corrective actions address the root cause?
  - ii. Are the corrective action implemented?
  - iii. Will the actions taken reduce future severity or future re-occurrence?
  - iv. Has a repeat or similar incident re-occurred.
- b. The overall effectiveness of this standard should form a part of the annual review performed by senior management.

### 4.7 Incident Review Board

- a. The IRB is a final review by company senior leadership of all actions taken, and further actions required as a result of the investigation process for all OSHA classified “Recordable incidents”, and any near miss or other incidents that have been deemed to have had an extreme potential severity.
- b. The IRB does not interfere with the normal incident investigation or corrective action process as defined in this standard.
- c. The IRB will be conducted by a panel of company senior leadership. This will typically consist of the Company president and the company Vice president for Field Operations and any other senior leadership or department leads considered to be a key stake holder.
- d. Presenters at the IRB will consist of the responsible Foreman, Project Superintendent, and the Project Manager. Additional personnel may be asked to attend if they are deemed relevant to the review.
- e. It is anticipated that the IRB will occur in a timely manner (within a month) of a qualifying incident occurring.
- f. The meeting will be scheduled by the Safety Team, based on IRB Team members’ availability, and will normally occur at the corporate office.
- g. The presenters will use the template provided by the HSE department.
- h. The Safety personnel assigned to the project will assist the presenters in collating the data, assembling the presentation, and reviewing details with the presenters prior to the IRB meeting.
- i. The presenters will review the IRB presentation with the IRB team.
- j. IRB participants will verify the incident details, investigation thoroughness, reasons for the causes identified and the appropriateness of the corrective actions taken.
- k. Additional information and/or follow-up actions may be required.
- l. Minutes will be taken, noting any additional actions required as a result of the meeting.
- m. Both the presentation and the minutes will be added to the final investigation file.

### 4.8 Training and Communication

- a. Personnel will be trained in both legislated and company specific reporting requirements and investigation procedures appropriate to their role as defined in this standard.
- b. Following the completion of an investigation, appropriate investigation results along with any identified preventative and corrective actions should be shared on the site and interested parties. This may be part of the daily briefing or weekly site safety meetings.
- c. Depending on the actual or potential severity of an incident, a formal hazard alert identifying not only the incident, but also the appropriate preventative and corrective actions required, may be developed and shared with appropriate personnel on the site and across the company.

### 4.9 Records and Investigation Results

- a. All documents, records, and investigations received / delivered, shall be electronically archived and documented via Kissflow.

## 5. ADDITIONAL GUIDANCE

- a. Return to Work Program
- b. Violence and Harassment standard

## 6. REFERENCES AND SUPPORTING DOCUMENTS

### 6.1 References

- a. Ontario Occupational Health and Safety Act

### 6.2 Supporting Documents

- a. Kissflow near miss and incident report form
- b. Incident and Investigation Policy
- c. Treatment Memorandum Form
- d. Employee Report of Accident Facts
- e. IRB template

## 7. DEFINITIONS

Near miss	an unexpected event which could have resulted in an accident
Critical injury (Ontario)	means an injury of a serious nature that, (a) places life in jeopardy, (b) produces unconsciousness, (c) results in substantial loss of blood, (d) involves the fracture of a leg or arm but not a finger or toe, (e) involves the amputation of a leg, arm, hand or foot but not a finger or toe, (f) consists of burns to a major portion of the body, or (g) causes the loss of sight in an eye.
Illness	A disease or period of sickness affecting the body or mind.
Incident	An unplanned, undesired event that may adversely affect the completion of a task.
Injury	An instance of being hurt, and can include emotional or physical harm.
Recordable injury	As defined by the U.S. OSHA in 29 CFR Part 1904, entitled Recording and Reporting Occupational Injuries and Illnesses.

---

### 1. OBJECTIVE

---

To define the minimum requirements to be undertaken to effectively manage an emergency in terms of emergency preparedness, response and recovery

---

### 2. SCOPE AND APPLICABILITY

---

This Standard shall be applied to all Company personnel, contractors and their subcontractors. Contractors may with management approval, however, utilize their own standards and procedures in so far as the requirements of their standards are at least equivalent to those of this standard.

---

### 3. RESPONSIBILITIES

---

The implementation of this Standard is the responsibility of Company senior management.

Company's managers are responsible for the application of, and compliance with, this Standard at work locations where they have operational responsibilities.

Contractors are responsible for their personnel, and their subcontractor's personnel, compliance with this Standard and / or other standard as agreed per Section 2 above.

Supervisors are responsible for the day-to-day application of this Standard.

First aid personnel are responsible for the primary provision of first aid services onsite.

Emergency wardens, where applicable, are responsible for implementing the emergency response plan once an emergency is identified.

Safety personnel will assist in developing the emergency response plans, using the emergency response plan template.

All company personnel have a responsibility to comply with this standard.

All personnel have a duty of care to their work team and others in relation to the application and maintenance of this standard, for work they, their work team or others undertake.

Individual roles and their responsibilities are detailed in the emergency response plan for individual locations.

---

### 4. REQUIREMENTS

---

#### 4.1 General

- a. Every project or site shall have an emergency response. Site emergency response plans should follow the company template / requirements.
- b. Emergency response plans shall include the input where required, and be available to, all relevant parties including:
  - i. Local fire departments (where required)
  - ii. Clients
  - iii. Tenants (if applicable)
  - iv. Other stake holders as applicable
- c. The Emergency response plan template include roles and responsibilities of relevant employees during specific emergencies.
- d. Emergency response plans must address the hazards and the corresponding potential emergency situations, present in the specific workplace i.e., fire, flood etc., based on the applicable Job Safety Analysis that is completed for every project.
- e. The focus of all plans is the prevention or minimization of injury or occupational illness for the identified emergency situations.

# Emergency Preparedness

## Standard | PDI HSE – S011



- f. Emergency communication systems shall be put in place appropriate to the workplace. Each site-specific plan will identify the appropriate system(s) to be used. This can take many forms including:
  - i. Visual and audible alarm systems
  - ii. Electronic & Cell communications
  - iii. Audible devices i.e., air horns
- g. Personnel shall be given emergency response information appropriate to their role
  - i. All workers, visitors, contractors shall have knowledge of the emergency response plan for their site.
  - ii. Emergency personnel such as fire wardens will have role specific training as defined in the plan.
  - iii. All relevant information will be provided to emergency response services, government authorities and the community regarding emergency procedures.
- h. Plans shall be reviewed and tested as required, at a minimum annually.
  - i. Records of testing and review shall be maintained.
  - ii. Any corrective actions shall be recorded.
  - iii. Workers have the responsibility to report all injuries immediately to their supervisor.

### 4.2 Resources

- a. All required resources needed to implement the emergency response plans shall be identified in the site-specific plan. The plan shall take into account all known hazards. However, they all shall contain:
  - i. Fire extinguishers
  - ii. Methods of communicating the emergency
  - iii. First aid response supplies and locations – including stretchers as required.
  - iv. First aid personnel
  - v. Muster points
- b. All required emergency equipment shall be in place and well-marked as per the plan.
- c. Equipment shall be inspected, and maintained at regular intervals in accordance with manufacturers' specifications such as:
  - i. Monthly and annual fire extinguisher inspections using dated tags.
  - ii. Dates inspection tags on eye wash stations / bottles
  - iii. AED Inspected monthly, using dated sticker / posting.
  - iv. Monthly first aid kit inspections with dated stickers (including stretchers where required)
- d. Forms for recording results of emergency drills are available in the site-specific emergency response template.

### 4.3 First Aid

- a. Compliance
  - i. Compliance with all applicable first aid and worker compensation laws and regulations is mandatory.
  - ii. First aid and worker compensation rules and regulations vary from province to province, so it is important to review the applicable rules in your jurisdiction prior to starting work.
  - iii. Many jurisdictions mandate the posting of workplace safety reporting information.
- b. Availability of personnel
  - i. First aid personnel assigned to a first aid station / kit must work in the immediate vicinity and be available should a need arise.
  - ii. The number of first aid personnel required in a workplace varies depending on the jurisdiction and should be reviewed prior to starting work.
- c. Training

# Emergency Preparedness

## Standard | PDI HSE – S011



- i. All designated first aid personnel must successfully complete training by a recognized training authority for the jurisdiction they are working in.
  - ii. Qualified first aid personnel will be on site in compliance with local legislation, copies of valid first aid certificates will be visible and readily available at the first aid station for the designated first aid attendant.
  - iii. First aid training records will be reviewed on a regular basis, normally as part of the regular workplace inspection, to ensure qualified attendants are available when and where required.
- d. First aid station, facilities, and supplies
- i. The required number and contents of first aid kits / stations in a workplace varies depending on the jurisdiction and should be reviewed prior to starting work.
  - ii. First aid supplies should be readily accessible.
  - iii. The contents of the first aid station / kits will be reviewed on regular basis, normally as part of the regular workplace inspection, to ensure mandated supplies (including stretchers where applicable) are available when and where required.
- e. Transportation
- i. The company will arrange for and provide transportation appropriate to the level of injury to the hospital, doctor's office, or worker's home, following an injury or illness at work.
- f. Records
- i. Records of all first aid treatment / advice shall be maintained.
  - ii. Records can be kept in the company incident reporting system or by completing a record in the supplied record book located in the first aid station / kit.

---

## 5. ADDITIONAL GUIDANCE

---

- a. When you call 911 (or emergency services state):
- i. Nature of emergency: Such as vehicle collision, fire, medical or trauma emergency, behavioral emergency, situation requiring law enforcement, or special situation (such as hazardous materials spill or other issue requiring containment or special rescue).
  - ii. Location of emergency: Be as specific as possible. Examples: The specific area of the building or property, which side of the road or intersection and any instructions for accessing the site including the direction of approach or gate/security codes
  - iii. A call back number: In case the call is disconnected, or responders have trouble finding the site.
  - iv. Number of people affected and their conditions: This is important so an appropriate number of resources can be sent. Helpful basic information to provide includes whether the victims are breathing, pulse present and any significant bleeding or other life-threatening injuries.

---

## 6. REFERENCES AND SUPPORTING DOCUMENTS

---

### 6.1 References

- First aid Requirements - R.R.O. 1990, R 1101
- Workplace Safety and Insurance Act, 1997

### 6.2 Supporting Documents

- Site Emergency Plan Template
- Ontario WSIB Form 82 – In case of injury

# Emergency Preparedness

## Standard | PDI HSE – S011



- Standard S01 – Incident and accident Reporting Standard
- Office emergency response plan
- First aid kit record inspection stickers

---

### 7. DEFINITIONS

---

Recommended	To be considered as part of the documented, local risk assessment process.
Shall	A requirement. The introduction of exceptions to this Standard needs endorsement by senior management.
Should	A requirement. The introduction of exceptions to this Standard needs endorsement by senior management.

---

## 1. OBJECTIVE

---

To define the minimum requirements for organizing, monitoring and measuring OH&S performance

---

## 2. SCOPE AND APPLICABILITY

---

This Standard shall be applied to all Company personnel, contractors and their subcontractors. Contractors may with management approval, however, utilize their own standards and procedures in so far as the requirements of their standards are at least equivalent to those of this standard.

---

## 3. RESPONSIBILITIES

---

The implementation of this Standard is the responsibility of Company senior management.

Company's managers and supervisors are responsible for the application of, and compliance with, this Standard at work locations including the monitoring of safety performance and input of required safety data where they have operational responsibilities.

Safety personnel will compile and distribute the identified safety data and results.

Payroll / finance will provide actual hours worked to the safety department for use in statistical performance.

Supervisors are responsible for the day-to-day application of this Standard.

All company personnel have a responsibility to comply with this standard.

All personnel have a duty of care, to their work team and others in relation to the application and maintenance of this standard, for work they, their work team or others undertake.

---

## 4. REQUIREMENTS

---

### 4.1 Frequency

- a. OHS performance will be measured at the following intervals
  - Annually – a formal presentation will be prepared containing the information required in the Management Review Standard (PDI HSE – S014) and section 4.2
  - Monthly – using the monthly Safety Report Template and data collected in our online safety system (Kissflow)
  - As required by contract or client requirements

### 4.2 Methodology

- a. The standardized methods and supporting forms specified in this document shall be used for the appropriate reviews.
- b. As per the company Management Review and Management of Change Policy and supporting Standard, annual reviews of the safety performance of the company are conducted. These reviews will include:
  - i. Analysis of the overall progress on the annual safety objectives set by the company.
  - ii. Comparison of current and past safety performance
  - iii. Analysis of safety statistics identifying trends
  - iv. Analysis of first aid records
  - v. Review of statistics of both leading and lagging indicators
- c. A monthly safety performance summary for the company will be produced.
- d. Normally a project safety performance summary is not produced, unless requested by a specific client(s).

### 4.3 Proactive / Leading Indicators

- a. Proactive data includes:
  - Hazard Identifications
  - Behavior observations / inspection
  - First aid / no treatment reports
  - Near miss reports

### 4.4 Reactive / Lagging Indicators

- a. Reactive data includes:
  - Medical treatment reports
  - Modified duties
  - Lost Time
  - Fatalities

### 4.5 Statistical analysis (quantitative)

- a. Data shall be analyzed to identify overall performance trends and the effectiveness of any controls measures implemented.
- b. Qualitative data shall also be used in determining any continuous improvement activities.
- c. General performance data shall be tracked by using the OSHA Recordable frequency guidelines:
  - o number of recordable incidents x 200 000 / actual man hours worked
- d. As there are many jurisdictional and client standards and formats for data reporting, data can be examined at any time to meet individual project requirements. Examples include: Provincial worker compensation systems, national standards, industry standards, client standards etc.

### 4.6 Qualitative

- a. Qualitative data may be obtained by such actions as:
  - Evaluations of employee morale / employee engagement
  - Root cause analysis
  - Perception surveys
  - Employee interviews
- b. Qualitative data shall be used on an as needed / when available basis to supplement data used to evaluate the safety performance of the company.

### 4.7 Communication

- a. Both the monthly and annual safety performance reports shall be shared with the company JHSC and the senior management Team.
- b. A high level overview of company performance, trends and relevant audit results will be communicated to all staff via town halls and safety updates throughout the year, as deemed necessary.
- c. Results can also be shared with other interested / relevant workplace parties, as determined on a case-by-case basis.

### 4.8 Records

- a. Completed monthly reports and the annual safety review presentation shall be stored in the safety performance folder of the safety drive.
- b. All project related records are kept in the overall project file.
- c. Safety data collected and retained online within Kissflow includes:
  - Incident reporting
  - Proactive observations
  - Weekly safety meetings
  - Weekly inspections

---

## 5. ADDITIONAL GUIDANCE

- a. Actions plans are developed based on the objectives set during the annual review, and progress on the items in the action plan can also be measured.

---

## 6. REFERENCES AND SUPPORTING DOCUMENTS

### 6.1 References

OSHA 1904.7 - General recording criteria

### 6.2 Supporting Documents

- a. Inspections reports (Kissflow online)
- b. Near miss and Incident reports (Kissflow online)
- c. Safety observation report (Kissflow Online)
- d. Monthly Safety Report template

---

## 7. DEFINITIONS

Recommended	To be considered as part of the documented, local risk assessment process.
Shall	A requirement. The introduction of exceptions to this Standard needs endorsement by senior management.
Should	A requirement. The introduction of exceptions to this Standard needs endorsement by senior management.

# Legislative and Other Requirements

## Standard | PDI HSE – S013



---

### 1. OBJECTIVE

---

To define the minimum requirements for ensuring compliance with legislative and other regulatory requirements.

---

### 2. SCOPE AND APPLICABILITY

---

This Standard shall be applied to all Company personnel, contractors and their subcontractors. Contractors may with management approval, however, utilize their own standards and procedures in so far as the requirements of their standards are at least equivalent to those of this standard.

---

### 3. RESPONSIBILITIES

---

#### Senior Management:

- Will establish, implement, monitor and maintain a procedure to identify and document legal and other requirements that are applicable to our business activities
- Will ensure all legal and other requirements will be taken into account, and incorporated as appropriate, into the establishment, implementation and maintenance of the health and safety program
- Ensure all Supervisors/Managers follow all applicable laws, acts, statues etc.
- Will ensure that the documentation of legal and other requirements is kept current, and that relevant information related to the legal and/or other requirements are communicated to the workplace parties as appropriate.
- Will Access Compliance Obligations using various media and resource materials to compile a robust Compliance Register of all Federal, Provincial and Municipal By-laws, Standards, Codes, Acts and Statues that may apply to our business.

#### Health and Safety Manager/Designate/Department:

- Will identify legal and other Health Safety and Environment requirements that apply using all available resources, media and partners.
- Will communicate findings as necessary to Senior Management, Supervisors/managers etc.
- Will update or have updated the Compliance Register as a minimum on an annual basis or as required.

#### Employees:

- Follow all legal or other requirements at all times when in the workplace.
  - Do not operate any equipment that they have not been trained or licensed to operate.
- 

### 4. REQUIREMENTS

---

#### 4.1 Identification of applicable legislation & other requirements

- a. The company will compile a robust Compliance Register of all Federal, Provincial and Municipal By-laws, Standards, Codes, Acts and Statues that may apply to our business.

#### 4.2 Compliance Monitoring and Evaluation

- a. Monitoring and evaluation of compliance to legislative and other requirements will be done on an ongoing basis via:
  - i. Weekly project inspections
  - ii. Monthly JHSC inspections
  - iii. Safety personnel site visits, inspections and reports
  - iv. Audits as required

### 4.3 Accessibility

- a. Due to the nature of the demolition business, hard copies of all documentation may not be available at all sites. Whenever possible hard copies / instruction of how to obtain legislative and other requirements will be posted.
- b. When available employees can access copies of relevant legislation through the computer at their workstations.
- c. All employees have access to current legislative and other requirements vis their supervisors tablet / connected device, which all have access to applicable legislative and other requirements.

### 4.4 Review & Evaluation

- a. Any deviancies noted by a legislative or other authority shall be reviewed with the applicable management in a timely manner.
- b. The compliance register will be reviewed on a minimum annual basis
  - i. The review will be documented as part of the annual review process
- c. An annual review / evaluation of all safety, environmental or other applicable authority documentation will be conducted
  - i. Any deficiencies shall be noted and included in the annual management review

---

## 5. ADDITIONAL GUIDANCE

---

- Various media and resource materials may be ruded to compile a robust Compliance Register of all Federal, Provincial and Municipal By-laws, Standards, Codes, Acts and Statues that may apply to our business.

---

## 6. REFERENCES AND SUPPORTING DOCUMENTS

---

### 6.1 References

- A comprehensive list of Canadian Federal and Provincial HSE legislation is available from the Canadian Centre for Occupational Health and Safety (CCOHS) which can be accessed at <http://www.ccohs.ca/legislation/>

### 6.2 Supporting Documents

- Legislative requirements listing
- Safety organisations and information listing
- JHSC inspections
- Safety Team Site Visit Reports
- Weekly Project inspection reports

---

## 7. DEFINITIONS

---

Recommended	To be considered as part of the documented, local risk assessment process.
Shall	A requirement. The introduction of exceptions to this Standard needs endorsement

# Legislative and Other Requirements

## Standard | PDI HSE – S013



	by senior management.
Should	A requirement. The introduction of exceptions to this Standard needs endorsement by senior management.

---

## 1. OBJECTIVE

---

To define the minimum requirements for the annual Review of the Safety, Health and Environmental program.

---

## 2. SCOPE AND APPLICABILITY

---

This Standard shall be applied to all Company personnel.

---

## 3. RESPONSIBILITIES

---

The implementation of this Standard is the responsibility of Company senior management.

Company's managers are responsible for the application of, and compliance with, this Standard at work locations where they have operational responsibilities.

---

## 4. REQUIREMENTS

---

### 4.1 Frequency

- a. As per the Statistics and record policy and standard, annual objectives are set for the HSE performance of the company by the company leadership team.
- b. The annual meeting shall take place in Q1 of each year, when possible.

### 4.2 Methodology

- a. The annual review shall include, as defined in the annual agenda document:
  - Evaluation of the effectiveness of all elements of the safety program.
  - Status of actions from previous management reviews
  - Results of internal audits, including COR audits
  - Evaluation of compliance with legal requirements
  - Results of participation and consultation with employees/Health and Safety Representative /Joint Health and Safety Committee
  - Any relevant information and communication from external parties i.e., regulators
  - The safety performance of the company
  - Review of the progress against the annual objectives
  - Status of incident investigations,
  - trends identified
  - implementation of corrective actions,
  - implementation of preventative actions and status of actions taken
  - Changing circumstances related to OHS such as developments in legal requirements or technology
  - Identified barriers to worker participation in the OHSMS
  - Recommendations for improvement

### 4.3 Outputs

- a. The OHS policy will be updated if any deficiencies were identified in 4.2.
- b. OHS objectives will be set for upcoming year. Objectives shall include:
  - i. Any deficiencies were identified in section 4.2.

- ii. Must be measurable.
- c. Action plans based on the objectives identified will be developed.
- d. Required resources to achieve the objectives will be identified on the action plan.
- e. Revisions to any other elements of the OHSMS as appropriate.
- f. Any identified barriers to worker participation will be identified and will form part of the action plan.
- g. The action plans and objectives will be communicated with staff

#### 4.4 Record retention

- a. Records of the meeting objectives and action plans will be retained for a minimum of three years and archived electronically, using the management review templates.

---

## 5. ADDITIONAL GUIDANCE

---

- a.

---

## 6. REFERENCES AND SUPPORTING DOCUMENTS

---

### 6.1 References

Annual Review Policy

### 6.2 Supporting Documents

- a. Annual Review Meeting Agenda
- b. Annual Review Meeting Minutes
- c. HSE Objectives and Action Plan

---

## 7. DEFINITIONS

---

Recommended	To be considered as part of the documented, local risk assessment process.
Shall	A requirement. The introduction of exceptions to this Standard needs endorsement by senior management.
Should	A requirement. The introduction of exceptions to this Standard needs endorsement by senior management.

# Management of Change

## Standard PDI HSE – S015



---

### 1. OBJECTIVE

---

To define the minimum requirements for the company's Management of Change (MOC) affecting health and safety.

This Standard shall be applied to all Company personnel, contractors and their subcontractors. Contractors may with management approval, however, utilize their own standards and procedures in so far as the requirements of their standards are at least equivalent to those of this standard.

---

### 2. RESPONSIBILITIES

---

The implementation of this Standard is the responsibility of Company senior management.

Company's managers are responsible for the application of, and compliance with, this Standard at work locations where they have operational responsibilities.

Contractors are responsible for their personnel, and their subcontractor's personnel, compliance with this Standard and / or other standard as agreed per Section 2 above.

Supervisors are responsible for the day to day application of this standard.

All company personnel have a responsibility to comply with this standard.

All personnel have a duty of care, to their work team and others in relation to the application and maintenance of this standard, for work they, their work team or others undertake.

---

### 3. REQUIREMENTS

---

#### 3.1 Application

- a) Formal management of safety change must be used for the following situations:
  - i. Changes in legal requirements
    - Changes to legal requirements are typically reviewed on an annual basis – see Management review Standard
    - Formal management of safety change may be conducted if legal changes occur in between reviews, on an as-needed basis
  - ii. Introduction of new products, processes or services
    - Process to be followed for all planned activities on all new projects
  - iii. Significant changes in work processes, control measures, equipment, organization, work locations.
    - This includes significant changes to planned project based activities
  - iv. Introduction of new developments in OHS knowledge or technology
    - To be completed an as-needed basis
- b) Any changes outside of the above noted requirements affecting health and safety can use the company's internal change request form to start the process

#### 3.2 Process

- a) The processes described in both the Hazard Assessment, Analysis and Control standard and the Controls standard shall be used where the formal management of safety change is required.

---

#### 4. ADDITIONAL GUIDANCE

---

- a) Training / appropriate information shall be provided to relevant parties involved in supporting and completing this process.

---

#### 5. REFERENCES AND SUPPORTING DOCUMENTS

---

##### 5.1 References

- Section 7 of Regulation 851, Industrial Establishments, (the Industrial Establishments Regulation) under the Ontario Occupational Health and Safety Act (OHSA)

##### 5.2 Supporting Documents

- Job Hazard Analysis form
- Hazard assessment, analysis and controls policy and standard
- Controls policy and standard
- Internal Change Request form

---

#### 6. DEFINITIONS

---

PSR	In Ontario, pre-start health and safety reviews (PSHSRs or PSRs) are required before certain equipment or processes are put into operation to keep workers safe.
Recommended	To be considered as part of the documented, local risk assessment process.
Shall	A requirement. The introduction of exceptions to this Standard needs endorsement by senior management.
Should	A requirement. The introduction of exceptions to this Standard needs endorsement by senior management.

# Management of Change

Standard PDI HSE – S015



## Internal Change Request Form



ICR#:		Date:	
Initiator:		Supervisor:	
B2W Account #:			

### Description of Change:

Please describe:  
1) The current situation  
2) The purpose of the change  
3) The expected outcome from the change

### Site Suggestion:

# Safety Communication Standard

## Standard | PDI HSE - S016



---

### 1. OBJECTIVE

---

To define the minimum requirements for safety documentation, document control and record control.

---

### 2. SCOPE AND APPLICABILITY

---

This Standard shall be applied to all Company personnel, contractors, and their subcontractors. Contractors may with management approval utilize their own standards and procedures in so far as the requirements of their standards are at least equivalent to those of this standard.

---

### 3. RESPONSIBILITIES

---

All workers, management, contractor/subcontractor, constructor, owner, and employer collectively share health & safety responsibilities and must comply with this standard.

#### Management

- Ensure safety moments are discussed, documented at senior leadership meetings.

#### Supervision

- Complete site level communication as documented in this standard.
- Ensure documentation processes are followed as prescribed.

#### Safety Personnel

- Develop and distribute the weekly safety update.
- Lead the response to formal external safety inquiries.
- Participate, when possible, in field and management communication.
- Establish a safety documentation and archival process as defined in this standard including both electronic and physical documents as appropriate.

#### Employees

- Communicate any issues or concerns.
- Participate in active 2-way communication.

#### Contractors

- Ensure their personnel are informed of this standard. Contractors may use their own standard if it meets or exceeds the requirements in this document.
  - Participate as necessary in safety communications.
- 

### 4. REQUIREMENTS

---

#### 4.1 General

- a. The company, in its endeavour to create a healthily and safe work environment, as outlined in our health and safety policy statement, believes that communication is the key to our health and safety program.
  - i. All meetings listed in this standard will be documented with confirmation of attendance using sign in sheet.
  - ii. All communication shall provide an opportunity for input from workers.
  - iii. All communication will be delivered in a manner that is understood by the receiver of the message and considers ability, language skills and literacy.
  - iv. Communication may be both formal and informal, scheduled and routine, and in response to various emergencies, incidents that have occurred, or in direct response to a risk.

# Safety Communication Standard

## Standard | PDI HSE - S016



- v. All forms of communication received/delivered internally or externally corresponding to OHS communications will be documented and electronically or physically archived as specified for each type of communication listed below for future access.

### 4.2 Records to be Maintained

- a. Toolbox talks
  - i. Shall occur on a daily basis on all project sites
  - ii. Shall involve workers at the site / on that task
  - iii. Shall focus on the tasks and hazards associated with the work planned for that day
  - iv. Shall incorporate the daily Field Level Hazard Assessment form.
  - v. Project supervision will ensure that the form is signed and stored with the project files.
- b. Safety meetings
  - i. Will be held weekly on all project sites
  - ii. A safety topic will be discussed, and a forum will be allowed for workers to bring forward any relevant concerns or suggestions
  - iii. Attendance will be taken by project supervision and input in the KISSFLOW electronic form for electronic record keeping.
- c. Semi-annual Town hall meetings
  - i. Meetings will be held with all employees invited to attend in person and/or virtually where attendance in person is not possible
  - ii. All attendees will be able to speak and bring forward questions.
  - iii. Senior management will present and attend.
  - iv. Relevant safety aspects of the safety program and safety performance will be included.
  - v. Content will be recorded electronically (video) and posted on the company intranet.
- d. Weekly safety updates / email communications
  - i. On a weekly basis the safety department produces a safety update on a relevant safety topic and reviewing learnings from a recent incident.
  - ii. The safety department will archive in the internal department files.
- e. Safety Moments
  - i. A relevant safety moment will start the senior leadership review meetings.
  - ii. Records will be kept with the meeting minutes and archived electronically by the executive team files.
- f. JHSC Communications
  - i. As required by legislation, Joint Health & Safety Committees are expected to communicate the minutes of JHSC meetings and results of any OHS facility inspections. This information is forwarded to the Safety Department/Supervisor or designate (OHS) who posts the minutes electronically on the internal Intranet Site.
  - ii. The JHSC is also required to post a hard copy of the minutes in the local area, on the site Health & Safety Board.
  - iii. An electronic JHSC file is maintained of the above by safety department.

# Safety Communication Standard

## Standard | PDI HSE - S016



### 4.4 Other Means of Communication

- a. Postings on Safety boards
  - i. Will contain only documentation approved by the Safety department.
  - ii. Project specific documentation will be stored in the safety folder of the project files.
- b. Company newsletter
  - i. From time to time the company may produce a newsletter. Safety will be incorporated in the newsletter.
  - ii. Records will be kept by the producing department in their internal files

### 4.3 External Communication

- a. Any safety inquiry originating from an external (Client etc) or regulatory authority should be directed to the HSE department.
- b. Prior to reporting to any external regulatory authority, the Safety Department/Designate must be consulted, and where applicable, the Safety Department/Designate will file the report.
- c. Any information surrounding a critical injury/serious incident will be reported to the Ministry of Labour (or appropriate local jurisdiction), JHSC, Health and Safety Representative and trade union. A written report to the authority will be sent within 48 hours of the incident or within the applicable prescribed limits.
- d. In the event of an incident or unexpected event (explosion flood, equipment failure), in Ontario, a report containing any prescribed information will be reported to the JHSC/Health and Safety Representative, trade union (if any) and a Director within two days of the incident.
- e. All forms of written communication will be documented in the applicable safety department electronic folder.

---

## 5. ADDITIONAL GUIDANCE

---

- a. All other forms of safety communication should be reviewed with the safety department prior to distribution, to ensure proper content, distribution and to archival processes are filed
- b. The definition of “critical injury” or “serious occurrence” varies by province / state.

---

## 6. REFERENCES AND SUPPORTING DOCUMENTS

---

### 6.1 References

- a. Applicable safety legislation

### 6.2 Supporting Documents

- a. Field Level Hazard form
- b. Tool Box Meeting Form
- c. Sign in Sheet
- d. JHSC Meeting Minutes Form

# Safety Communication Standard

## Standard | PDI HSE - S016



### 7. DEFINITIONS

Recommended	To be considered as part of the documented, local risk assessment process.
Shall	A requirement. The introduction of exceptions to this Standard needs endorsement by senior management.
Should	A requirement. The introduction of exceptions to this Standard needs endorsement by senior management.

# Return to Work and Re-employment

## Standard | S017



---

### 1. OBJECTIVE

---

To define the Return to Work and Re-employment process for employees affected by a work related injury or illness.

---

### 2. SCOPE AND APPLICABILITY

---

This Standard shall be applied to all Company personnel.

---

### 3. RESPONSIBILITIES

---

#### Employee

- Report injuries as they happen following the appropriate company protocols and legislated requirements.
- Request accommodation when needed and suggest appropriate measures, if possible.
- Employees shall establish and maintain contact with their supervisor and Workers Compensation Coordinator regarding their injury rehabilitation progress. Contact should be made as frequently as the situation deems necessary as to maintain ongoing communication between parties.
- Employees shall obtain and follow all medical advice, and work towards full recovery.
- Provide information/documentation from a qualified health care professional to clarify health restrictions and describe the type of accommodation that would be most effective.
- Shall produce documentation from their health care provider to act as medical evidence supporting the fact that they cannot return to work for an extended period, and whether or not a RTW plan, or accommodation plan could expedite the employee's safe return to work.
- Employees shall put forth a reasonable effort to return to work safely, as early as possible.
- Actively participate in discussions regarding accommodation solutions whilst working with the accommodation provider on an ongoing basis to manage the RTW process.
- Employees shall provide their Priestly Demolition Inc. contact with all pertinent information that could aid in the establishment of RTW options.
- Provide reasonable notice of their intended return to work date, along with the details of any requested accommodations to allow for adequate planning/implementation time.
- Continue communication upon returning to work to monitor their progress and assess the effectiveness of their accommodations/modifications, communicating the need for revisions of the accommodations as required.
- Achieve the agreed-upon job performance standards once accommodation is provided.

#### Supervisor

- Shall maintain and document all contact conducted throughout the duration of the employee's absence.
- Identify employment opportunities based on the returning employees' abilities and limitations.
- Establish a timeline for the return of the absent employee, and any changes in their ability to work.
- Shall take an active part in the planning, implementation, and continuous monitoring of the return to work arrangements for the employee.

# Return to Work and Re-employment

## Standard | S017



- Shall monitor the progress of the employee upon having them reintegrated into the workplace for the purpose of ensuring that the accommodations/modifications of duties are adequate based on their capabilities as to avoid further injury.

### **Workers Compensation Coordinator**

- Shall establish and maintain communications with employees who sustain a work-related injury or illness resulting in a loss of work time. Communication will be made as frequently as the situation calls for in a way that does not put pressure on the employee to return before they are able.
- Shall create and maintain a case file that houses all relevant documentation pertaining to the work related injury/illness, WSIB, medical documentation, return to work plans, and communications exchanged with the employee.
- Shall request that the employee produce documentation from his/her physician to communicate any information on limitations resulting from the injury through the completion of a Functional Abilities Form.
- Collect all relevant documentation that outlines how an employee's medical condition will affect their ability to perform job duties, this does not include a diagnosis of the condition itself as per an employee's right to privacy.
- Request employee consent to obtain further medical or health information, if necessary, in order to identify and implement any modifications/accommodations.
- Will facilitate and implement the RTW process.
- Provide the absent employee with information regarding the RTW process, and ensure that they understand the procedures, and their responsibilities.
- Shall communicate with the employee, union or association, supervisor, and attending physician to ensure a complete understanding of the absent employee's abilities, possible job restrictions, the physical job demands required, and a timetable for a return to work.
- Shall attempt to find an appropriate job match in the event that an injured employee cannot return to their pre-injury position.
- Maintain confidentiality in all matters pertaining to the medical documentation provided by both the employee and their licensed medical practitioner with respect to employee privacy and dignity.

---

## **4. PRINCIPLES**

---

In the event of a work related injury or illness, all employees are expected to report the incident immediately to their immediate supervisor, as well as the Health & Safety Department as per the company incident reporting process.

Should the injury cause the employee to require time away from work, or create a disability that restricts their ability to work, the employee will be expected to return to work as soon as it is safe to do so. In accordance with legislative and company requirements, it is mandatory that all employees participate in the Return To Work (RTW) program.

It is important that employees provide Priestly Demolition Inc. with detailed information pertaining to their inability to perform their employment duties from a qualified licensed medical practitioner. The Functional Abilities Form is to identify any necessary modifications and/or accommodations that are required to reintegrate the employee into the workplace in a safe manner.

Priestly Demolition Inc. is committed to Return to Work/ Work Reintegration program and will consider the employee's dignity and support the employee in the transition period following his/her injury or illness.

# Return to Work and Re-employment

## Standard | S017



---

## 5. PROCESS

---

### 5.1 Loss Time Injury/Illness Procedure

1. An incident occurs relating in an injury, or the onset of an illness
2. Worker reports the injury to a supervisor, then seeks medical attention immediately if needed
3. Supervisor does a submission of an accident/incident investigation report via KiSSFLOW
4. Health & Safety department will review the documentation and make contact with the employee, supervisor, and any potential witnesses to investigate the incident.
5. Worker will undergo medical examination from a licensed medical practitioner who will submit Form 8, and a FAF as required.
6. Worker will be responsible for submitting form 6.
7. Employer will use all details gathered from report and communications received from all parties involved to complete and submit form 7 within the legislated time frame of seven (7) days.
8. Workers Compensation Coordinator will review the FAF submitted by the health care practitioner to determine whether there is a requirement to accommodate/provide modified working conditions.
9. Workers Compensation Coordinator will review the nature of the position the employee is currently employed in, and reach out to the employee to discuss potential limitations that require accommodation as per the FAF.
10. The employer recognizes and accepts their duty to accommodate individuals to the point of undue hardship as part of the work reintegration process and will provide modifications accordingly.
11. The employee shall actively engage in the return to work process by keeping in contact with Workers Compensation Coordinator to determine the earliest possible date in which they would be able to safely return to work.
12. Workers Compensation Coordinator will maintain ongoing contact with the employee throughout the duration of their absence to support the RTW process and determine the employee's eligible return date.
13. The employee will make visits to the licensed medical practitioner as needed to provide updates on their condition and possible changes to the required accommodations that will be needed upon their return to work.
14. The employee will supply the employer with reasonable notice of their anticipated RTW date as to allow adequate planning and implementation of the agreed upon RTW program.
15. Workers Compensation Coordinator will communicate with the employee and present options of recommended restricted duties, potential modifications or alternative suitable positions in which the employee can fill until such a time they are prepared to return to their initial position.
16. Workers Compensation Coordinator will present the employee with a formal proposed Work Reintegration plan which the employee will review, and in turn communicate their needs/proposed ideas as needed in order to work in collaboration with the employer to support the process. Available jobs include:
  - Flagman duties – Direct onsite traffic. Must have ability to stand, limited mobility required
  - Fire Watch – Limited mobility or physical exertion required, ability to sit
  - Housekeeping – Sweeping and cleaning. Limited mobility or physical exertion, ability to stand, walk short distances
  - Office - Data input – Required ability to sit, and concentrate for medium term
  - Document control – Filing. Ability to sit / stand for short periods, able to concentrate for medium term
  - Safety or other work related training courses – eLearning or in person training. ability to concentrate and sit for extended periods required
  - Security – Site patrol. ability to walk extended distances, able to concentrate
  - Delivery – drive to site and drop off packages. ability to drive, sit for medium term
  - Supervisor assistant (various duties depending on need)

17.

# Return to Work and Re-employment

## Standard | S017



18. Workers Compensation Coordinator will communicate with the WSIB case manager and have the employee, as well as their qualified medical practitioner, sign off on the agreed upon RTW program to acknowledge acceptance.
19. Any discrepancies or disagreements may be appealed by following the WSIB appeal process.
20. The supervisor will be made aware of the limitations of the employee as to ensure that the duties being performed by the individual are within the capabilities outlined in the FAF.
21. Supervisors will communicate with employees on an ongoing basis to evaluate the effectiveness of the modifications and vocalize any potential concerns to Workers Compensation Coordinator.
22. Employees maintain their responsibility to communicate updates, progress, concerns, and/or required changes to the modifications/accommodations that have been provided.
23. Workers Compensation Coordinator will meet with the employee as needed to review the progress of their RTW plan, and reinstate them to their initial position in which they were employed when it is acceptable to do so as per a re-evaluation and updated FAF provided by a licensed medical practitioner.
24. Failure to comply with the above and legislated procedural requirements will result in WSIB penalization as outlined under the non-cooperation clause of this policy.

### **5.2 Non-Loss Time Injury/Illness Procedure**

1. An incident occurs relating in an injury, or the onset of an illness
2. Worker reports the injury to a supervisor, then seeks medical attention immediately if needed
3. Supervisor does a submission of an accident/incident investigation report via Kiss flow
4. Health & Safety department will make review the documentation and make contact with the employee, supervisor, and any potential witnesses to investigate the incident.
5. Worker will undergo medical examination from a licensed medical practitioner who will submit Form 8, and a FAF as required.
6. Worker will be responsible for submitting form 6.
7. Employer will use all details gathered from report and communications received from all parties involved to complete and submit form 7 within the legislated time frame of seven (7) days.
8. Workers Compensation Coordinator will review the FAF submitted by the health care practitioner to determine whether there is a requirement to accommodate/provide modified working conditions.
9. Workers Compensation Coordinator will review the nature of the position the employee is currently employed in, and reach out to the employee to discuss potential limitations that require accommodation as per the FAF.
10. The employer recognizes and accepts their duty to accommodate individuals to the point of undue hardship as part of the work reintegration process and will provide modifications accordingly.
11. The employee actively engages in the return to work process by keeping in contact with Workers Compensation Coordinator to determine the earliest possible date in which they would be able to safely return to work.
12. Workers Compensation Coordinator will communicate with the employee and present options of recommended restricted duties, potential modifications or alternative suitable positions in which the employee can fill until such a time they are prepared to return to their initial position. Available jobs include:
  - Flagman duties
  - Fire Watch
  - Housekeeping
  - Office / data input
  - Document control
  - Safety or other work related training courses
  - Security
  - Delivery

# Return to Work and Re-employment

## Standard | S017



- Supervisor assistant (various duties depending on need)
- 1. Workers Compensation Coordinator will present the employee with a formal proposed Work Reintegration plan which the employee will review, and in turn communicate their needs/proposed ideas as needed in order to work in collaboration with the employer to support the process.
- 2. Workers Compensation will communicate with the WSIB case manager and have the employee, as well as their qualified medical practitioner, sign off on the agreed upon RTW program to acknowledge acceptance.
- 3. Any discrepancies or disagreements may be appealed by following the WSIB appeal process.
- 4. The supervisor will be made aware of the limitations of the employee as to ensure that the duties being performed by the individual are within the capabilities outlined in the FAF.
- 5. Supervisors will communicate with employee's on an ongoing basis to evaluate the effectiveness of the modifications and vocalize any potential concerns to Workers Compensation Coordinator.
- 6. Employees maintain their responsibility to communicate updates, progress, concerns, and/or required changes to the modifications/accommodations that have been provided.
- 7. Workers Compensation Coordinator will meet with the employee as needed to review the progress of their RTW plan, and reinstate them to their initial position in which they were employed when it is acceptable to do so as per a re-evaluation and updated FAF provided by a licensed medical practitioner.
- 8. Failure to comply with the above and legislated procedural requirements will result in WSIB penalization as outlined under the non-cooperation clause of this policy.

---

## 6. ACCOMMODATION & RE-EMPLOYMENT OBLIGATION

---

### 6.1 Accommodation

Employers have a duty to accommodate the needs of the worker up to the extent of undue hardship. This duty to accommodate is inclusive of the employer modifying the work and/or workplace in order to support an employee in fulfilling the requirements of their job related duties. Therefore, the employer has a duty to re-employ as set out in the WSIB act, the Ontario Human Rights Act, AODA, and any applicable Construction Regulations/legislation.

The worker's accommodation requirements may be either temporary or permanent. At all times, all parties must comply with Human Rights legislation and associated laws.

The Ontario Human Rights Code guarantees equal access to employment opportunities to any person with a disability (work related or non-work related). Therefore, Priestly Demolition Inc. will attempt to provide reasonable accommodation to any workers who have been injured or who acquired an illness up to the point of undue hardship.

Employers have a duty to re-employ if:

- The employee has been unable to work (this includes unable to work their total number of hours, being absent from work, or requiring a job with decreased pay because of his/her injuries) because of the work related injury;
- The worker was continuously employed (does not include strikes, lock-outs, sabbaticals, sick leaves, leaves of absence, vacation, layoffs of less than 3 months or a layoff of more than 3 months if a recall date was given) for at least a year with the employer; and
- The employer regularly employs 20 or more employees (as of the date of the injury and only including the workers whose earnings are reported to WSIB for premium purposes).

### 6.2 Re-Employment Obligation

# Return to Work and Re-employment

## Standard | S017



Where the employee is able to perform the stated duties, Priestly Demolition Inc. will offer the worker first chance to accept the suitable position.

The employer must offer the worker the job that is the most comparable with their position pre-injury and provided the employee is physically able to perform the work (i.e. if the worker initially accepts another position upon their Return to Work, if a position becomes available in the future, the employee would still have first refusal).

This continues until either the second anniversary of the date of injury or one year past the time that the worker is physically able to perform their pre-injury duties or the date

In the case of a contract worker, Priestly Demolition Inc. will re-employ the worker for the duration of their contract.

If the employee voluntarily leaves their position or the company, all re-employment duties are nullified.

When appropriate work for the injured employee is found, and conditional upon the physician giving clearance for work, a written job offer letter will be prepared by Priestly Demolition Inc. and mailed to the employee. The letter will note the medical clearance, start date, hours, wage, duration and location of the work assignment. The employee will be asked to sign the bottom of the letter indicating acceptance or refusal of the job offer and to return the letter to workers Compensation Coordinator.

---

## 7. WORK REINTEGRATION

---

Work Reintegration is a process that begins as soon as the employer is aware of a work related injury or illness.

The Work Reintegration process must continue throughout the recovery period and must be adapted to each individual employee and situation.

Work Reintegration is available for both injured employees and employees struck by an occupational illness. In the case of an illness, the Work Reintegration program will commence once the employee is functionally fit to report for work.

Work Reintegration should include goals and timelines for recovery.

Information in the Work Reintegration program should be gathered from the employee, employer, doctor(s) and WSIB contacts. The program must be shared between these parties as needed.

Statutory requirements for the Work Reintegration program include the values of co-operation (between all parties) and re-employment for the employee.

In the event that a suitable Return to Work/Work Reintegration assignment cannot be found, Priestly Demolition Inc. is committed to the retraining of the employee in an alternative position that is deemed suitable.

Priestly Demolition Inc. will consult with the WSIB for a suitable position and provide all relevant information to the WSIB as to keep the worker informed of the details surrounding their reintegration to provide them with say in their re-assignment where possible.

The Work Reintegration program is not limited to employees who have been absent from their workplace. It also applies to employees who have remained at work, but have had accommodations created for them during their recovery period.

The Work Reintegration program will be required until the employee returns to their pre-injury position or the employee is awarded damages for any loss of earnings because of being re-assigned positions (i.e. a lesser wage).

In any cases where the employer and/or employee does not meet the stated requirements for the Work Reintegration program, the WSIB may reduce or suspend the employee's benefits OR levy a monetary penalty on the employer.

Employers and employees may rely on the WSIB for any support required in the Work Reintegration period.

In keeping with their Guiding Principles, the WSIB will schedule a meeting with the involved parties at a date that is not later than 12 weeks following the employee's date of injury (should the employee have not returned to work in any capacity).

# Return to Work and Re-employment

## Standard | S017



In a case where the employee and Priestly Demolition Inc. are having difficulty with an appropriate Return to Work Program, the WSIB will provide dispute resolution to help and facilitate communication.

In addition, the WSIB has additional services available including, but not exclusive of, proactive education, case management support, accommodation assistance and disability management counselling.

---

## 8. PENALTIES FOR NON-COOPERATION

---

The worker may be subject to penalties for non-cooperation by the WSIB. The employer may not penalize the worker. The guidelines for the penalties include:

1. Initial penalty: reducing the worker's wage loss benefits by 50% beginning from the date that the written notice comes into effect until the 14<sup>th</sup> day following the written notice or until the worker begins to cooperate, whichever is sooner.
2. Full penalty: If the worker non-cooperation continues past the fourteenth day, the WSIB will completely suspend the worker's wage loss benefits.
3. Additional penalties may apply including a reduction in the amount of the payment that the employee would have received if they had been capable of performing the work.

The employer may also be subject to penalties from the WSIB and these may include:

1. An initial penalty of 50% of wage loss benefits to the worker. This will continue until the fourteenth calendar day following the notice given by the WSIB or until the employer starts to co-operate, whichever is sooner.
2. Full penalty: If the employer's non-cooperation continues past the fourteen days following the day of the notice, then the additional penalty will be 100% of the cost of the wage loss benefits payable to the worker and 100% of the costs associated with providing suitable work for the employee.
3. The full penalties will continue until the date that the employer starts to co-operate once more; the date that no further wage loss benefits are payable; or 12 months pass following the date of the written notice.

---

## 9. DISPUTE RESOLUTION

---

After Priestly Demolition Inc. has made an offer to the employee of a position, the following steps are to be taken if the employee disagrees with the assessment:

1. The worker must notify the employer that the offered position is unsuitable and detail the reasons why;
2. The employer must consider the reasons and will attempt to implement further accommodations (if possible);
3. In the event that the above step did not resolve the issue, both Priestly Demolition Inc. and the employee must inform the WSIB and provide all necessary information.

If an agreement does not appear forthcoming, the WSIB will assist the parties in a resolution and/or will make the determination as to the suitability of the work offered.

In the event that the position is found to not be suitable, WSIB will continue to pay the worker their wage loss benefits so long as the employee continues to co-operate with all involved parties. If the position is found to be suitable, the WSIB will immediately verbally inform both parties of the decision; adjust the worker's wage loss benefits; and confirm the decision in writing.

---

## 10. SUITABLE OCCUPATION

---

### 10.1 Suitable Occupation

# Return to Work and Re-employment

## Standard | S017



The following are guidelines provided by the WSIB to aid in determining a suitable occupation for the injured worker:

Priestly Demolition Inc. will co-operate with the WSIB in attempting to maintain the employment relationship with the injured worker by providing suitable work.

The worker is able to provide meaningful input and a choice (where possible) in identifying a suitable occupation for himself/herself.

In the effort to re-integrate the worker, work suitability, availability and cost structures will be considered.

The suitable occupation report will have taken into consideration:

- The worker's functional abilities;
- The worker's employment-related aptitudes, abilities and interests;
- The jobs available (through placement, accommodation or those that require training);
- Labour market trends (including if the employee can secure work in another company); and
- Any pre-existing conditions a worker has (as outlined by Human Rights' Legislation prohibiting discriminatory actions against a person with a disability).
- If a suitable occupation is determined by the WSIB, and the worker has the requisite skills, the WSIB may refer the employee to job placement support services and/or a job search-training program.
- If a suitable occupation is found with the pre-injury employer, the WSIB will aid both Priestly Demolition Inc. and the worker, in establishing a Work Transition Plan.
- If the suitable occupation is with a new employer, the WSIB will confer with the worker and develop a Work transition plan with placement services.

Different possibilities for suitable occupation include:

- With the pre-injury employer in the same area (not limited to a town but also considers commuting distances). The WSIB considers the employee's impairment and the expected travel requirements;
- With the pre-injury employer in a surrounding area where a commute is possible;
- With a new employer in the same area; or
- With a new employer in a broad geographical area (an area as large as necessary that offers suitable occupation).

If a suitable occupation cannot be found in the worker's geographical region, a relocation plan may be considered.

### 10.2 Enhanced Work Transition Plans

The WSIB and the parties involved may consider a suitable plan where the cost may be slightly higher financially, but would guarantee a better chance of long-term success. The enhanced work transition plan may be available to any Priestly Demolition Inc. employees injured at work between the ages of 15 and 24.

This does not include employees who are students, learners or apprentices; who have permanent work restrictions preventing them from returning to their pre-injury work; or had low pre-injury earnings.

### 10.3 Part Time Employees

A part time worker pre-injury will not be required to work full time hours under the terms of the suitable occupation plan. The WSIB may support a part time employee if they desire to seek full time employment as long as they are not precluded from the occupation due to impairment.

Where a worker, pre-injury, was working full time hours but is unable to continue to work full time hours because of their injury, a part time suitable occupation position may be considered. Part time hours are also feasible in the case where a worker is receiving retraining for another suitable occupation.

---

## 11. TERMINATION PROCEDURES

---

In the case of a termination process within six months of an injury involving a worker previously injured, the employee (within a three-month period after the termination) may request that the WSIB investigate non-compliance. If the employee makes the request after three months, the WSIB is not required to investigate but can take the initiative to investigate at any time.

The employer must show the WSIB the justification for the termination of the employee within six months of their re-employment or it is assumed that the employer is non-cooperating.

---

## 12. SUCCESSOR EMPLOYERS

---

Should the original workplace of the worker injured be sold or transferred to another entity, if it is the same legal entity after the completion of the sale or transfer, all re-employment obligations continue. However, if it is a separate entity, generally any sort of re-employment obligation does not exist for the new employer.

In the case of a termination prior to the re-employment, the WSIB will investigate to determine whether the injury had a bearing on the termination.

---

## 13. REFERENCES AND SUPPORTING DOCUMENTS

---

### 13.1 References

- a. Ontario Occupational Health and Safety Act (OHSA)
- b. Workplace Safety & Insurance Board ([www.wsib.on.ca](http://www.wsib.on.ca)) (WSIB)
- c. Ontario Human Rights Act (OHRA)
- d. Canada Human Rights Code (CHRC)
- e. Accessibility for Ontarians with Disabilities Act (AODA)
- f. Personal Information Protection and Electronic Documents Act (PIPEDA)

### 13.2 Supporting Documents

- a. Accident/ Incident Investigation report (online and hard copy)
- b. Form 6 (Worker's Report of Injury/Disease)
- c. Form 7 (Employer's Report of Injury/Disease)
- d. Form 8 (Health Professional's Report)
- e. FAF (Functional Abilities Form)
- f. Letter of Proposed Work Reintegration Plan

# Return to Work and Re-employment Standard | S017



---

## 14. DEFINITIONS

---

Should	A requirement.
WSIB	Workplace Safety & Insurance Board

---

## **1. OBJECTIVE**

---

To define the minimum requirements for WHMIS 2015

---

## **2. SCOPE AND APPLICABILITY**

---

This Standard shall be applied to all Company personnel, contractors and their subcontractors. Contractors may with management approval, however, utilize their own standards and procedures in so far as the requirements of their standards are at least equivalent to those of this standard.

---

## **3. RESPONSIBILITIES**

---

The implementation of this Standard is the responsibility of Company senior management.

Company's managers are responsible for the application of, and compliance with, this Standard at work locations where they have operational responsibilities.

Contractors are responsible for their personnel, and their subcontractor's personnel, compliance with this Standard and / or other standard as agreed per Section 2 above.

Supervisors are responsible for the day-to-day application of this Standard.

All company personnel have a responsibility to comply with this standard.

All personnel have a duty of care, to their work team and others in relation to the application and maintenance of this standard, for work they, their work team or others undertake.

---

## **4. REQUIREMENTS**

---

### **4.1 General**

On February 11, 2015, the Government of Canada published Part II the *Hazardous Products Regulations* (HPR), which modified the Workplace Hazardous Materials Information System (WHMIS) 1988 to incorporate the Globally Harmonized System of Classification and Labelling of Chemicals (GHS) for workplace chemicals. This modified WHMIS is referred to as WHMIS 2015. The old *Controlled Products Regulations* (CPR) and the Ingredient Disclosure List have been repealed.

### **4.2 Education and Training**

All personnel will have WHMIS 2015 training. This includes all workers who work with or near hazardous products.

The training will need to be refreshed on an annual basis

### **4.3 Labels**

Supplier labels must be affixed to the original containers of hazardous products.

- i. Supplier labels must be in both official languages of Canada (English and French). They may be bilingual (as one label), or available as two labels (one each in English and French). Providing a supplier label in just English or French would not be considered to be in compliance.
- ii. The supplier label must include the following information:
- iii. Product identifier – the brand name, chemical name, common name, generic name or trade name of the hazardous product.
- iv. Initial supplier identifier – the name, address and telephone number of either the Canadian manufacturer or the Canadian importer\*.
- v. Pictogram(s) – hazard symbol within a red "square set on one of its points".

# WHMIS 2015 (GHS)

## Standard | PDI HSE – S018



- vi. Signal word – a word used to alert the reader to a potential hazard and to indicate the severity of the hazard.
- vii. Hazard statement(s) – standardized phrases which describe the nature of the hazard posed by a hazardous product.
- viii. Precautionary statement(s) – standardized phrases that describe measures to be taken to minimize or prevent adverse effects resulting from exposure to a hazardous product or resulting from improper handling or storage of a hazardous product.
- ix. Supplemental label information – some supplemental label information is required based on the classification of the product. For example, the label for a mixture containing ingredients with unknown toxicity in amounts higher than or equal to 1% must include a statement indicating the percent of the ingredient or ingredients with unknown toxicity. Labels may also include supplementary information about precautionary actions, hazards not yet included in the GHS, physical state, or route of exposure. This information must not contradict or detract from the standardized information.

### Pictograms

	<b>Exploding bomb</b> (for explosion or reactivity hazards)		<b>Flame</b> (for fire hazards)		<b>Flame over circle</b> (for oxidizing hazards)
	<b>Gas cylinder</b> (for gases under pressure)		<b>Corrosion</b> (for corrosive damage to metals, as well as skin, eyes)		<b>Skull and Crossbones</b> (can cause death or toxicity with short exposure to small amounts)
	<b>Health hazard</b> (may cause or suspected of causing serious health effects)		<b>Exclamation mark</b> (may cause less serious health effects or damage the ozone layer*)		<b>Environment*</b> (may cause damage to the aquatic environment)
	<b>Biohazardous Infectious Materials</b> (for organisms or toxins that can cause diseases in people or animals)				

\* The GHS system also defines an Environmental hazards group. This group (and its classes) was not adopted in WHMIS 2015. However, you may see the environmental classes listed on labels and Safety Data Sheets (SDSs). Including information about environmental hazards is allowed by WHMIS 2015.

Workplace labels must be affixed to hazardous products that have been transferred from the original container into another container. The following applies to Workplace Labels:

- x. There is no set format for a supplier label.
- xi. Labels must be in English and French. They may be bilingual (as one label), or be presented as two labels (one each in English and French).
- xii. The pictogram, signal word, and hazard statement are to be grouped together,
- xiii. To be clearly and prominently displayed on the container,
- xiv. To be easy to read (e.g., you can see it easily without using any item except corrective glasses), and to be in contrast with other information on the product or container

#### **4.4 Inventory**

A chemical inventory shall be maintained of all chemical purchased or otherwise received on site

#### **4.5 Safety Data Sheets**

Safety Data Sheets (SDS) are to be obtained for all hazardous products  
Safety Data Sheets (SDS) are to be made readily available to employees

#### **4.6 Hazards**

All hazards at a company level, project level and daily operations level shall be managed in accordance with the PDI Safety Standard #8: Hazard assessment.

- i. Hazards presented by hazardous substances shall be part of these assessment

The Globally Harmonized System of Classification and Labelling of Chemicals (GHS) includes three types of hazard classes:

- ii. Physical hazard classes, which represent hazards relating to physical and chemical properties, such as flammability or compressed gases
- iii. Health hazard classes, which represent hazards to health arising from exposure to a substance or mixture, such as acute toxicity or skin sensitization
- iv. Environmental hazard classes (hazardous to the aquatic environment and hazardous to the ozone layer).

---

### **5. ADDITIONAL GUIDANCE**

---

#### **5.1 Review and Evaluation**

WHMIS compliance will form part of the overall workplace inspection process at all applicable sites  
The overall WHMIS program will reviewed on an annual basis, as part of the Annual Safety program review process.

---

### **6. REFERENCES AND SUPPORTING DOCUMENTS**

---

#### **6.1 References**

Workplace Hazardous Materials Information System Regulation (R.R.O. 1990, Regulation 860)

#### **6.2 Supporting Documents**

PDI SWP 001 WHMIS  
PDI Safety Standard 008 Hazard Assessment  
PDI Safety Standard 007 Annual Management Review

---

### **7. DEFINITIONS**

---

Hazardous product	A product, mixture, material or substance that meets the criteria to be classified in one or more of the hazard classes of the HPR.
Recommended	To be considered as part of the documented, local risk assessment process.

# WHMIS 2015 (GHS)

Standard | PDI HSE – S018



Shall	A requirement. The introduction of exceptions to this Standard needs endorsement by senior management.
Should	A requirement. The introduction of exceptions to this Standard needs endorsement by senior management.

---

## 1. OBJECTIVE

---

To define the minimum requirements for fatigue management.

---

## 2. SCOPE AND APPLICABILITY

---

This Standard shall be applied to all Company personnel, contractors and their subcontractors. Contractors may with management approval, however, utilize their own standards and procedures in so far as the requirements of their standards are at least equivalent to those of this standard.

---

## 3. RESPONSIBILITIES

---

The implementation of this Standard is the responsibility of Company senior management.

Company's managers are responsible for the application of, and compliance with, this Standard at work locations where they have operational responsibilities.

Contractors are responsible for their personnel, and their subcontractor's personnel, compliance with this Standard and / or other standard as agreed per Section 2 above.

Supervisors are responsible for the day to day application of this Standard.

All company personnel have a responsibility to comply with this standard.

All personnel have a duty of care, to their work team and others in relation to the application and maintenance of this standard, for work they, their work team or others undertake.

---

## 4. REQUIREMENTS

---

### 4.1 Procedure

- a. Fatigue can be caused by long hours of work, long hours of physical or mental activity, inadequate rest, excessive stress, and combinations of these factors – both on the job and off the job. Although signs of fatigue vary from worker to worker, typical physical signs and symptoms are:
  - Sleepiness, including falling asleep against the individual's will (micro sleeps)
  - Irritability
  - Depression
  - Giddiness
  - Loss of appetite
  - Digestive problems
  - An increased susceptibility to illness
  
- b. In addition to physical signs and symptoms, fatigued workers may have their ability to perform mental and physical tasks impaired. These impairments can take many forms, such as the following:
  - Slowed reactions – physical reaction speed and speed of thought.
  - Incorrect actions – either physical or mental.
  - Flawed logic and judgment and an inability to concentrate.
  - Increases in memory errors, including forgetfulness.
  - Decrease in vigilance.
  - Reduced motivation.

- Increased tendency for risk-taking
- c. Incidents or injuries can be the result of a combination of these factors. Although difficult to measure, fatigue has been identified as having played a significant role in a number of recent transportation and power utility disasters.

### 4.2 Sleep Loss and Sleep Disturbance

- a. Data Most of us have personal experience with some degree of sleep loss and its effects on our ability to function. Research indicates that, on average, workers require 7.5 to 8.5 hours of sleep per day. Workers obtaining less than their required amount of sleep develop a sleep debt that is cumulative.
- b. A single night's shortened sleep period may not have a negative or noticeable effect upon performance the next day. This single night's lost sleep is quite easy to make up during the next sleep period. However, cutting sleep periods short for an extended period of time, such as weeks or months, leads to a condition of chronic sleep deprivation and results in performance defects. Heavy meals, warm rooms, and long periods of driving reveal the presence of sleepiness. In contrast, the behaviors associated with sleepiness – yawning, eye rubbing and head nodding, can be reduced under conditions of high motivation, excitement, and exercise.
- c. Studies have shown that extensive sleep loss can be overcome if short-duration tasks are performed, e.g., tasks usually less than two minutes in length and no more than five minutes in length. Workers are able to “hype” themselves up and perform the task. The ability to sustain such performance decreases significantly, however, as the physical or mental demands of the task increase.
- d. Quality of sleep is as important as quantity. Sleep may be disrupted by the use of prescription drugs, stimulants (such as caffeine), and sleep-related illnesses (such as sleep apnea). Alcohol may help a person fall asleep quickly; however, sleep will be light and disturbed, not deep, and steady. Sleep can also be disrupted by conditions such as noise, light, temperature, or uncomfortable sleep surfaces.

### 4.3 Time of Day and Incidents

- a. The poorest job performance consistently occurs on the night shift and the highest rate of industrial incidents is usually found among shift workers. Catastrophic incidents do not happen at random throughout the day – they are more likely at times when workers are most prone to sleep, between midnight and 6 a.m. and between 1 and 3 p.m.

### 4.4 Health and Safety Issues

- a. Employers must recognize that work outside of the “normal” workday and extended hours of work can lead to fatigue. It is a problem that cannot be dismissed on the basis that it is a “personal problem” – one that the worker will simply learn to deal with. A worker completing a 16-hour work shift may have only 4 or 5 hours for sleep once travel, eating, and social time is taken into account.

### 4.5 Danger Signs

- a. If a worker experience any of these symptoms while driving, the worker should take them as a warning that he/she could fall asleep unintentionally. These symptoms include:
  - i. Eyes close or go out of focus by themselves.
  - ii. Difficulty keeping one's head up.
  - iii. Non-stop yawning.
  - iv. Wandering, disconnected thoughts.
  - v. Cannot remember driving the last few miles.

# Fatigue Management

## Standard | PDI HSE – S019



- vi. Drifting between lanes, tailgating, or missing traffic signs.
  - vii. Jerking the car back into the lane.
  - viii. Drifting off the road and narrowly missing crashing.
- b. If you have even one of these symptoms, you may be in danger of falling asleep. Pull off the road and take a nap.

---

### 5. ADDITIONAL GUIDANCE

---

- a. N/A

---

### 6. REFERENCES AND SUPPORTING DOCUMENTS

---

#### 6.1 References

N/A

#### 6.2 Supporting Documents

N/A

---

### 7. DEFINITIONS

---

Recommended	To be considered as part of the documented, local risk assessment process.
Shall	A requirement. The introduction of exceptions to this Standard needs endorsement by senior management.
Should	A requirement. The introduction of exceptions to this Standard needs endorsement by senior management.

# Refuse Unsafe Work

## Standard | S020



---

### 1. OBJECTIVE

---

To define the minimum requirements for Right to Refuse or to stop work which is unsafe.

---

### 2. SCOPE AND APPLICABILITY

---

This Standard shall be applied to all Company personnel, contractors, and their subcontractors. Contractors may, with management approval, however, utilize their own standards and procedures in so far as the requirements of their standards are at least equivalent to those of this standard.

---

### 3. RESPONSIBILITIES

---

#### Employer

- Our management will ensure this right is communicated to the employees during the orientation process.
- Workers must not be reprimanded for refusing to perform unsafe work.
- Management shall not tolerate any form of retribution or intimidation directed at any individual for exercising their right to refuse unsafe work, provided that the individual follows required procedures.

#### Supervisor

- Ensure the procedure is implemented.
- Investigate and take action to eliminate the danger.
- Ensure that no other worker is assigned to the same work, or equipment, unless:
  - a) the danger has been eliminated
  - b) the worker to be assigned is not exposed to the danger
  - c) the worker assigned is informed of the refusal, the reasons for the refusal and their right to refuse work that presents a danger
- Documenting the work refusals, investigation findings and controls that were implemented.

#### Employee

- Employees should not perform work if they are not adequately trained, equipped, experienced, or conditioned.
  - Employees should understand and practise the right to refuse unsafe work.
  - Report Work refusals immediately to the immediate supervisor stating it is unsafe and the reason for refusal.
  - Employees must stop work and not resume it until the concern has been addressed.
- 

### 4. PRINCIPLE

---

Priestly Demolition Inc. expects all employees / contractors to understand and exercise their right and responsibility to refuse to do unsafe work.

If a worker believes that the assigned work responsibilities are unsafe, that worker has the right to refuse to do the work to protect himself /herself and other workers at the worksite.

A worker can refuse work if,

- i. The physical condition of the workplace or the part in which he or she works or is to work is unsafe.
- ii. The workplace violence is likely to endanger himself or herself; or
- iii. any equipment, machine, device, or thing he or she is to use or operate is likely to endanger himself /herself and other workers at the worksite.

---

## 5. REQUIREMENTS

---

### 5.1 Procedure

To refuse unsafe work, the following shall be utilized as a guideline:

1. The worker considers work to be unsafe.
2. Worker reports refusal to his/her supervisor or employer
3. The worker stays in a safe place.
4. The supervisor must investigate and take action to eliminate the danger. Employer or supervisor investigates in the presence of the worker and the worker safety representative.
5. All work refusal occurrences must be documented including the investigation and action taken. A copy of the report must be provided to the worker.
6. If the issue is resolved, the worker goes back to work.
7. If the worker is not satisfied with the response of the supervisor and feels that the danger still exists, then he/she may contact the local JHSC, who will further investigate the complaint.
8. If the worker believes that the danger still exists, he/ she can file a complaint with a government occupational health and safety officer.
9. The officer will investigate the complaint, and document actions taken in a written report. A copy of the report must be provided to the worker.
10. If the worker is not satisfied with the officer's report and recommendations, he/she must legally return to work but may appeal the report within 30 days.

---

## 6. ADDITIONAL GUIDANCE

---

Examples of unsafe work could include be the following:

- Assigned a task which is not listed in your job description and for which you have not been trained.
- Asked to operate a motor vehicle after you have reported to your supervisor that you are taking prescription medication which can cause drowsiness.
- Directed to work at heights with no fall protection.
- Directed to work in a confined space without a safety standby.
- Directed to work in an H2S environment with no respiratory protection.
- Asked to perform a duty with a chemical for which there is no SDS available.
- Directed to perform work in an explosive atmosphere; or
- Being instructed to enter a trench or excavation for which improper trenching and excavation procedures have been used.

---

## 7. REFERENCES AND SUPPORTING DOCUMENTS

---

### 7.1 References

- a) Ontario Occupational Health and Safety Act (OHSA) Part V: Right to Refuse or Stop Work Where Health or Safety is in Danger
- b) Ontario Occupational Health and Safety Act Part VI: Reprisals by Employer Prohibited

# Refuse Unsafe Work

## Standard | S020



### 7.2 Supporting Documents

- Near Miss and Incident Report (Kissflow Online)
- Workplace Harassment Report Form (Kissflow Online)
- Safety observation report (Kissflow Online)

## 8. DEFINITIONS

Recommended	To be considered as part of the documented, local risk assessment process.
Shall	A requirement. The introduction of exceptions to this Standard needs endorsement by senior management.
Should	A requirement. The introduction of exceptions to this Standard needs endorsement by senior management.
Unsafe work	A danger that is not normal for that occupation. A danger under which a person engaged in that occupation would not normally carry out his / her work. Work normally carried out by the worker, but in the particular circumstances, the danger associated with the work is greater than usual and presents a danger to the health and safety of the worker or others. The work is in contravention of legislation The worker is not adequately trained, equipped, experienced, or conditioned to perform the work.



# Section 3: Safe Work Practices Safe Work Procedures

Note: Original signed documents are available from the head office

Disclaimer: The master of this document is controlled electronically. Printed copies of this document are not controlled. Document users are responsible for ensuring copies are valid prior to use.

Version 2.0  
Last Revised: November 22 2022  
Revised by: HSE Department

The following standards are found in this section:

### 3.1. Activities

- SWP-A01, Company and Site Rules
- SWP-A02, Hot Work
- SWP-A03, Truck Loading & Unloading
- SWP-A04, Fueling Equipment – Diesel and Gasoline
- SWP-A05, Confined Space Procedure
- SWP-A06, Air Gap
- SWP-A07, Working Alone
- SWP-A08, Concrete Cutting
- SWP-A09, Lock-Out/ Tag-Out
- SWP-A10, Wildlife
- SWP-A11, Housekeeping
- SWP-A12, Site Traffic Control
- SWP-A13, Barricades and Guardrails
- SWP-A14, Trenching and Excavations
- SWP-A15, Working at Heights
- SWP-A16, Limits of Approach
- SWP-A17, Office Environment
- SWP-A18, Manual Lifting
- SWP-A19, Fire Protection and Prevention
- SWP-A20, Office Ergonomics
- SWP-A21, Slip, Trip & Fall Prevention
- SWP-A22, Lightning Safety
- SWP-A23, Risk of Violence
- SWP A24, Working at Night
- SWP-A25, Pressurized water

# 2026 Health and Safety Manual

## Health, Safety & Environmental



- SWP-A26, Emergency Response
- SWP-A27, Forest Fire Prevention
- SWP-A28, Structural Demolition
- SWP-A29, Short Service Worker
- SWP-A30, Torching and cutting
- SWP-A31, Driving
- SWP-A32 - Response to Regulatory Inspection Orders
- SWP-A33 – Interior Demolition –Machinery
- SWP-A34, Dropped Objects
- SWP-A35, Tarping Bins

### 3.2. Equipment

- SWP-E01, Manual Hand Tools
- SWP-E02, Powered Hand Tools
- SWP-E03, Defective Tools
- SWP-E04, Crushing and Screening
- SWP-E05, Forklift Operation
- SWP-E06, Warehouse
- SWP-E07, Processing and Sorting Demolition Materials
- SWP-E08, Vehicle Use
- SWP-E09, Elevating Work Platforms
- SWP-E10, Chainsaw Use
- SWP-E11, Compressed Gas Cylinders
- SWP-E12, Ladders
- SWP-E13, Scaffolding
- SWP-E14, Electrical Safety (General)
- SWP-E15, Hoisting and Rigging
- SWP-E16 Safe Use of Table Saws

# 2026 Health and Safety Manual

## Health, Safety & Environmental



- SWP-E17, Heavy Equipment Operation
- SWP-E18, Equipment Assembly and Disassembly
- SWP-E19, Powered Mobile Equipment
- SWP-E20, Shredder Operation
- SWP-E21, Machine Guarding – Rotating Equipment
- SWP-E22, Cranes, Hoists and Lift Trucks
- SWP-E23, MSA Altair 4x Bump Test and Calibration
- SWP-E24, MSA Altair 2x Bump Test and Calibration
- SWP-E25, Knife Safety

### 3.3. Occupational Health

- SWP-O01, WHMIS
- SWP-O02, Cold Stress
- SWP-O03, Hot Stress
- SWP-O04, Noise Exposure
- SWP-O05, Bugs and Insects
- SWP-O06, Vibration
- SWP-O07, Propane
- SWP-O08, Dust (General)
- SWP-O09, Chemical Spill
- SWP-O10, Asbestos – Type 1, 2 & 3 Operations
  - SWP-O10.1, Asbestos – Type 1 Operations
  - SWP-O10.2, Asbestos – Type 2 Operations
  - SWP-O10.3, Asbestos – Type 3 Operations
- SWP-O11, Chemical & Hazardous Materials – Handling and Storage
- SWP-O12, Carbon Monoxide (CO)
- SWP-O13, Sharps
- SWP-O14, Animal Droppings – Birds & Bats
- SWP-O15, Ultra-Violet Radiation

# 2026 Health and Safety Manual

## Health, Safety & Environmental



- SWP-O16, Lead
- SWP-O17, Silica
- SWP-O18, Mould
- SWP-O19, COVID-19 Prevention
- SWP-O20, Chemical and Biological Hazards
- SWP-O21, PCB Removal



# Company and Site Rules

It is the expectation that all company employees will follow the company rules as defined below.



Version 1.0  
Last Revised: Sept 14 2022  
Revised by: HSE Department

## Company Safety Rules

It is expected that all company employees will follow the company rules as defined below.

**Be Safe**

- You have the right to refuse work you feel is unsafe at any time.
- If you see something, say something. Any hazard, incident, accident, spill, or near miss must be reported to your supervisor immediately.
- Wear and use appropriate PPE at all times.

**Be Prepared**

- Plan the work and work the plan.
- Be aware of the location of fire extinguishers, first aid kits, emergency exits, and the muster point.
- Have all of the proper equipment to do the work.
- Follow the company policies, procedures, and programs.
- Know the hazards and risks of each job.

**Be Engaged**

- Be Aware- pay attention to what is happening around you at all times.
- Focus on the task at hand, do not be distracted.
- Ask questions any time you are unsure.
- Come to work free from the influence of intoxicants, narcotics, or alcohol.

**Be Respectful**

- Priestly is dedicated to an environment free from harassment – speak to and treat colleagues, clients, vendors, and visitors with courtesy.
- Cooperate with other team members and trades.
- Help each other out.
- Be reliable – Arrive for work on time, don't leave early, and meet deadlines.

### Consequences of Rule Breaking

Failure to comply with the Company Safety Rules will result in the application of our Progressive Discipline Policy.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Company and Site Rules

It is the expectation that all company employees will follow the company rules as defined below.



Version 1.0  
Last Revised: Sept 14 2022  
Revised by: HSE Department

## Critical Site Safety Rules



**Job Hazard Assessments**

- Identify hazards.
- Confirm hazards are controlled.
- Stop and reassess if conditions change.



**Working at Heights**

- Inspect all fall protection equipment before use.
- Be trained on the equipment.



**Fit For Duty**

- Be in physical, physiological, and psychological condition to perform your tasks safely.



**Personal Protective Equipment**

- Properly use, maintain and store PPE.
- Minimum PPE for site is CSA approved boots and safety glasses.



**Heavy Equipment**

- Perform pre-work equipment checks.
- Avoid blind spots.
- Maintain constant communication.



**Energy Isolation**

- Identify all energy sources.
- Confirm zero energy.

### Consequences of Rule Breaking

All incidents are to be reported and will be investigated.  
Failure to comply with any Critical Site Safety Rule will result in the application of our Progressive Discipline Policy.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Hot Work

Safe Work Practice Number

SWP-A02

Potential Hazards Present	Required Personal Protective Equipment <small>* may be required based on risk – see CARS form</small>			
Explosion Fire Compressed gas Airborne contaminants Welding flash Flying debris		<b>Safety Glasses with Side Shields</b>		<b>Fire Extinguisher</b>
		<b>Face Shield</b>		<b>Hard Hat*</b>
		<b>Steel Toed Boots</b>		<b>Hand Protection</b>
		<b>Fire Resistant Clothing</b>		<b>Respiratory Protection*</b>

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ Wear approved PPE as noted</li> <li>✓ Obtain a Hot Work Permit, where required, such as inside or adjacent to an occupied building, before commencing work</li> <li>✓ Perform hot work in a safe location, with any fire hazards removed or covered</li> <li>✓ Assign dedicated personnel for fire watch to guard against fire, while hot work is being performed and 30 min following.</li> <li>✓ After hot work is completed, maintain surveillance of the area for at least two hours to detect any potential fire hazards.</li> <li>✓ Have fire-extinguishing equipment readily available</li> <li>✓ Ensure adequate ventilation from welding and cutting fumes</li> <li>✓ Always protect your eyes from welding flash, use a protective screen to protect others in the vicinity</li> <li>✓ Keep area clear of flammable and combustible materials within 10 meters or additional protection will be needed</li> <li>✓ Inspect all equipment before use</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not tamper with safety features on tools</li> <li>✗ Do not perform operations without a respirator, when ventilation is not adequate</li> <li>✗ Do not perform work unless skin is adequately protected</li> <li>✗ Do not allow non-essential employees in the work area</li> <li>✗ Do not use equipment unless you are trained to do so</li> <li>✗ Do not allow unprotected workers in the Hot Work Area</li> <li>✗ Do not perform cutting, grinding, or welding on a closed systems such as piping and tanks unless it is de-energized / purged of flammables</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	October 23 <sup>rd</sup> 2025	2



# Hot Work

<ul style="list-style-type: none"> <li>✓ Use air quality monitoring for confined or restricted space or where ventilation is not adequate</li> <li>✓ Wear respiratory protection if air quality is not adequate</li> <li>✓ Ensure the safe storage and handling of compressed gas cylinders (see SWP –E11 Compressed Gas Cylinders)</li> </ul>	
--	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Hot Work: Any activity that can produce enough heat to produce a potential ignition source including all spark producing activities.
- Ensure that manufacturer’s instructions for equipment are present and followed at all times
- O. Reg. 213-91, Section 343, 122-124
- [https://www.labour.gov.on.ca/english/hs/pubs/confined/cs\\_14.php](https://www.labour.gov.on.ca/english/hs/pubs/confined/cs_14.php)
- Customer Site Specific Rules and Procedures.
- Ontario Fire Code - <https://www.ontario.ca/laws/regulation/070213>
- PDI SWP-E11 Compressed Gas Cylinders
- Hot Work Permit
- Fire Watch Log

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	October 23 <sup>rd</sup> 2025	2



# Safe Work Practice

# Hot Work

Safe Work Practice Number

SWP-A02

Version 1.0  
Last Revised: July 04 2022  
Revised by: HSE Department



## Hot Work Permit

This permit must be posted in the work area and a copy in the Site Management Office

GENERAL INFORMATION		
Permit Number:	Area:	Date:
Scope of Work:		

HAZARDS   Check off any items that apply			
Prior To Start			
YES <input type="checkbox"/>	NO <input type="checkbox"/>	N/A <input type="checkbox"/>	Cutting, welding or grinding equipment in good repair
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Is suitable non combustible clothing being worn that is fit for the task being performed
Within the Work Area			
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Has combustible materials, flammable liquids, dusts or lint present been removed
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Can combustible material be protected with covers, guards or metal shields
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Has work area been swept clean of any combustibles and or leaves/vegetation removed
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Have combustibles been wet down, covered with sand, metal or other shields
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Are all wall and floor openings covered
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Are fire retardant drapes suspended beneath work to collect sparks needed
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Are barricades, sign covers, guards and shields in place
Work on Walls and Ceilings			
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Verify construction and that any insulation present is non-combustible
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Move any combustibles present on opposite side of wall clear of the intended work area
Work on Enclosed Equipment   Tanks, Containers, Ducts, Dust Collectors, etc.			
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Confined space Entry Permit required ( if yes, refer to Health and Safety Manual – Working in Confined Space)
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Enclosed Equipment purged of flammable vapors
Fire Watch			
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	To be provided during the entire operation
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Supplied with small hose line or extinguisher
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Trained in the use of equipment and raising the fire alarm

AUTHORIZATION		
I have inspected the work area and am satisfied that all preparatory work has been completed, and the area is in a safe condition for hot work to be carried out, provided the precautions as stated are complied with.		
Workers Name:	Signature:	Date:
Responsible Person Name:	Signature:	Date:
Fire Watch:	Signature:	Date:

COMPLETION OF WORK					
<input type="checkbox"/>	NO <input type="checkbox"/>	N/A <input type="checkbox"/>	Area washed down – no hot spots	START TIME	STOP TIME
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Final Check of area 45 minutes after completion of work.		
All Work associated with this permit has been completed. I have inspection the area/plant and am satisfied that it is safe and ready to return to service. No further work is permitted.					
Worker Signature:			Responsible Person Signature:		

**NO HOT WORK TO TAKE PLACE LESS THAN 45 MINUTES BEFORE VACATING SITE**

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	October 23 <sup>rd</sup> 2025	2





Safe Work Practice

# Truck Loading & Unloading

Safe Work Practice Number

SWP-03

Potential Hazards Present	Required Personal Protective Equipment <small>* may be required based on risk – see CARS form</small>	
Pinch Points Equipment Rollover Struck by Ergonomics Slips / Trips Visibility		
		
		

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ Wear approved PPE as noted</li> <li>✓ Park the vehicle on level, stable ground</li> <li>✓ Use 3 points of contact when entering or exiting the vehicle</li> <li>✓ Make sure trailer and ramp are wide enough for equipment</li> <li>✓ Ensure capacity of trailer is sufficient for the equipment to be transported</li> <li>✓ Ensure compliance with all applicable road weight restrictions</li> <li>✓ Make sure you are trained to operate the equipment</li> <li>✓ Ensure load is properly secured</li> <li>✓ Keep all non-essential personnel away from the work area</li> <li>✓ Be aware of other vehicles in the area</li> <li>✓ Use a signaler if view is obstructed</li> <li>✓ Use provided seatbelts provided on equipment when in motion</li> <li>✓ Always check for overhead hazard</li> <li>✓ Ensure correct body position when releasing tension on chains or straps</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not use damaged equipment or tie downs</li> <li>✗ Do not tamper with safety features</li> <li>✗ Do not drive with equipment in the raised position</li> <li>✗ Do not use tie down equipment not adequate for the load</li> <li>✗ Do not drive with unsecured tools or equipment</li> <li>✗ Do not operate equipment if view of intended path of travel is obstructed</li> <li>✗ Do not manually lift loads that are too heavy</li> <li>✗ Do not exit truck without proper PPE</li> </ul>

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Truck Loading & Unloading

Safe Work Practice Number

SWP-03

- Ensure that manufacturer's instructions are present and followed at all times
- O. Reg. 213-91, Section 93-104
- <http://www.mto.gov.on.ca/english/trucks/pdfs/commerical-vechicle-operators-safety-manual.pdf>
- Customer Site Specific Rules and Procedures.

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Fueling Equipment Diesel and Gasoline

Safe Work Practice Number

SWP-A04

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk – see CARS form	
Fire Explosion Vapors / fumes	 <b>Gloves</b>	 <b>High visibility vest&amp;</b>
	 <b>Safety Footwear</b>	 <b>Safety glasses</b>

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ Review the SDS</li> <li>✓ Practice caution with gas vapors which are highly explosive</li> <li>✓ Know the type of fuel the vehicle requires and check to ensure that the proper fuel pump has been selected before filling the vehicle</li> <li>✓ Ensure that the fueling area is well ventilated</li> <li>✓ Check that the vehicle’s engine is shut off prior to refueling</li> <li>✓ Ensure that cell phones are turned off when fueling the vehicle</li> <li>✓ Maintain contact with the nozzle during refueling from start to finish to avoid creating static electricity</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not park vehicles closer than three feet to the fuel pump</li> <li>✗ Do not become distracted when fueling a vehicles; distraction can cause spillage on either the person, the vehicle or the ground</li> <li>✗ Do not “Top Off” fuel tanks</li> <li>✗ Do not smoke or have any type of open flame in the vehicle, near or within the vicinity of the vehicle while it is being refueled</li> <li>✗ Do not refuel a vehicle if there is any source of ignition in the immediate vicinity</li> <li>✗ Do not leave the vehicle unattended when refueling and avoid overfilling the tank</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Fueling Equipment Diesel and Gasoline

Safe Work Practice Number

SWP-A04

<ul style="list-style-type: none"> <li>✓ Ensure the nozzle is returned to the pump when refueling the vehicle is complete</li> <li>✓ Replace the fuel cap on the vehicle and ensure it is secured properly</li> <li>✓ Conduct cleanups of any fuel spills immediately after discovery.</li> <li>✓ Absorbent spill clean-up materials and spill kits shall be available in fueling areas and on mobile fueling vehicles and shall be disposed of properly after use.</li> <li>✓ Nozzles used in vehicle and equipment fueling shall be equipped with an automatic shut-off to prevent overfill.</li> <li>✓ Mobile fueling shall be minimized. Whenever practical, vehicles and equipment shall be transported to the designated fueling area in the facilities area.</li> <li>✓ Use only approved portable containers (e.g., CSA or ULC approved).</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not fill gas containers in the back of vehicles, but instead, ensure they are placed on level ground prior to filling</li> <li>✗ Do not use the gas cap or other objects to hold the fuel delivery nozzle open</li> <li>✗ Do not siphon gasoline by mouth. It is harmful and may cause death if swallowed. If ingested, do not induce vomiting. Get medical help immediately.</li> </ul>
--	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Ontario Reg. 213/91: Construction Projects
- Ontario Regulation 1990, Reg. 851: Industrial Establishments
- CSA B376-M (R2003) "Portable containers for Gasoline and Other Petroleum Fuels" (up to 5 gallons/25 litres)
- SDS: Gasoline & Diesel fuel

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Confined Space Procedure

Potential Hazards Present	Required Safety Devices: *as required on the hazard assessment	
<ul style="list-style-type: none"> <li>• Flammables and toxins</li> <li>• Pinch points</li> <li>• Overhead loads</li> <li>• Awkward positions</li> <li>• Noise</li> <li>• Chemicals exposure</li> <li>• Mechanical energy</li> <li>• Extreme temperatures</li> <li>• Oxygen deficiency or enrichment</li> </ul>	 <b>Fire Extinguisher*</b>	 <b>Communication Device</b>
	 <b>Safety Boots</b>	 <b>Hard Hat*</b>
	 <b>Gloves*</b>	 <b>Safety Harness</b>
		 <b>Respiratory Protection*</b>

## Required Materials & Equipment

Air monitoring equipment

## Procedure

<b>Before You Start</b>	<ol style="list-style-type: none"> <li><b>Is it a Confined Spaces(s)?</b> <ul style="list-style-type: none"> <li>“confined space” means a fully or partially enclosed space,               <ul style="list-style-type: none"> <li>(a) that is not both designed and constructed for continuous human occupancy, <u>and</u></li> <li>(b) in which atmospheric hazards may occur because of its construction, location or contents or because of work that is done in it.</li> </ul> </li> <li><u>If you have a space that is fully or partially enclosed, the two conditions - (a) and (b) above – must both apply before the space can be considered a "confined space".</u></li> </ul> </li> </ol>
-------------------------	---

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Confined Space Procedure

	<p><b>2. Is there multi-employer involvement?</b></p> <ul style="list-style-type: none"> <li>If the workers of more than one employer perform work in the same confined space, before any worker enters the confined space or begins related work with respect to the confined space, the constructor shall prepare a co-ordination document to ensure that the duties imposed on employers are performed in a way that protects the health and safety of all workers who perform work in the confined space or related work with respect to the confined space</li> </ul> <p><b>3. Complete Hazard Assessment</b></p> <ul style="list-style-type: none"> <li>Before any confined space entry (CSE) work can be performed, the Supervisor or other person with a knowledge, skills, experience in assessing confined spaces will: <ul style="list-style-type: none"> <li>Identify the hazards that may exist due to the design, construction, location or use of contents of the space;</li> <li>Identify any hazards that may develop while work is done inside the confined space (e.g. welding, cleaning, etc.). Additional or associated hazards include: <ul style="list-style-type: none"> <li>Toxic atmospheres</li> <li>Oxygen deficiency or enrichment</li> <li>Engulfment</li> <li>Mechanical, electrical or hydraulic hazards</li> <li>Temperature extremes</li> <li>Noise</li> <li>Access/egress</li> </ul> </li> </ul> </li> </ul>
--	---

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1




# Confined Space Procedure

	<ul style="list-style-type: none"> <li>▪ Flammable, combustible or explosive atmospheres</li> <li>○ Specify the personal proactive equipment (PPE) required to preform the work</li> <li>○ Specify the type and frequency of inspection and tests necessary to determine the likelihood of work exposure to the identified hazards</li> <li>○ The Hazard Assessment document shall be signed and dated by the person conducting the assessment.</li> </ul> <p><b>4. Complete the Confined Space Entry Permit / Plan</b></p> <ul style="list-style-type: none"> <li>• The Direct Supervisor (must be competent person) or their designate is responsible for the CSE Permit, (this may change based on location).</li> <li>• A separate entry permit is required before each confined space entry. A CSE Permit is required for all work performed within a confined space.</li> <li>• The Supervisor shall ensure that every worker who enters a confined space or conducts related work follows the plan.</li> <li>• The Supervisor shall ensure that the appropriate acceptable atmospheric levels are noted on the permit to facilitate proper interpretation of air testing results.</li> <li>• The Supervisor shall sign the permit to verify the requirements of the relevant plan have been met.</li> <li>• The permit shall be closed at the end of each shift.</li> </ul> <p><b>5. Confirm Training</b></p> <ul style="list-style-type: none"> <li>• Managers and Supervisors are responsible for identifying employees who require training.</li> </ul>
--	---

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Confined Space Procedure



- Ensure that every worker who enters a confined space or who performs related work receives adequate training to perform the work safely, in accordance with the relevant plan. Training will include, but not necessarily be limited to:
    - the recognition of hazards associated with confined spaces; and
    - safe work practices for working in confined spaces and for performing related work.
    - Documents records of CSE training for each CSE worker must be kept on file and available for review
  - The CSE Worker is not allowed to participate in confined space entry work if their training certificate has expired or is not available
- 6. Ensure an attendant is in place**
- Whenever a worker is to enter a confined space, the ensure that an assigned attendant,
    - is stationed outside and near,
    - the entrance to the confined space, or
    - if there are two or more entrances, the one that will best allow the attendant to perform his or her duties under subsection
    - is in constant communication with all workers inside the confined space, using the means of communication described in the relevant plan
    - is provided with a device for summoning an adequate rescue response.
  - The attendant shall not enter the confined space at any time and shall, in accordance with the relevant plan,
    - monitor the safety of the worker inside;
    - provide assistance to him or her

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Confined Space Procedure

	<ul style="list-style-type: none"> <li>○ summon an adequate rescue response if require</li> </ul> <p><b>7. Confirm On-site Rescue Procedures and Rescue Equipment</b></p> <ul style="list-style-type: none"> <li>● The Supervisor shall ensure that no worker enters a confined space until an adequate number of persons trained in the rescue procedures are available on-site, for immediate implementation of the rescue procedures. The person(s) must be trained/competed in:             <ul style="list-style-type: none"> <li>○ The on-site rescue procedures,</li> <li>○ First aid and CPR, and</li> <li>○ The use of the rescue equipment required by the relevant plan.</li> </ul> </li> <li>● Rescue equipment shall be inspected by a person with adequate knowledge, training and experience as often as is necessary to ensure it is in good working order.</li> <li>● A written record of the inspection shall be maintained at the site where it is normally stored and on the applicable permit.</li> <li>● Methods of communication that are appropriate for the hazards identified in the assessment will be readily available for workers to communicate with the attendant</li> <li>● To facilitate non-entry rescue, retrieval systems/methods shall be used whenever an authorized entrant enters a permit space, unless the retrieval equipment would increase the overall risk of entry or would not contribute to the rescue of the entrant.</li> </ul>
--	---

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1




# Confined Space Procedure

	<ul style="list-style-type: none"> <li>• In the event of an emergency, the attendant shall attempt to retrieve the entrant by way of the entrant’s lifeline/retrieval system.</li> <li>• Retrieval systems shall meet the following requirements: <ul style="list-style-type: none"> <li>○ Each authorized entrant shall use a full body harness with shoulder D-Rings.</li> <li>○ When practical, a Tripod connected to a mechanical device will be utilize outside the permit space in such a manner that rescue can begin as soon as rescue is necessary; or</li> <li>○ The other end of a lifeline shall be attached to a mechanical device or fixed point outside the permit space</li> </ul> </li> <li>• Only trained individuals shall attempt a rescue from inside a confined space area and they must be wearing a self-contained breathing apparatus or a supplied air respirator and be connected to a lifeline if entry into the confined space is required.</li> <li>• During the CSE work, the attendant is responsible for controlling access to the space.</li> <li>• Only those who are listed as entrants on the permit may enter the space.</li> <li>• Workers must leave the confined space immediately in the case of any of the following: <ul style="list-style-type: none"> <li>○ If they feel ill, light-headed, dizzy or any pain;</li> <li>○ If condition within the confined space change;</li> <li>○ If the attendant is unable to perform the attendant’s duties</li> </ul> </li> </ul>
--	---

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Confined Space Procedure



- If communication is disrupted or disabled.
- 8. Confirm Isolation and Lockout**
- Prior to confined space entry, the supervisor must confirm that all hazards presented by any energy, gaseous liquid or free-flowing solid material must have adequate controls in place such as:
    - Locking out electrical sources, preferably at disconnect switches remote from the equipment;
    - Blanking and bleeding water, steam, pneumatic and hydraulic lines
    - Disconnecting belt and chain drives and mechanical linkages on shaft-driven equipment where possible; and
    - Securing mechanical moving parts within confined spaces with latches, chains, chocks, blocks or other devices.
    - Blanks/blinds should be installed as close as possible to the confined space. If the confined space contains any toxic gas, respiratory protection equipment must be worn while the blanks/blinds are being installed.
- 9. Ensure Proper Means of Entry and Exit**
- Prior to any worker entering the confined space, the supervisor must ensure that there is an adequate means for both entering and exiting the space.
  - Ladders or other suitable means should be provided where necessary and should be well secured.
  - Doors or hinged covers to confined spaces should be equipped such that they can be locked in the open position.
  - The size of access and egress areas should be considered when choosing personal protective equipment to be used by the workers, and also when

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Confined Space Procedure

	<p>setting up rescue procedures and choosing rescue workers' personal protective equipment and rescue equipment.</p> <p><b>10. Prevent Unauthorized Entry</b></p> <ul style="list-style-type: none"> <li>• If there is the possibility of unauthorized entry into a confined space, the Entry Supervisor shall ensure that each entrance to the space shall be: <ul style="list-style-type: none"> <li>○ adequately secured against unauthorized entry; or</li> <li>○ has been provided with adequate barricades, adequate warning signs regarding unauthorized entry, or both.</li> </ul> </li> <li>• Whenever a confined space is left unattended (e.g. during breaks), the entry point(s) must be barricaded and warning sign must be hung.</li> </ul> <p><b>11. Conduct Atmospheric Testing</b></p> <ul style="list-style-type: none"> <li>• All atmospheric testing must be performed by a competent person or under the direct supervision of a competent person.</li> <li>• Test the air in all areas and levels top, middle and bottom of the space before entry.</li> <li>• Monitor continuously or retest periodically for as long as the space is occupied and as appropriate for the hazard involved (as identified in the hazards assessment).</li> <li>• Note the date, time and results of the atmospheric test on the Confined Space Permit authorized for the space.</li> <li>• The person performing the atmospheric tests must sign or initial the permit after each test result.</li> <li>• Air testing must be performed and recorded on the permit.</li> <li>• Oxygen content must be between 19.5% - 23%</li> <li>• Flammable and combustible gases and vapours:</li> </ul>
--	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1




# Confined Space Procedure

	<ul style="list-style-type: none"> <li>○ Less than 25% LEL for inspection work with no source of ignition.</li> <li>○ Less than 10% LEL for cold work.</li> <li>○ Less than 5% LEL and less than 23% Oxygen for hot work.</li> </ul> <ul style="list-style-type: none"> <li>● Hydrogen sulphide (H<sub>2</sub>S: must be below 10 ppm)</li> <li>● Carbon Monoxide – Below 25ppm</li> <li>● Record the initial readings of the atmospheric test on the Confined Space Entry Permit.</li> <li>● After breaks, such as lunch, another atmospheric test must be completed to determine if there are any changes.</li> <li>● Periodic testing should be done during the confined space work for any potential changes.</li> <li>● If the air is unsafe according to any of these tests, the hazard must be controlled before entry is allowed. If the air becomes hazardous later on, the entry must be canceled and everyone must leave the space.</li> </ul> <p><b>12. Ventilate, Purge and Inert</b> (as required)</p> <ul style="list-style-type: none"> <li>● If the atmospheric testing identifies that a hazardous atmosphere exists or is likely to exist in a confined space, the confined space must be ventilated, purged, or both before workers enter the confined space.</li> <li>● If ventilating or purging is impractical or ineffective in eliminating the hazardous atmosphere, workers must use the appropriate PPE for working in the confined space.</li> <li>● If mechanical ventilation is needed to maintain a safe atmosphere during the work process, the Supervisor must arrange mechanical ventilation and ensure the number of air changers per hour are in accordance with the hazard assessment and atmospheric testing.</li> </ul>
--	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Confined Space Procedure



- Any portable air exchangers must applicable health & safety and electrical requirements
  - If the ventilation system fails, all workers must evacuate the confined space.
  - Always be aware of where exhausting air will exit the space
  - If it is not possible to achieve a non-explosive, non-flammable atmosphere, then the confined space must be inerted to remove the hazard of fire or explosion before and during entry. Inerting creates an IDLH atmosphere and appropriate safeguards must be used.
  - If a confined space is inerted, the supervisor must confirm that; every CSE worker is provided with supplied air respiratory equipment
  - All ignition sources are controlled
  - The atmosphere remains inerted while workers are inside the confined space
  - Where an explosive or flammable atmosphere may be present in the confined space, all equipment and tools must be kept safe and the work must not create an ignition source.
  - Hot work shall not be performed in a confined that contains, or is likely to contain, an explosive or flammable gas or vapor where the concentration exceeds, or is likely to exceed, 10% of the LEL of the gas or vapor.
- 13. Conduct a Pre-Entry Safety Meeting**
- A pre-entry meeting must be held with all workers involved in the intended confined space entry work.
  - The confined space Job Hazard Assessment (JHA), permit / plan and rescue procedures shall be reviewed by the Supervisor and workers prior to entry into the space
    - Discuss the hazards and hazard controls involved with the confined space entry.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Confined Space Procedure

	<ul style="list-style-type: none"> <li>○ Verify whether there are any changes to the hazards identified.</li> <li>○ Identify the communication, PPE, respiratory equipment, and tools needed for the work.</li> <li>○ Review the exposure limits and testing requirements for, oxygen, carbon dioxide, toxic gas, and explosive atmospheres.</li> <li>○ Verify that each worker has received the training required (valid certification in confined space entry).</li> <li>○ Review Material Safety Data Sheets (MSDS) for the product(s) that may be encountered in the confined space.</li> <li>○ Review the atmospheric testing requirements and define the frequency of testing.</li> </ul>
<b>During Your Work</b>	<ul style="list-style-type: none"> <li>● Monitor continuously or retest periodically for as long as the space is occupied and as appropriate for the hazard involved</li> </ul>
<b>After You Finish</b>	<p><b>1. Close the Permit</b></p> <ul style="list-style-type: none"> <li>● At the end of the job, the Supervisor or designate must conduct a thorough check and sign-off the CSE Permit to confirm that:             <ul style="list-style-type: none"> <li>○ No tools, equipment or workers have been left behind in the confine space</li> <li>○ All blinds have been removed and valves have returned to their correct position.</li> </ul> </li> <li>● After the work had been completed and all entrants are out of the space, the space must be adequately secured against unauthorized or accidental entry. Methods may include locks, barricades and warning signs</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Confined Space Procedure

	<p><b>2. Retain Records</b></p> <ul style="list-style-type: none"> <li>All written records related to CSE (e.g. Safe Work Procedure, CSE Permit) shall be retained for a minimum of <b>two</b> years. Notwithstanding the above, other provincial requirements may apply.</li> </ul>
--	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Ontario Confined Spaces Regulation (O. Reg. 632/05)
- Ontario Ministry of Labour, Confined Spaces Guideline (July 2011)
- Occupational Health and Safety Act (OHSA), R.S.O. 1990
- Confined Space Checklist
- Confined Space Permit
- Confined Space Sign In/Out Log
- Gas Monitor Calibration and Atmospheric Testing Log


This Safe Work Procedure must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Confined Space Procedure

## DECISION TREE FOR CONFINED SPACES

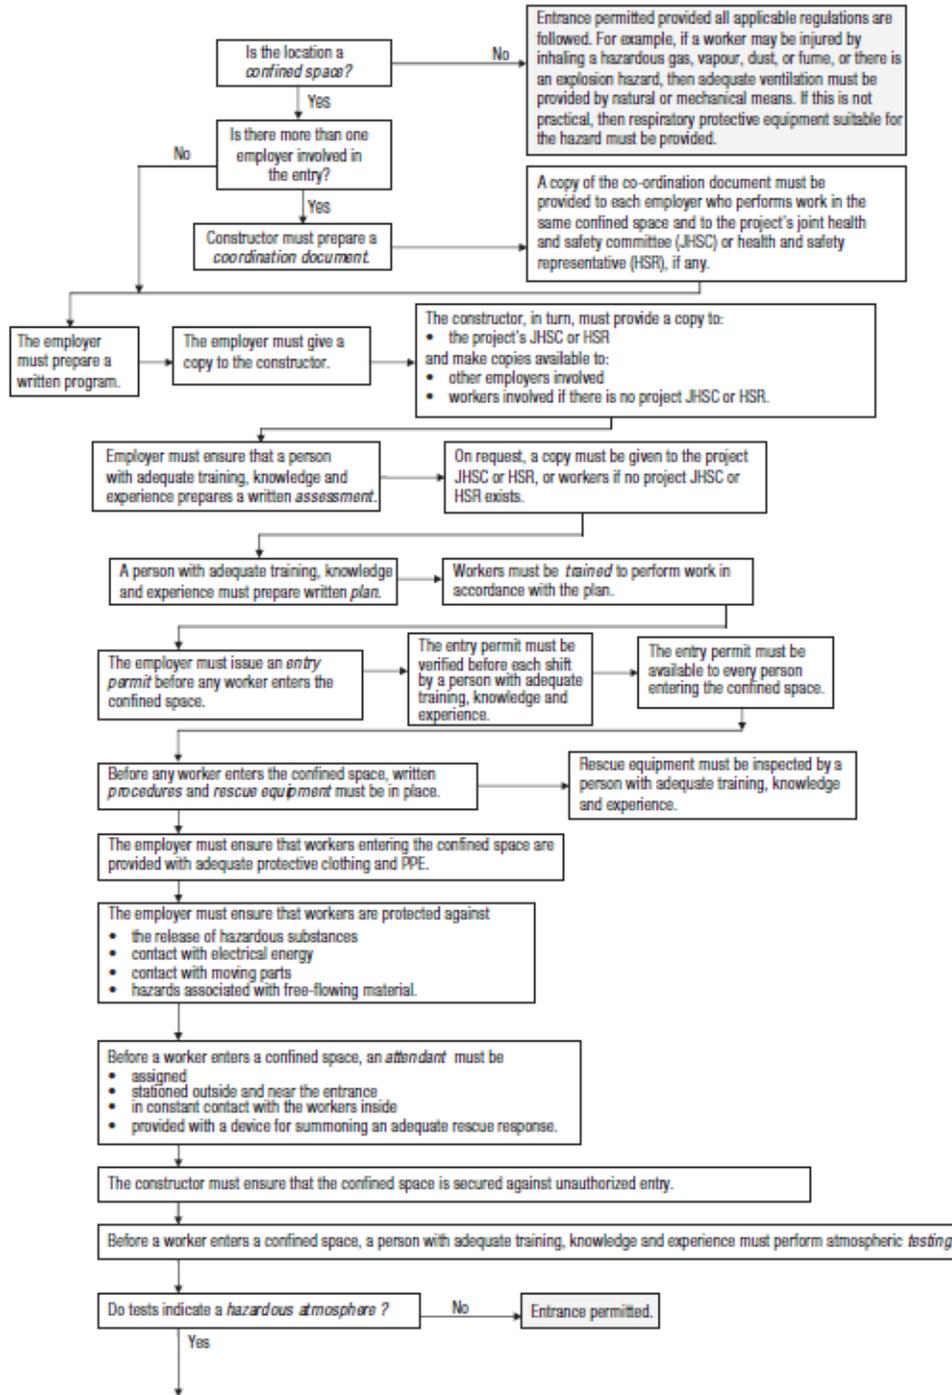


To next page

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Confined Space Procedure

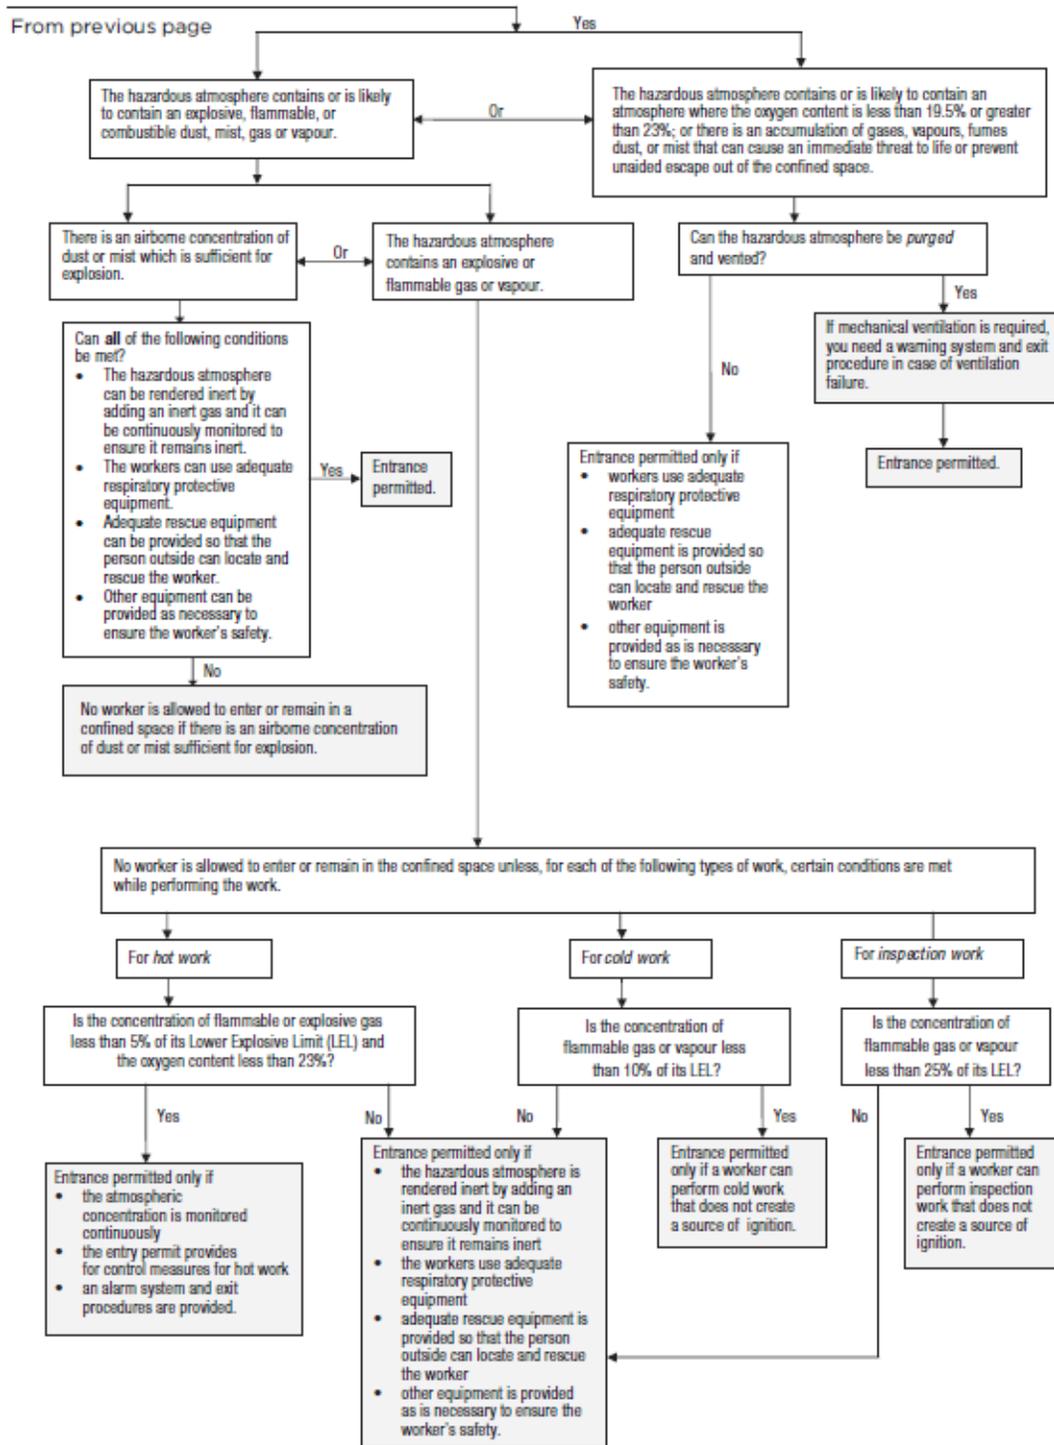

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Confined Space Procedure

## Confined Space Permit

Effective: \_\_\_\_ / \_\_\_\_ / \_\_\_\_\_      From: \_\_\_\_:\_\_\_\_<sup>am</sup>/<sub>pm</sub>      To \_\_\_\_:\_\_\_\_<sup>am</sup>/<sub>pm</sub>

<b>Location</b>	Location of Confined Space:	Project Name:
	Employer Name:	Competent Person:
	Assessment Performed by:	Name of Permit Issuer:
	Description of Confined Space:	
	Description of Work to be Performed:	

**Note:** The permit shall comply with the relevant plan.

Air Monitor Name	Serial #	Last Calibration/Bump Test

<b>Air Quality Results</b>	Time of Test						
	Oxygen %						
	Combustibles %						
	Carbon monoxide (CO)						
	Hydrogen sulphide (H <sub>2</sub> S)						
	Other atmospheric hazard (            )						
	Tester's Name (print):			Signature:			

<b>Hazards &amp; Controls</b>	Atmospheric/Physical Hazards	Controls	Personal Protective Equipment
<b>Hazards &amp; Controls</b>	<input type="checkbox"/> Flammable	<input type="checkbox"/> Purging	<input type="checkbox"/> Respirator
	<input type="checkbox"/> Toxic	<input type="checkbox"/> Mechanical ventilation	<input type="checkbox"/> Gloves
	<input type="checkbox"/> Corrosive	<input type="checkbox"/> Natural ventilation	<input type="checkbox"/> Boots
	<input type="checkbox"/> Oxygen deficient/enriched	<input type="checkbox"/> De-energize, lockout	<input type="checkbox"/> Eye protection
	<input type="checkbox"/> Hot temperatures	<input type="checkbox"/> Blank	<input type="checkbox"/> Head protection
	<input type="checkbox"/> Electrical	<input type="checkbox"/> Inerting	<input type="checkbox"/> Fall protection
	<input type="checkbox"/> Slippery surfaces	<input type="checkbox"/> Other: _____	<input type="checkbox"/> Other: _____
	<input type="checkbox"/> Lighting	<input type="checkbox"/> Other: _____	<input type="checkbox"/> Other: _____
	<input type="checkbox"/> Hot work	<input type="checkbox"/> Other: _____	<input type="checkbox"/> Other: _____
	<input type="checkbox"/> Working at heights	<input type="checkbox"/> Other: _____	<input type="checkbox"/> Other: _____
<input type="checkbox"/> Other			

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Confined Space Procedure


Attendant Entry Log	Worker Name	Permit Reviewed with Workers	Time In	Time Out	Time In	Time Out	Time In	Time Out	
		<input type="checkbox"/>							
		<input type="checkbox"/>							
		<input type="checkbox"/>							
		<input type="checkbox"/>							
		<input type="checkbox"/>							
		<input type="checkbox"/>							
		<input type="checkbox"/>							
		<input type="checkbox"/>							
		<input type="checkbox"/>							
		<input type="checkbox"/>							
		<input type="checkbox"/>							
		<input type="checkbox"/>							
		<input type="checkbox"/>							
		<input type="checkbox"/>							
Attendant's Name (print):				Attendant's Signature:					

Rescue Equipment	<input type="checkbox"/> Winch	<input type="checkbox"/> Respirator	<input type="checkbox"/> Ladder	<input type="checkbox"/> Tripod	<input type="checkbox"/> Harness
	Other:	Other:	Other:	Other:	
	Rescue equipment inspected and in good working order? <input type="checkbox"/> Yes <input type="checkbox"/> No				

Confirmation of Work Completion	Signature	Date	Time

Note: a job specific plan must be developed for each space in addition to the permit.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Air Gap

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk – see CARS form	
Electrical Contact/Shock Arc Flash Explosion Electrical Fire	 Arc flash rated coveralls*	 Face shield*
	 Electrically insulated gloves*	

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ <b>Only qualified personnel are allowed to perform disconnects of a live service. See our electrical standard SWP-E14 Electrical Safety</b></li> <li>✓ Wear approved PPE for construction sites and additional PPE as suggested for electrical work</li> <li>✓ Follow electrical trade safety precautions</li> </ul> <p><b><u>Potential Disconnect Scenarios</u></b></p> <p>1. <b>Full utility disconnect</b> by the utility provider:</p> <ul style="list-style-type: none"> <li>✓ Wait for the disconnect before cutting any wires</li> <li>✓ Obtain written verification of disconnect from the utility owner</li> </ul> <p>2. <b>Building Isolation</b> at the main breaker/switch gear:</p> <ul style="list-style-type: none"> <li>✓ Open main breaker/switch gear and lock out</li> <li>✓ Remove fuses</li> <li>✓ Cut all conduits leaving the main (air gap)</li> <li>✓ Mark all live inbound lines to the main</li> </ul> <p>3. <b>Local Isolation</b> at secondary breaker:</p> <ul style="list-style-type: none"> <li>✓ Mark all live inbound lines from the main breaker/switchgear to the secondary breaker(s)</li> </ul>	<ul style="list-style-type: none"> <li>✗ <b>DO NOT PERFORM ANY DICONNECTS OF LIVE UTILITIES UNLESS AUTHORIZED AND QUALIFIED.</b></li> <li>✗ Do not allow demolition workers to cut into any conduit until it has first been cut and air-gapped by the electrician</li> <li>✗ Do not allow demolition workers to remove any lock-out locks/tags installed by an electrician.</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Air Gap

<ul style="list-style-type: none"> <li>✓ Open and remove all breakers/fuses in the Secondary breaker</li> <li>✓ Cut all <b><u>disconnected</u></b> conduits leaving the secondary breaker (air gap)</li> <li>✓ Mark all live conduits remaining leaving the secondary breaker that are to remain</li> <li>✓ Trace and mark live systems to remain throughout the building using marking intervals of no less than 2 markings per building bay or more as needed to ensure markings can be seen from any position in the building bay</li> <li>✓ <b><u>Demolition supervisor must add their lock to any lock-out system</u></b></li> </ul> <p><b><u>Turnover Process:</u></b></p> <ul style="list-style-type: none"> <li>✓ Prior to demolition workers working on the disconnected system the electrical contractor must take the PDI foreman/superintendent/project manager for a walk-through with the of the area to verify air-gapping and live service identification and any <b><u>outstanding issues</u></b> that need communicating</li> <li>✓ Status information is to be used to mark-up available drawings for a record of conditions to be signed off by the electrical contractor prior to demolition work starting</li> </ul> <p><b><u>Communication:</u></b></p> <ul style="list-style-type: none"> <li>✓ Post signs around the project with color code used to mark the lines that are live</li> <li>✓ Review orally and in writing with all demolition workers the marking system used to distinguish live system components (workers that may be colour blind need special consideration)</li> </ul>	
---	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Air Gap

Safe Work Practice Number

SWP-A06

--	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Occupational Health and Safety act and Regulations 213/91 section 214
- MTCU/OCOT trade license ELECTRICIAN
- PDI Safe Work Practice - SWP-E14 Electrical Safety
- Confirmation of Disconnect Form

--

This SWP must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Safe Work Practice

# Air Gap

Safe Work Practice Number

SWP-A06



Version 1.0  
Last Revised: July 08, 2022  
Revised by: HSE Department

## Confirmation of Disconnect

**Note:** This release requires field verification with all applicable parties.  
*Air Gap Defined As – Physical space between power source and remaining utility.*

PROJECT INFORMATION		
Project Name:	Project #	Date:
Client:		

IMPORTANT CONTACT INFO		
	PRINT NAME	COMPANY
Supervisor Responsible for Scope of Work		
Air Gapping By:		

CHECK LIST   CHECK ALL THAT APPLY			
Purpose:	Location:		
Visual Verification that Main Electrical Services has been air gapped?	<input type="checkbox"/> Yes	<input type="checkbox"/> No	<input type="checkbox"/> N/A
Visual Verification that Utilities (water, gas, sewer) has been air gapped	<input type="checkbox"/> Yes	<input type="checkbox"/> No	<input type="checkbox"/> N/A
Visual Verification that mechanical has been air gapped	<input type="checkbox"/> Yes	<input type="checkbox"/> No	<input type="checkbox"/> N/A

AREA OF RELEASE
Description of area to be demolished:

REFERENCED DRAWINGS   AS APPLICABLE			
Drawings	Type	Drawings	Type

WALK DOWN VERIFICATION AND SIGN OFF				
<b>NOTE:</b> If Demo contractor discovers any electrical, signal or mechanical system components that are not identified in the field as removal, they must immediately stop the work and inform electrical, signal, and mechanical department.				
	PRINT NAME	COMPANY / TYPE OF SERVICE	SIGNATURE	DATE
Air Gapping Confirmed By:				
Air Gapping Confirmed By:				
PDI Supervisor:				
Client Supervisor:				

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Procedure

# Working Alone

Safe Work Procedure Number

SWP-A07

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk – see CARS form	
Violence / working with or near the public Injury Accident Medical Emergency Assault	 <b>Hard Hat*</b>	 <b>Safety Glasses*</b>
	 <b>Steel Toed Boots*</b>	

**Required Materials & Equipment**

Communication Device

**Procedure**

<b>Before You Start</b>	<ul style="list-style-type: none"> <li>Evaluate if you are going to be in a Working Alone situation.</li> </ul> <p style="text-align: center;"><u><i>You are working alone at any time where assistance is not readily available from a co-worker or expected from a member of the public when needed in the normal course of duties or in the event of an injury, illness or emergency</i></u></p> <ul style="list-style-type: none"> <li>Note all risks and mitigation methods to be used in the daily CARS form.</li> <li>Consider alternatives to workers working alone, such as the use of the <a href="#">"buddy system"</a> in potentially high risk situations             <ul style="list-style-type: none"> <li>The purpose of the buddy system is to ensure that if one fire fighter becomes injured, trapped, or unconscious, a buddy(s) will be available to assist or call for help.</li> <li>It is of vital importance that team members operating in hazardous areas are in constant communication with each</li> </ul> </li> </ul>
-------------------------	---

<b>JH&amp;SC Review:</b>	<b>Approved By:</b>	<b>Date Created:</b>	<b>Date of Last Review:</b>	<b>Rev. No.</b>
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Procedure

# Working Alone

Safe Work Procedure Number

SWP-A07

	<p>other. This should be established through visual, audible, or physical means (e.g. a safety guide rope), in order to coordinate their activities. For this system to be effective, team members need to be in proximity to each other to be able to provide assistance in case of an emergency</p> <ul style="list-style-type: none"> <li>• Limit the time of day visits are made to high risk areas/clients</li> <li>• Do not perform these high risk activities when working alone:             <ul style="list-style-type: none"> <li>○ working at heights or in elevator shafts</li> <li>○ working with electricity or with de-energized or locked out/tagged out equipment</li> <li>○ hazardous substances or materials</li> <li>○ hazardous equipment such as chainsaws</li> <li>○ materials at great pressure</li> <li>○ working with the public, where there is a potential for violence</li> </ul> </li> <li>• Do not enter any situation or location where you feel threatened or unsafe</li> <li>• Do not post or announce your official schedule on social media</li> <li>• Check-in by cell phone or radio, to a supervisor or dispatch centre prior to starting work</li> </ul>
<p><b>During Your Work</b></p>	<ul style="list-style-type: none"> <li>• Check-in by cell phone or radio at intervals appropriate to the risk level at your workplace, to a supervisor or dispatch centre.</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Procedure

# Working Alone

Safe Work Procedure Number

SWP-A07

	<ul style="list-style-type: none"> <li>• Follow all established site safety procedures, such as wearing of personal protective equipment, accountability, electrical safety and local emergency response plan.</li> <li>• Report all incidents of violence or injury in accordance with the Incident Reporting and Investigation Standard #1.</li> <li>• Do not remain in any situation or location that you feel has become or has the potential to become threatening or unsafe</li> <li>• Do not carry weapons of any type, including pepper spray, as weapons are dangerous and can be easily used against you</li> <li>• Do not hesitate to call for police assistance</li> </ul>
<b>After You Finish</b>	<ul style="list-style-type: none"> <li>• Check-out by cell phone or radio, to a supervisor or dispatch centre</li> </ul>

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Occupational Health and Safety Act
  - clause 25(2)(a) for providing information and instruction to a worker
  - clause 25(2)(h) for taking every precaution reasonable to protect workers
  - sections 32.01 to 32.08 for protecting workers from violence and harassment
  - subsection 51(1) for reporting requirements if a worker is critically injured or killed
- Working alone: <https://www.ccohs.ca/oshanswers/hsprograms/workingalone.html>
- PDI Incident reporting and investigation standard
- FLHA form

This Safe Work Procedure must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Concrete Cutting

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk – see CARS form			
Noise Flying Debris Dust Electrical Contact		<b>Safety Glasses with Side Shields</b>		<b>Hard Hats</b>
		<b>Hand protection</b>		<b>Respiratory Protection</b>
		<b>Steel Toed Boots</b>		<b>Fire Extinguisher*</b>
		<b>Hearing Protection</b>		<b>Face Shield*</b>

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ Use safety footwear, snug fitting clothing, safety glasses, hearing protection and a hardhat while operating the saw.</li> <li>✓ Before any concrete cutting operation, take care to locate as precisely as possible any rebar, pipes or conduit that may be buried in the concrete</li> <li>✓ Always ensure you are selecting the right kind of concrete cutting tool before starting work</li> <li>✓ Cutting blades should be the correct size, installed properly, guarded at all times, and speed should not exceed the manufacturer’s suggested RPM.</li> <li>✓ Ensure that there are no gas or electric utility lines embedded within their cutting zones</li> <li>✓ Inspect the cut-off saw before start-up, <u>CLEAN THE AIR FILTER.</u></li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not allow bystanders to stand in the work area while using a saw.</li> <li>✗ Do not cut near anything that is flammable.</li> <li>✗ Do not operate the saw without the wheel guard in place.</li> <li>✗ Do not exceed the maximum operating speed marked on the wheel.</li> <li>✗ Do not cock, jam or wedge the wheel into a cut.</li> <li>✗ Do not operate a saw that is damaged, improperly adjusted or improperly assembled.</li> <li>✗ Do not use water on a dry cutting wheel, or sprinkle the blade periodically with water. (Sudden temperature changes will weaken the wheel)</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Concrete Cutting

<ul style="list-style-type: none"> <li>✓ Inspect the cutting wheel for warping and damage before using the saw.</li> <li>✓ Walls and bricks that are to be cut should be supported so they do not fall and pinch the blade or crush workers.</li> <li>✓ Dust concentrations must be kept as low as practicable.</li> <li>✓ Keep water continuously running on the cutting wheel while cutting, <ul style="list-style-type: none"> <li>○ Concrete,</li> <li>○ Asphalt, if dust concentrations may exceed exposure limits.</li> </ul> </li> <li>✓ Operate the saw in well-ventilated areas, when possible.</li> <li>✓ Run the saw at full throttle while cutting.</li> <li>✓ Use the bottom of the wheel for cutting</li> <li>✓ Test newly mounted wheels to run at normal operating speed for approx. 30 seconds with guard in place before beginning to use.</li> <li>✓ Hold a cut-off saw with 2 hands while it is running</li> <li>✓ Use caution when handling fuel</li> <li>✓ Keep all parts of your body away from the cutting wheel while it is running.</li> <li>✓ Run the saw for 30 seconds at normal operating speeds after the cut is finished to</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not cut with the top or front of the blade</li> <li>✗ Do not cut above shoulder height.</li> <li>✗ Do not fuel saw while it is running</li> <li>✗ Do not fuel up saw near an ignition source.</li> </ul>
--	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Concrete Cutting

<p>allow all of the water to be thrown off the cutting wheel.</p> <ul style="list-style-type: none"> <li>✓ Keep good balance and footing; use both hands and keep a firm grip on the handles.</li> <li>✓ Keep work piece at a comfortable distance.</li> <li>✓ Be careful when re-entering a cut.</li> <li>✓ Be alert to ensure that the saw blade does not become pinched in the cut</li> </ul>	
--	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Ontario Reg. 213/91: CONSTRUCTION PROJECTS
- PDI Utility Locate Safe Work Practice
- PDI Air Gap Safe Work Practice

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Procedure




# Lockout / Tag Out

Safe Work Procedure Number

SWP-A09

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk – see FLHA Form	
Hazardous Energy	 <b>Hard hat</b>	 <b>Safety Boots</b>
	 <b>Safety glasses</b>	

**Materials & Equipment**

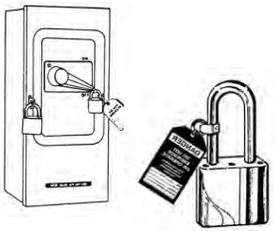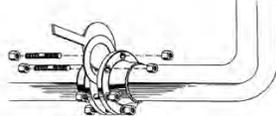 <p style="text-align: center;">Figure 1: Lockout Devices</p>  <p style="text-align: center;">Figure 2: Multilock adaptor</p>  <p style="text-align: center;">Figure 3: Scissor lock</p>	 <p style="text-align: center;">Figure 4: Chains</p>  <p style="text-align: center;">Figure 5: Blank or Blind</p>  <p style="text-align: center;">Figure: 6 Tags</p>
--	---

**Procedure**

<b>Before You Start</b>	<ul style="list-style-type: none"> <li>Employees are to be provided lock out / tag out training prior to starting work.</li> <li>Energy sources must be turned off, disconnected, and/or released before maintenance is performed.</li> <li>Employees are prohibited from performing maintenance on equipment that is not locked out</li> </ul>
-------------------------	---

<b>JH&amp;SC Review:</b>	<b>Approved By:</b>	<b>Date Created:</b>	<b>Date of Last Review:</b>	<b>Rev. No.</b>
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1




# Lockout / Tag Out

	<p><b>STEP 1: Locate Work Area And Identify Equipment, Machinery, Or Other System Components To Be Worked On</b></p> <ul style="list-style-type: none"> <li>Identify the area with references such as floor, room name, elevation, or column number. Identify the equipment that is the subject of the work.</li> </ul> <p><b>STEP 2: Identify All Energy Sources</b></p> <ul style="list-style-type: none"> <li>Identify all energy sources affecting the equipment or machinery. Identify the various energy forms to be locked out such as electrical, momentum, pneumatic, hydraulic, steam, and gravity.</li> </ul> <p><b>STEP 3: Identify The Parts To Be Locked Out Or Isolated</b></p> <ul style="list-style-type: none"> <li>Identify systems that affect, or are affected by, the work being performed. These may include primary, secondary, backup, or emergency systems and interlocked remote equipment. Review the current system drawings for remote energy sources and, where required, identify and confirm with the client or owner the existence and location of any switches, power sources, controls, interlocks, or other devices necessary to isolate the system. Remember that equipment may also be affected by time restrictions for completing the work or time-activated devices.</li> </ul> <p><b>STEP 4: Determine Lockout Methods</b></p> <ul style="list-style-type: none"> <li>Confirm that the lockout of all energy sources is possible. Some equipment may have to be kept operational to maintain service to other equipment that cannot be shut down. Take appropriate steps to provide protection for workers while working near operating equipment. Equipment that can be locked out should be locked out by the methods most appropriate to the hazards.</li> </ul> <p><b>STEP 5: Notify All Personnel Affected</b></p> <ul style="list-style-type: none"> <li>Shutting down equipment may affect operations in other locations, incoming shifts, or other trades who may be planning to operate the locked-out system. Before proceeding with the lockout, inform all</li> </ul>
--	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Lockout / Tag Out



personnel who will be affected. At construction sites with a large workforce or at relatively large factories, you may need to have special communication methods and permits or approvals.

**STEP 6: Shut Down Equipment And Machinery**

- Qualified personnel must shut down the equipment, machinery, or other system components, placing them in a zero-energy state. Trace all systems to locate and lock out energy sources. The main source may be electrical, for instance, but pneumatic and other forms of energy may also be present. Always look for other possible energy sources.
- All equipment capable of being energized or activated electrically, pneumatically, or hydraulically must be de-energized or de-activated by physically disconnecting or otherwise making the apparatus inoperable.
- Always ensure that the client and operators are aware of the plan to shut down and lock out equipment, machinery, or other system components.
- In some cases, operations personnel or equipment operators may be required to shut down components because of their special qualifications or knowledge of the system. In determining what needs to be shut down and locked out, consider the different energy sources that may be found in the system.

**STEP 7: Install Lockout Devices**

- After the circuit has been de-energized and locked out by the person in charge, each worker involved in the lockout must be protected by placing his or her personal lock on the isolating device for each energy control point
- Remember—even though the disconnect is already locked out, you are not protected until you attach your own personal safety lock.
- Each worker must retain his or her key while the lock is in place. Only the worker in charge of the lock should have a key.

Locks

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Lockout / Tag Out

	<p>Locks should be high-quality pin-type, key-operated, and numbered to identify users</p> <p><b>Multiple locks</b></p> <p>Multiple locks and lockout bars When several workers or trades are working on a machine, you can add additional locks by using a lockout bar or multi-lock adapter (Figure 2). You can add any number of locks by inserting another lockout bar into the last hole of the previous bar.</p> <p><b>Other lockout devices</b></p> <ul style="list-style-type: none"> <li>○ Scissors—have holes for locks and should be made of hardened steel (Figure 3).</li> <li>○ Chains—should be high quality and snug fitting (Figure 4).</li> <li>○ Blocks or cribbing—prevent or restrict movement of parts.</li> <li>○ Blanks or blinds—are solid metal plates inserted at flanged connections to prevent the flow of liquids or gases (Figure 5).</li> <li>○ Pins and clamps—should be of high-quality materials and designed to fit the system.</li> </ul> <ul style="list-style-type: none"> <li>● Remember . . . Merely removing a fuse doesn’t constitute lockout. The fuse could be easily replaced. The fuse should be removed and the box locked out. The lockout devices attached to one system should not prevent access to the controls and energy-isolating devices of another system.</li> </ul> <p><b>STEP 8: Tagging</b></p> <ul style="list-style-type: none"> <li>● Each worker involved in a lockout operation must attach a tag made of non-conducting material in a conspicuous location and secure it to prevent inadvertent removal. The tag must identify the worker’s name, the worker’s employer, the date of lockout, and the reason for the lockout. A tag in itself offers no guarantee that a machine or system is locked out. It simply provides information (Figure 6).</li> <li>● Signs must be placed on the system indicating that it must not be energized or operated</li> </ul>
--	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Lockout / Tag Out

	<ul style="list-style-type: none"> <li>• Guards, locks, temporary ground cables, chains, tags, and other safeguards must not be tampered with or removed until             <ul style="list-style-type: none"> <li>○ the work is complete, and</li> <li>○ each worker has removed his or her personal lock.</li> </ul> </li> <li>• A record must be kept of all equipment locked out or otherwise rendered inoperable so that all of these devices can be reactivated once the work is complete.</li> </ul> <p><b>STEP 9: Verify Zero-Energy State</b></p> <ul style="list-style-type: none"> <li>• After any power or product remaining in the equipment has been discharged or disconnected by qualified personnel, verify that all personnel are clear of the equipment. Then try, with extreme caution, to start the equipment manually. Look for any movement or functions. If none are observed, confirm that all energy sources are at a zero energy state.</li> <li>• Test the system to ensure that all electrical components are de-energized and de-activated, including interlocking and dependent systems that could feed into the system, either mechanically or electrically</li> </ul>
<p><b>During Your Work</b></p>	<p><b>STEP 10: Perform The Task</b></p> <ul style="list-style-type: none"> <li>• Carry out and complete the work assignment.</li> </ul>
<p><b>After You Finish</b></p>	<p><b>STEP 11: Communicate That Work Is Complete And That All Personnel Are Clear</b></p> <ul style="list-style-type: none"> <li>• Ensure that personnel are clear of the locked-out equipment, machinery, or system.</li> <li>• Remove only your tags and locks.</li> <li>• Tell personnel that were originally informed of the lockout that the equipment, machinery, or system is no longer locked out.</li> </ul> <p><b>STEP 12: Restore Power</b></p> <ul style="list-style-type: none"> <li>• Return systems to operational status and the switches to power ON. Have qualified personnel restart machinery or equipment.</li> </ul> <p><b>STEP 13: Return Control To Operating Personnel</b></p>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Lockout / Tag Out

	<ul style="list-style-type: none"> <li>When all work is completed, the person in charge of the lockout operation should formally return control of the equipment or system to plant personnel.</li> </ul> <p><b>STEP 14: Record Date/Time Lockout Removed And System Restored</b></p> <ul style="list-style-type: none"> <li>This last step is important. It saves valuable information that may be lost if not recorded. Staff involved in the shutdown may not remain at the same jobsite. Owners or operators may require this information to help plan future shutdowns</li> </ul> <p><b>LOCK REMOVAL WHEN PERSON IS ABSENT</b></p> <ul style="list-style-type: none"> <li>Workers should always apply and remove their own locks. However, in the rare event that the worker who applied a lock is unable to remove it (e.g. due to sudden illness or injury) the lock can be removed only under the direction and in the presence of the worker’s supervisor who has assessed the situation and determined that it is safe to remove the lock.</li> <li>A lock removal form must be completed by the supervisor and kept on file.</li> <li>The person whose lock was removed must be notified verbally and in writing of the removal upon his/her return, and before resuming work.</li> <li>Anyone who removes someone else’s lock without following this procedure will be subject to disciplinary action.</li> </ul>
--	---

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Occupational Health and Safety Act
- Section 190 of the Construction Regulation (O. Reg. 213/91)
- IHSA Construction Safety Manual: Section 27 Lockout and Tagging


This Safe Work Procedure must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Lockout / Tag Out

## Decision Making Flowchart

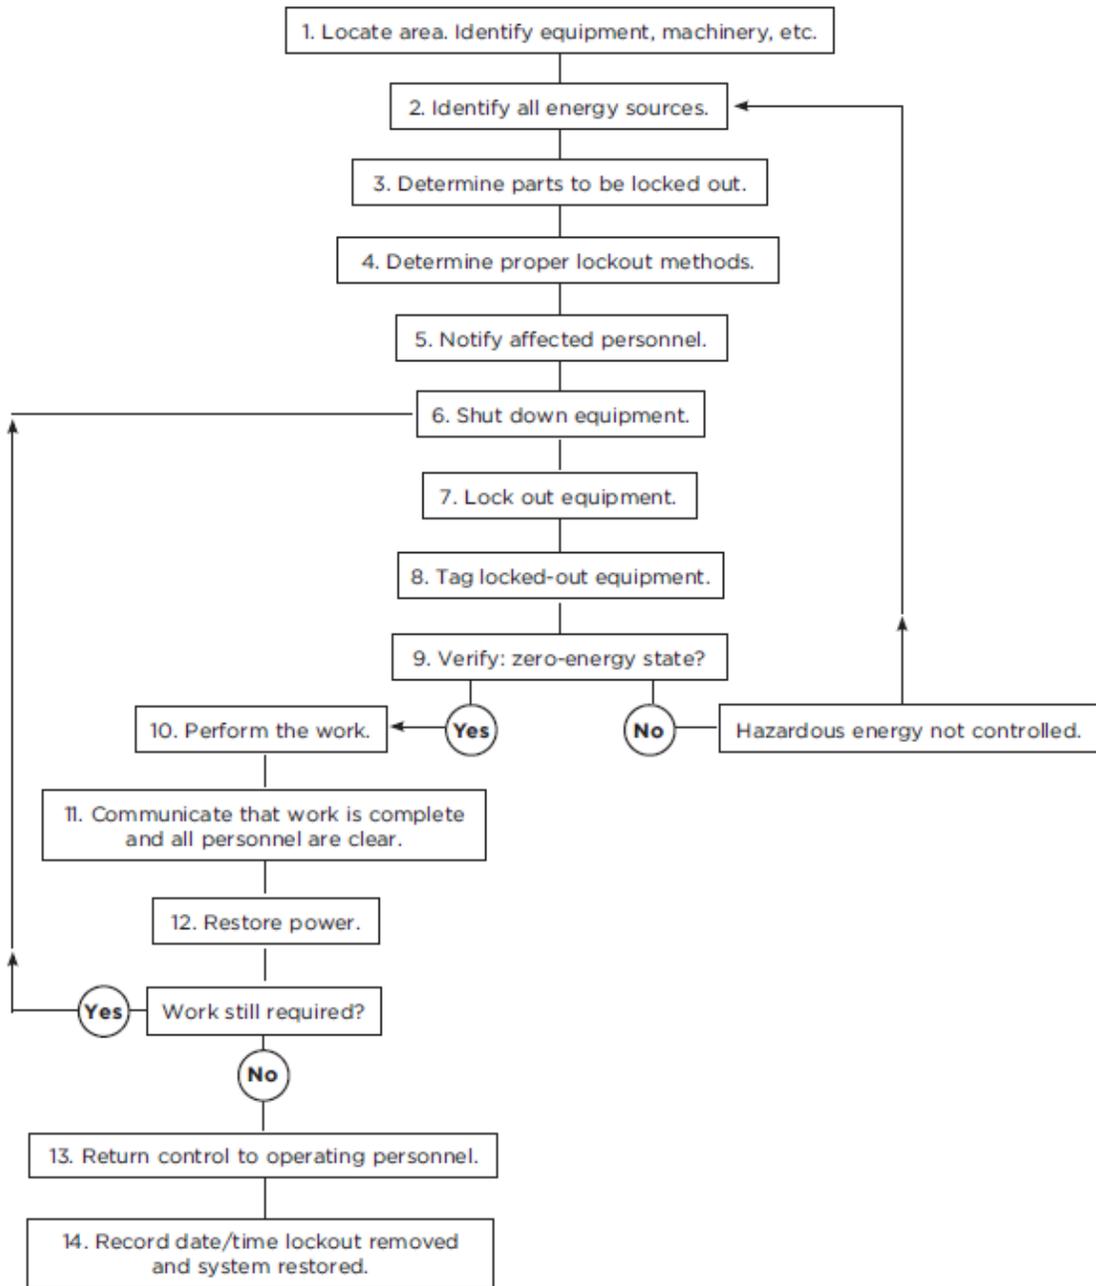

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Wildlife

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk – see FLHA form	
<ul style="list-style-type: none"> <li>• Bites / lacerations</li> <li>• Infection</li> <li>• Parasites</li> <li>• Disease</li> </ul>	 <b>Steel Toed Boots</b>	 <b>Noise Maker</b>

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ Report all animal sightings immediately.</li> <li>✓ Be on the lookout for obvious signs of recent activities in the area i.e. prints</li> <li>✓ Avoid an animal confrontation, if possible.</li> <li>✓ Ensure that all food is stored properly and waste is regularly disposed of offsite.</li> <li>✓ Familiarize with the wildlife that may be present in the area you will be working</li> </ul> <p><b>SMALL WILD ANIMALS</b></p> <ul style="list-style-type: none"> <li>✓ The best defense is avoidance.</li> <li>✓ If you must defend yourself, have things nearby to protect yourself (stick, shovel, axe etc.)</li> <li>✓ Slowly back away facing the animal.</li> <li>✓ If bitten by a wild animal, clean the wound with soap and water, and obtain medical assistance immediately, advising medical staff of the potential for infectious diseases, such as rabies.</li> </ul> <p><b>LARGE ANIMALS/BEARS</b></p> <ul style="list-style-type: none"> <li>✓ Check with the land owner or general contractor to see if there have been any</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not intentionally harm ANY animal (regardless of size).</li> <li>✗ Do not leave any food or waste around the area.</li> <li>✗ Do not engage or entice wildlife.</li> </ul> <p><b>SMALL WILD ANIMALS</b></p> <ul style="list-style-type: none"> <li>✗ Do not turn your back to the animal.</li> <li>✗ Do not run.</li> <li>✗ Do not crouch down.</li> <li>✗ Never touch or handle wild animals – healthy, sick or deceased. Parasites and other infectious diseases may be present.</li> </ul> <p><b>LARGE ANIMALS/BEARS</b></p> <ul style="list-style-type: none"> <li>✗ Do not run.</li> <li>✗ Do not turn your back.</li> <li>✗ Do not look scared or show fear.</li> <li>✗ Do not crouch down.</li> <li>✗ Do not approach.</li> <li>✗ Do not panic</li> <li>✗ Never play dead.</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Wildlife

<p>recent large animal/bear sightings or incidents in your work area.</p> <ul style="list-style-type: none"> <li>✓ If working or patrolling an area with known large animal/bear activity, always be prepared. Carry a stick, shovel, bull horn, can of bear spray or a bear banger kit at all times. Remember – the equipment will only be useful if you have it with you during an emergency.</li> <li>If you encounter a Bear:</li> <li>✓ Make every effort not to panic, and assess the situation.</li> <li>✓ Stand your ground.</li> <li>✓ Make yourself appear larger by raising your arms over your head.</li> <li>✓ Make as much noise as possible, wave your arms, yell, scream.</li> <li>✓ Continually face the large animal/bear and talk, growl or roar in a low-pitched voice.</li> <li>✓ Allow the animal an escape route, if the animal/bear is cornered.</li> <li>✓ To report large animal/bear problems, contact the Bear Reporting Line at 1-866-514-2327.</li> <li>✓ ALWAYS notify your Supervisor, Foreman, or PM if you have encountered any large animals/bears during your shift.</li> </ul>	
---	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

Wildlife and Nature Ontario [www.ontario.ca](http://www.ontario.ca)  
 Ministry of Natural Resources, Bear Wise: “What to do if you encounter a bear”:  
[http://www.mnr.gov.on.ca/en/Business/Bearwise/2ColumnSubPage/STEL02\\_167730.html](http://www.mnr.gov.on.ca/en/Business/Bearwise/2ColumnSubPage/STEL02_167730.html)

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Housekeeping

Safe Work Practice Number

SWP-A11

Potential Hazards Present	Required Personal Protective Equipment <small>* may be required based on risk – see FLHA form</small>	
Slippery surfaces Tripping Hazards Dust Sharp objects Heavy items	 <b>Safety Glasses with Side Shields</b>	 <b>Hard Hats</b>
	 <b>Hand protection*</b>	 <b>Respirator*</b>
	 <b>Steel Toed Boots</b>	

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ Remove waste and debris from the work site on a continual basis.</li> <li>✓ Debris may be dropped via a chute or by using an enclosed drop zone</li> <li>✓ Install dust tight hoarding if required</li> <li>✓ Keep walkways and travel paths clear of material</li> <li>✓ Ensure extension cords are suspended where possible</li> <li>✓ Store unused tools and equipment in the job box</li> <li>✓ Remove tripping hazards as soon as possible</li> <li>✓ Clean up spills as soon as possible</li> <li>✓ Place domestic garbage in a suitable container</li> <li>✓ Vacuum dust whenever possible</li> <li>✓ Use water or sweeping compounds as necessary</li> <li>✓ Use respiratory protection as required when dusty conditions arise</li> <li>✓ Place debris in suitable containers for transport to the disposal bin</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not let waste materials accumulate on the job</li> <li>✗ Do not stockpile material closer than 1.8 metres to a floor opening or an open edge on a floor</li> <li>✗ Do not overload a floor when stockpiling waste</li> <li>✗ Do not store materials in a walkway</li> <li>✗ Do not let food waste accumulate in the workplace</li> <li>✗ Do not attempt to lift heavy items by yourself</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Housekeeping

Safe Work Practice Number

SWP-A11

✓	Get assistance when lifting heavy or awkward pieces of debris	
✓	Ensure materials and equipment are properly stored in designated locations, when not in use.	

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Ontario Regulation for Construction Projects - Sec. s.11: Floor conditions
- Priestly SWP: Spills

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Site Traffic Control

Potential Hazards Present (From Risk Assessment)	Required Personal Protective Equipment <small>* may be required based on risk – see FLHA form</small>	
Struck by vehicle	 <b>Safety Glasses with Side Shields</b>	 <b>Hard Hats</b>
	 <b>High Visibility Vest</b>	 <b>Steel Toed Boots</b>

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ Plan the work so that vehicles are required to reverse as little as possible</li> <li>✓ Ensure travel routes are maintained in good condition</li> <li>✓ Follow designated travel routes</li> <li>✓ Keep a safe following distance</li> <li>✓ Comply with posted speed limits on site</li> <li>✓ Use a signaller to assist with vehicle reversing if the operators view is obstructed or where a person may be at risk from the vehicle movement or its load</li> <li>✓ Signallers are to receive both oral and written instructions on how to perform their duties (traffic plan)</li> <li>✓ Signallers are to be in constant view of the equipment operator</li> <li>✓ Signallers are to have a clear view of the intended path of the vehicle</li> <li>✓ Signallers are to communicate with vehicle operators by using a prearranged set of visual signals</li> <li>✓ Post signs warning of vehicles operating in reverse</li> <li>✓ Ensure vehicles are equipped with audible back up alarms</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not operate a vehicle in reverse unless it is absolutely necessary</li> <li>✗ Do not move a vehicle without authorization</li> <li>✗ Do not move a vehicle if you have lost sight of the signaler</li> <li>✗ Do not park in another vehicle’s blind spot</li> <li>✗ Do not disable back up alarms on vehicles or heavy equipment</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Site Traffic Control

Safe Work Practice Number

SWP-A12

✓	Truck drivers are to remain in the cab while being loaded or are to leave the vehicle prior to being loaded	
---	---	--

<b>Guidance Documents/ Standards/ Applicable Legislation/ Other:</b>
<ul style="list-style-type: none"> <li>Ontario Regulation for Construction Projects - Sec. 104 - 10</li> </ul>

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	N/A	0


JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Site Traffic Control

## TRAFFIC CONTROL Hand Signals

2008

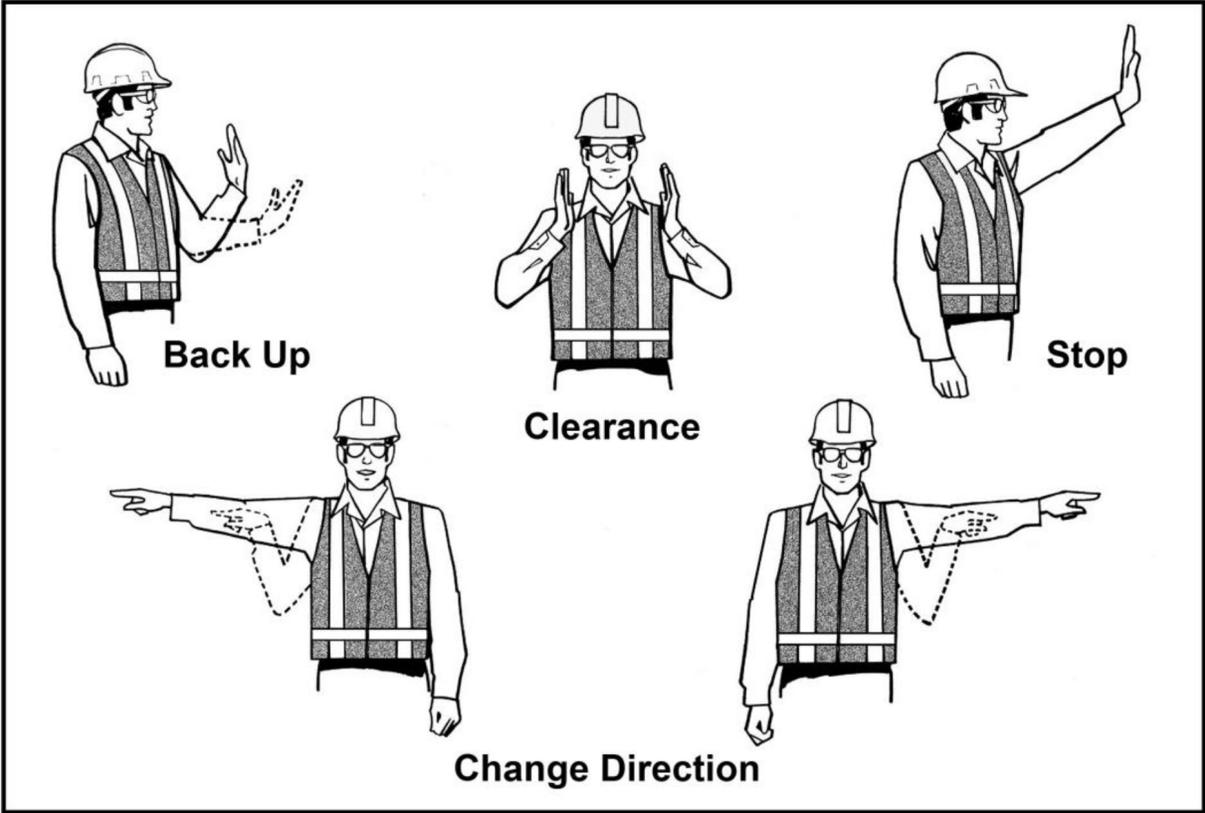

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Barricades and Guardrails

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk – see FLHA form	
Unauthorized personnel entry Fall from heights	 <b>Safety Glasses with Side Shields</b>	 <b>Hard Hats</b>
	 <b>Steel Toed Boots</b>	 <b>High Visibility Vest</b>

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ Wear approved PPE as noted</li> <li>✓ Review the site plan and site hazards prior to the start of work</li> <li>✓ Ensure that the type of barricade is appropriate for its purpose:                             <ul style="list-style-type: none"> <li>○ Delineate work areas for “demolition workers only” when on a multi-trade project, by using barrier tape and posting signs with contact information if access to the area is required.</li> <li>○ Restrict access to areas where only “authorized workers” immediately involved with the demolition task are allowed, by posting barrier tape and signs with contact information and instructions to wait for an escort for entry into the area.</li> <li>○ Exclude access by installing hard fencing or hoarding with warning signs that read “no entry” include a description of</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not lean against any barricaded areas</li> <li>✗ Do not work at heights unless properly trained</li> <li>✗ Do not cross any barrier without authorization</li> <li>✗ Do not remove barriers or guardrails until the underlying hazard is eliminated and authorization is received.</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1




# Barricades and Guardrails

<p>the hazard(s), and contact information for the supervisor that controls the excluded access area.</p> <ul style="list-style-type: none"> <li>✓ A guardrail is to be used if a worker is exposed to a fall of 2.4 metres or more and has access to the open side of a: <ul style="list-style-type: none"> <li>• Floor, including a mezzanine or balcony floor</li> <li>• Bridge surface</li> <li>• Roof while formwork is in place</li> <li>• Scaffold platform or other work platform, runway</li> <li>• or ramp.</li> </ul> </li>   <li>✓ Fixed guardrails, when required, as a minimum must have <ul style="list-style-type: none"> <li>• A top rail, mid-rail, and toeboard secured to vertical supports</li> <li>• A top rail between 0.9 m (3 ft) and 1.1 m (3 ft 7 in) high</li> <li>• A toeboard installed flush with the surface and at least 89 mm (3½ in) high (100 mm (4 in) high if made of a material other than wood)</li> <li>• Posts at least 38 mm (1½ in) by 89 mm (3½ in) and no more than 2.4 m (8 ft) apart. Installed no more than 300 mm (1 ft) from an edge</li> </ul> </li> </ul>	
---	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1

# Barricades and Guardrails

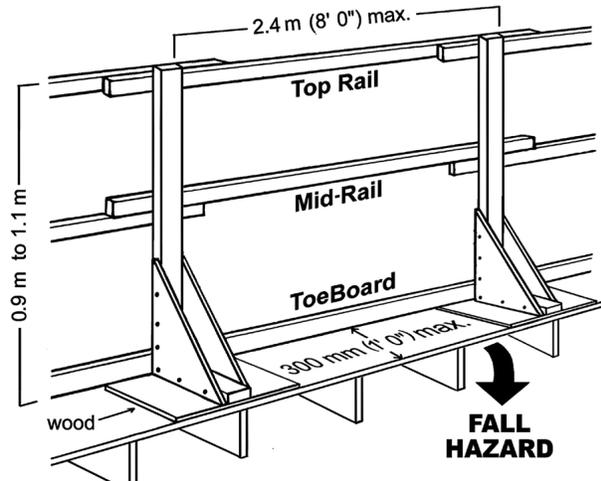

- ✓ Guardrails must be able to withstand:
    - A point load of 675 newtons applied in a lateral direction to the top rail.
    - A point load of 450 newtons applied in a vertical downward direction to the top rail.
    - A point load of 450 newtons applied in a lateral or vertical downward direction to the intermediate rail, or midway between the top rail and the toe board.
    - A point load of 225 newtons applied in a lateral direction to the toe board
- Note: 1 newton = .225 pounds
- ✓ Workers must wear proper fall protection equipment when working near unguarded fall hazards.

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Occupational Health & Safety Act – section 26.3 of the Construction Projects regulation (213/91) for Guardrails <https://www.ontario.ca/laws/regulation/910213>
- Infrastructure Health and Safety Association - [https://www.ihsa.ca/rtf/health\\_safety\\_manual/pdfs/equipment/Guardrails.pdf](https://www.ihsa.ca/rtf/health_safety_manual/pdfs/equipment/Guardrails.pdf)
- PDI Safe Work Practice: Working at heights

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Barricades and Guardrails

Safe Work Practice Number

SWP-A13

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Excavations and Trenches

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk – see FLHA form			
Cave-ins Falls into trenches or excavations Tripping over equipment, debris and spoil Excavated material or other objects falling on workers Exposure to underground services or overhead electrical cables Unstable adjacent structures Hazardous atmosphere (noxious gases/lack of oxygen) Vehicles and other mobile equipment Flooding / Water Contaminated Soils		<b>Safety Glasses with Side Shields</b>		<b>Hard hat</b>
		<b>Safety Boots</b>		<b>Respiratory Protection*</b>
		<b>Fall Protection*</b>		<b>Hi visibility Clothing</b>
				<b>Hand Protection*</b>

DO	DO NOT
<p>✓ The constructor is required to complete a Notice of Project when:</p> <ul style="list-style-type: none"> <li>○ a project exceeds \$50,000 or</li> <li>○ excavation is planned for a trench that a worker may enter and that trench:             <ul style="list-style-type: none"> <li>▪ is more than 300 metres long or</li> <li>▪ more than 1.2 metres deep (47 inches) and more than 30 metres (98 feet) long, or</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>✗ Never enter a trench deeper than 1.2 metres (47 inches) unless the walls are sound, made of solid rock, properly sloped, shored or protected by a trench box.</li> <li>✗ Never work alone in a trench</li> <li>✗ Do not position or operate a vehicle or machinery in a manner that could affect the wall's stability</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	October 23 <sup>rd</sup> 2025	2



# Excavations and Trenches

<ul style="list-style-type: none"> <li>▪ is required by regulation to be designed by a professional engineer</li> <li>✓ Only competent persons may conduct ground disturbance activities.</li> <li>✓ A pre- job safety meeting must be completed before conducting ground disturbance</li> <li>✓ A safe work permit is required to be completed prior to starting any ground disturbance activity.</li> <li>✓ Before any excavation or digging begins, all underground utilities and services must be identified and located using available site drawings, utility locates, and approved detection equipment.</li> <li>✓ Ensure that all services have been located or marked in or near the area to be excavated.</li> <li>✓ Ensure notifications and approvals are complete for all gas, electrical and other buried services owners prior to starting ground disturbance.</li> <li>✓ If a service poses a hazard, it must be shut off and disconnected before the excavation activity begins.</li> <li>✓ If a potentially hazardous service cannot be disconnected, the service owner must be asked to supervise the service’s uncovering during the excavation.</li> </ul>	
---	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	October 23 <sup>rd</sup> 2025	2



# Excavations and Trenches

<ul style="list-style-type: none"> <li>✓ Emergency response procedures are to be put in place in the event that a buried facility is damaged.</li> <li>✓ Prevent damage to adjacent structures by engaging a professional engineer who must specify in writing the precautions to be taken</li> <li>✓ Determine the soil type to protect excavation walls from collapsing. <ul style="list-style-type: none"> <li>○ This can be determined by doing things such as inspecting trenches and excavations following a rainfall, melting snow, thawing earth and overflows from nearby streams, storm drains and sewers.</li> <li>○ The soil type determines the strength and stability of the excavation walls</li> </ul> </li> <li>✓ Strip the wall of a trench or excavation of any loose rock or other material that may slide, roll or fall on a worker.</li> <li>✓ Keep heavy equipment, excavated soil or rock and construction material at least 1 meter away from the upper edges of the trench or excavation.</li> <li>✓ Maintain a clear work space of at least 450 millimeters (18 inches) between the wall of an excavation and any formwork, masonry or similar wall</li> <li>✓ Provide a barrier at least 1.1 meters (42 inches) high at the top, if an excavation does not meet regulatory slope requirements and is more than 2.4 meters (eight feet) deep</li> </ul>	
--	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	October 23 <sup>rd</sup> 2025	2



# Excavations and Trenches

<ul style="list-style-type: none"> <li>✓ Trenches and excavations must be inspected daily for hazards, and when conditions change, before workers enter them. <ul style="list-style-type: none"> <li>○ This must be done by a "competent person", as defined by the OHSA.</li> </ul> </li> <li>✓ Provide safe access and egress for workers at excavations by means of ladders, steps, ramps, or other safe methods of entering or exiting. <ul style="list-style-type: none"> <li>○ Trenches must have ladders placed in the area protected by the support system and be accessible in the event of a collapse</li> </ul> </li> <li>✓ Workers must be protected against trench or excavation cave-ins and other hazards using three basic methods: <ul style="list-style-type: none"> <li>○ <b>Sloping</b> which involves cutting back trench walls at an angle, inclined away from the excavation.</li> <li>○ <b>Shoring</b> which helps support trench and excavation walls to prevent movement of soil, underground utilities, roadways and foundations. Timber and hydraulic systems are the most commonly used supports to shore up walls. Both types must be designed by a professional engineer.</li> <li>○ <b>Prefabricated support systems</b> (for example, trench boxes and shields) which can prevent soil cave-ins.</li> </ul> </li> <li>✓ The buried facility owner shall be notified prior to the start of backfilling operations</li> </ul>	
--	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	October 23 <sup>rd</sup> 2025	2




# Excavations and Trenches

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**



- PDI Field Level Hazard Assessment Form (FLHA)
- PDI Safety Standard 8: Hazard Assessment
- O. Reg. 213/91: CONSTRUCTION PROJECTS s 222-242

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

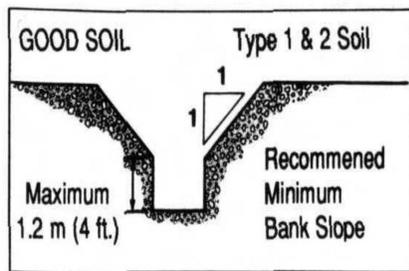

Type 1 – hard, very dense, low natural moisture content, high degree of internal strength

Type 2 - very stiff, medium natural moisture content, medium degree of internal strength

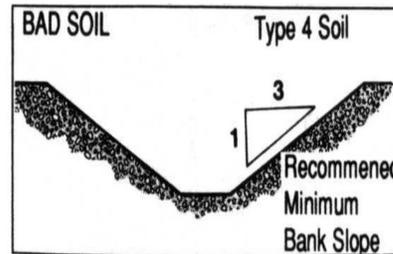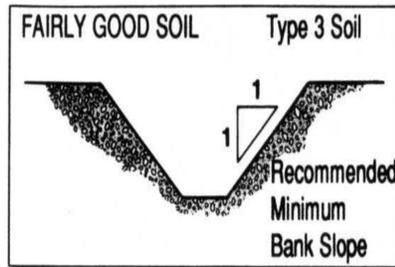

Type 3 – stiff to firm and compact to loose in consistency, or previously excavated soil, low degree of internal strength

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	October 23 <sup>rd</sup> 2025	2



Safe Work Practice

# Working at Heights

Safe Work Practice Number

SWP-A15


Potential Hazards Present	Required Personal Protective Equipment <small>* may be required based on risk – see FLHA form</small>	
Fall from Heights Suspension Trauma	 <b>Safety Glasses with Side Shields</b>	 <b>Hard Hats</b>
	 <b>Steel Toed Boots</b>	 <b>Fall Protection*</b>

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ Assess for hazards including electrical and maintain limits of approach</li> <li>✓ Ensure working surfaces and access equipment are safe and stable</li> <li>✓ Fall protection is required when a worker could:               <ul style="list-style-type: none"> <li>• Fall more than 3 metres.</li> <li>• Fall more than 1.2 metres, if the work area is used as a path for a wheelbarrow or similar equipment.</li> <li>• Fall into operating machinery.</li> <li>• Fall into water or another liquid.</li> <li>• Fall into or onto a hazardous substance or object.</li> <li>• Fall through an opening on a work surface</li> </ul> </li> </ul> <p>Eliminate the hazard, whenever possible by using guardrails:</p> <ul style="list-style-type: none"> <li>✓ Cover and identify all floor openings</li> <li>✓ Guardrails to have a top rail, mid-rail and toe boards in place.</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not work at heights if it can be avoided</li> <li>✗ Do not use the top rungs of a ladder</li> <li>✗ Do not overreach on a ladder</li> <li>✗ Do not move a lift without being tied off</li> <li>✗ Do not use a scaffold unless built and inspected by a competent person</li> <li>✗ Do not use an anchor point unless it can withstand the load of a fall</li> <li>✗ Do not leave tools/equipment near edges of work platform</li> <li>✗ Do not exceed load rating capacity</li> <li>✗ Do not operate an Elevated Work Platform unless you are trained</li> <li>✗ Do not remove guardrails</li> <li>✗ Do not use the wrong length of lanyard</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Working at Heights
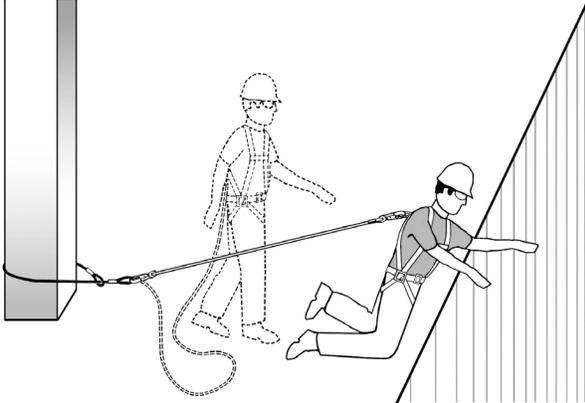
<p>✓ Ensure there is protection from falling objects below where you are working</p> <p>If guard rails are not practicable or do not provide suitable protection:</p> <p>Travel Restraint</p> <p>✓ Travel restraint lets a worker travel just far enough to reach the edge but not far enough to fall over.</p>  <p>✓ A typical travel restraint system consists of the following CSA-approved equipment attached to adequate anchorage:</p> <ul style="list-style-type: none"> <li>○ Full-body harness</li> <li>○ Lanyard</li> <li>○ Lifeline</li> <li>○ Rope grab to attach harness or lanyard to lifeline.</li> </ul> <p>✓ Adequate anchorage for a travel restraint system means that it is capable of supporting a static load of 2 kilonewtons (kN) (450 lb) with a recommended safety factor of at least 2 (i.e., 4 kN or 900 lb).</p>	<ul style="list-style-type: none"> <li>✗ Do not use an anchor point that may cause a pendulum effect</li> <li>✗ Do not use a rope grab that is not functioning properly</li> <li>✗ Do not exceed 30" on a lanyard attached to a rope grab.</li> </ul>
---	---

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1




# Working at Heights

<p>✓ Every fall hazard in the proposed work area must be identified and careful consideration must be given to the selection of appropriate components and the location of adequate anchor points</p> <p>Fall Arrest</p> <p>✓ A fall arrest system must prevent a falling worker from hitting the ground or any object or level below the work. It must include the following:</p> <ul style="list-style-type: none"> <li>○ A CSA-approved full-body harness</li> <li>○ A lanyard equipped with an energy absorber (unless the energy absorber could cause a falling worker to hit the ground or</li> </ul> <p>✓ Any worker who works at height is required to have received proper working at heights training.</p> <ul style="list-style-type: none"> <li>○ In Ontario the provider must be Ministry approved</li> <li>○ Training is valid for three (3) years</li> <li>○ Proof of training must be immediately available at all times</li> </ul> <p>✓ A fall arrest system must not subject a falling worker to a peak fall-arrest force greater than 8 kN (1,800 lb) with a safety factor of two (i.e., 16 kN or 3,600 lb)</p> <p>✓ A fall arrest rescue plan must be developed before workers may use a fall arrest system at a work site</p> <p>✓ Inspect all fall protection equipment before each use</p>	
---	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1

# Working at Heights

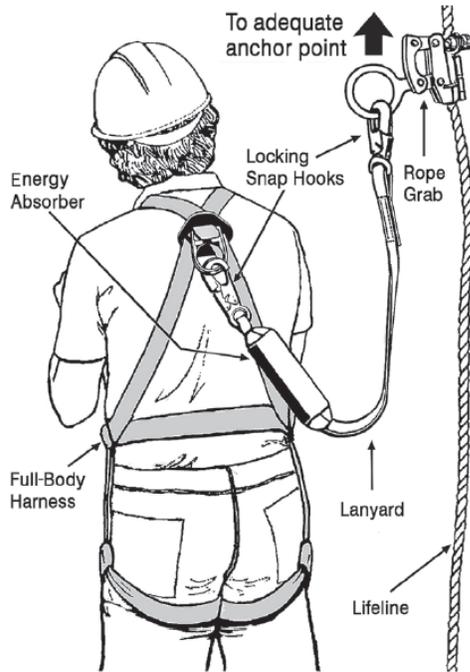

- ✓ Defective fall protection equipment must be removed from service
- ✓ Ensure horizontal life lines have been designed by an engineer
- ✓ Client fall protection requirements may be more stringent than legislated requirements, and employees must meet these requirements when working at client sites
- ✓ In Nova Scotia, a job-specific Safe Work Plan (or checklist/work permit) is to be completed before performing work at a height of 7.5 m (25 ft) or more

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Working at Heights

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- O. Reg. 213-91, Section 26-27
- O. Reg. 252/14, s. 1.
- [https://www.labour.gov.on.ca/english/hs/sawo/pubs/fs\\_wahconstruction.php](https://www.labour.gov.on.ca/english/hs/sawo/pubs/fs_wahconstruction.php)
- Ontario Regulation 297/13 (Occupational Health and Safety Awareness and Training).
- Customer Site Specific Rules and Procedures.
- CAN/CSA-Z259.10-06: Full Body Harnesses.
- PDI Safety Standard 003 – Personal Protective equipment section 4.6
- PDI Daily Fall Protection Equipment Inspection Checklist

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Working at Heights

## Fall Protection Work Plan

Company name \_\_\_\_\_ Project \_\_\_\_\_

Supervisor in charge \_\_\_\_\_ Work location \_\_\_\_\_

Estimated start date and duration \_\_\_\_\_

Description of work \_\_\_\_\_

Fall protection equipment \_\_\_\_\_

Manufacturer's reference material \_\_\_\_\_



**Step 1: Identify the fall hazard.** (Provide a description.) \_\_\_\_\_



**Step 2: Try to eliminate the fall hazard.**

Can the work be relocated to a place where a fall hazard does not exist?	<input type="checkbox"/> Y <input type="checkbox"/> N
Can the work be delayed until permanent safety features are installed?	<input type="checkbox"/> Y <input type="checkbox"/> N
Can a guardrail system be used? If Yes, consider the following: <input type="checkbox"/> Does it meet the strength requirements of O. Reg. 213/91, s. 26.3? <input type="checkbox"/> Is it no more than 30 cm (12 in) from the edge being protected? <input type="checkbox"/> Has the it been installed according to the manufacturer's recommendations? <input type="checkbox"/> If it is made of wood, can it resist all loads that a worker may subject it to?	<input type="checkbox"/> Y <input type="checkbox"/> N
Can floor or roof openings be covered? If Yes, consider the following: <input type="checkbox"/> Does the cover meet the strength requirements of O. Reg. 213/91, s. 26.3 (2)? <input type="checkbox"/> Is it securely fastened? <input type="checkbox"/> Is it adequately identified as a cover?	<input type="checkbox"/> Y <input type="checkbox"/> N
Can an elevated work platform (EWP) be used? If Yes, consider the following: <input type="checkbox"/> Is the EWP on a level surface? <input type="checkbox"/> Is the surface capable of supporting its load? <input type="checkbox"/> Has the worker received fall protection training and been trained in the use of this specific EWP?	<input type="checkbox"/> Y <input type="checkbox"/> N
Can a travel-restraint system be used? If Yes, consider the following: <input type="checkbox"/> Is the system set up to prevent the worker from reaching the fall hazard? <input type="checkbox"/> Does the system meet the requirements of O. Reg. 213/91, s. 26.4? <input type="checkbox"/> Does the anchor point meet the requirements of O. Reg. 213/91, s. 26.7? <input type="checkbox"/> Have other fall hazards in the work area been considered? If not, you may need to use a fall arrest system. <input type="checkbox"/> Has the equipment been certified by the Canadian Standards Association (CSA)? <input type="checkbox"/> Has the equipment and system been inspected before use, as per the manufacturer's instructions and CSA requirements?	<input type="checkbox"/> Y <input type="checkbox"/> N
Can scaffolding or pump jacks be used?	<input type="checkbox"/> Y <input type="checkbox"/> N

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Working at Heights



**Step 3: Take steps to control the fall hazard.**

If you choose this option, you must have a fall rescue plan in place and the workers must be trained on it before work begins—it's the law.

<p>Can a fall arrest system be used? If Yes, consider the following:</p> <ul style="list-style-type: none"> <li><input type="checkbox"/> Is a fall rescue plan in place to rescue a suspended worker? (See Step 7.)</li> <li><input type="checkbox"/> Has the worker been trained in fall protection and the specific fall arrest system being used?</li> <li><input type="checkbox"/> Is the system set up to prevent the worker from hitting an object below? Have other fall hazards in the work area been considered?</li> <li><input type="checkbox"/> Does the fall arrest system meet the requirements of O. Reg. 213/91, s. 26.6?</li> <li><input type="checkbox"/> Does the anchor point meet the requirements of O. Reg. 213/91, s. 26.7?</li> <li><input type="checkbox"/> Is the anchor point located so that the lifeline is at a 90° angle from the edge? If not and the worker fell, they could swing and hit a wall or column or the lifeline could break as it slid across the edge.</li> <li><input type="checkbox"/> Have horizontal lifeline systems been engineered? Have they been installed according to the engineer's requirements?</li> <li><input type="checkbox"/> Has the fall arrest equipment been certified by the CSA?</li> <li><input type="checkbox"/> Has the equipment or system been inspected before use, as per the manufacturer's instructions and CSA requirements?</li> </ul>	<input type="checkbox"/> Y <input type="checkbox"/> N
<p>Can a safety net be used? If Yes, consider the following:</p> <ul style="list-style-type: none"> <li><input type="checkbox"/> Is a fall rescue plan in place to rescue a suspended worker? (See Step 7.)</li> <li><input type="checkbox"/> Do the safety nets meet the requirements of of O. Reg. 213/91, s. 26.8?</li> <li><input type="checkbox"/> Have the safety nets been installed according to the manufacturer's instructions?</li> <li><input type="checkbox"/> Have the safety nets been inspected according to the manufacturer's instructions?</li> </ul>	<input type="checkbox"/> Y <input type="checkbox"/> N
<p>Can any other controls be used? If Yes, describe them:</p>	<input type="checkbox"/> Y <input type="checkbox"/> N



**Step 4: Make a diagram of the location of the fall hazard and include any relevant details.**



**Step 5: Describe the system setup or work procedures.** \_\_\_\_\_



**Step 6: Calculate the fall clearance.** \_\_\_\_\_



**Step 7: Create a fall rescue plan to rescue a suspended worker.** \_\_\_\_\_

Rescue equipment: \_\_\_\_\_ Rescuers' names: \_\_\_\_\_



**Step 8: Get approvals.**

Prepared by \_\_\_\_\_

Approved by \_\_\_\_\_ Date approved \_\_\_\_\_



**Step 9: Create a Worker Sign-off Sheet.**

Workers need to acknowledge that they have read the requirements and understand their responsibilities under the Fall Protection Work Plan.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Working at Heights

## Emergency Response Planning Checklist

Use the checklist on the next two pages as a guide to help you develop the emergency response plan for your workplace. Remember that the plan must be specific to the location where you are working.

When the plan is complete, make sure that everyone involved knows their role.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Working at Heights

## Emergency Response Planning Checklist

Company:	Date:
Completed by:	Site:
Program Administration: (Who's responsible for implementing the plan?)	

	In Progress	Date Completed
Develop an Emergency Response Standard.	<input type="checkbox"/>	
Develop a Site Emergency Plan.	<input type="checkbox"/>	
<ul style="list-style-type: none"> <li>• Identify emergency access routes.</li> </ul>	<input type="checkbox"/>	
<ul style="list-style-type: none"> <li>• Indicate location of first aid stations/boxes and fire extinguishers.</li> </ul>	<input type="checkbox"/>	
<ul style="list-style-type: none"> <li>• Indicate job office(s) and storage facilities (storage for blankets and special rescue equipment).</li> </ul>	<input type="checkbox"/>	
<ul style="list-style-type: none"> <li>• Ensure specialized PPE equipment is on site. (Indicate location.)</li> </ul>	<input type="checkbox"/>	
<ul style="list-style-type: none"> <li>• Ensure sufficient medical aid supplies are available on site (splints, stretchers, etc.) and indicate location.</li> </ul>	<input type="checkbox"/>	
<ul style="list-style-type: none"> <li>• Locate other firefighting equipment (standpipes, Siamese connections, and hydrants).</li> </ul>	<input type="checkbox"/>	
<ul style="list-style-type: none"> <li>• Locate main power supply to the project.</li> </ul>	<input type="checkbox"/>	
<ul style="list-style-type: none"> <li>• Identify the location of emergency phones. (Post emergency list.)</li> </ul>	<input type="checkbox"/>	
<ul style="list-style-type: none"> <li>• Identify nearest hospital or medical centre.</li> </ul>	<input type="checkbox"/>	
<ul style="list-style-type: none"> <li>• Identify worker evacuation route(s) and assembly area(s).</li> </ul>	<input type="checkbox"/>	
<ul style="list-style-type: none"> <li>• Contact local fire, police, and ambulance and provide them with your site plan and list of potential emergencies.</li> </ul>	<input type="checkbox"/>	
<ul style="list-style-type: none"> <li>• Locate services to the project (both above ground and underground).</li> </ul>	<input type="checkbox"/>	
<ul style="list-style-type: none"> <li>• Develop on-site traffic routes.</li> </ul>	<input type="checkbox"/>	
<ul style="list-style-type: none"> <li>• Locate outside materials storage and fabricating areas.</li> </ul>	<input type="checkbox"/>	

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Working at Heights

## Emergency Response Planning Checklist (continued)

	In Progress	Date Completed
• Locate cranes man/material hoists and unloading docks.	<input type="checkbox"/>	
• Locate flammable/combustible materials and cylinder storage.	<input type="checkbox"/>	
• Locate garbage dumpsters and recycling bins.	<input type="checkbox"/>	
• Complete <b>Hazard Identification and Risk Assessment Form*</b>	<input type="checkbox"/>	
• Determine if "high-level" rescue is a possibility.	<input type="checkbox"/>	
• Develop Emergency Response procedures for items identified in your hazard assessment.	<input type="checkbox"/>	
• Ensure that all trades on site keep daily personnel lists. (In the event of a major emergency, check names against personnel gathered in the assembly area.)	<input type="checkbox"/>	
• Include requirements for written notices. (What's required? When? Completed by whom? Who does it go to?) See legal obligations.	<input type="checkbox"/>	
• Identify the emergency response (ER) team and alternates. (Post names.)	<input type="checkbox"/>	
• Provide specialized training for ER team members.	<input type="checkbox"/>	
• Designate a contact person to call necessary emergency services and MOL, MOEE, etc.	<input type="checkbox"/>	
• Select member of ER team to meet and direct emergency services vehicles to incident scene.	<input type="checkbox"/>	
• Select team member to deal with media, MOL, MOEE, etc.	<input type="checkbox"/>	
• Ensure all required rescue equipment/materials are readily available on site.	<input type="checkbox"/>	
• Provide for emergency traffic control person (properly trained).	<input type="checkbox"/>	
• Make provisions for cordoning off the accident scene to protect workers.	<input type="checkbox"/>	
• Ensure someone on the ER team documents where the injured worker has been taken (hospital, medical centre, etc.).	<input type="checkbox"/>	
• Set out method of communicating the plan.	<input type="checkbox"/>	

<b>JH&amp;SC Review:</b>	<b>Approved By:</b>	<b>Date Created:</b>	<b>Date of Last Review:</b>	<b>Rev. No.</b>
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Working at Heights

Safe Work Practice Number

SWP-A15

Version 1.0  
Last Revised: July 12 2022  
Revised by: HSE Department



## Daily Fall Protection Equipment Inspection Checklist

To be completed before the use of fall protection.  
Never use damaged fall protection. Damaged OR defective equipment is to be removed from service!

EQUIPMENT AND USER INFORMATION												
Week Start Date:			Week End Date:			Location & Project #:			Supervisor Name:			
User Name:			WAH / Fall Protection ID #:			Training Card Expiration Date:				Year / Month / Day		
ITEM	MON	TUE	WED	THUR	FRI	SAT	SUN					
<b>HARNESSES</b>												
Inspect for damage, distortion, sharp edges, burrs, cracks and corrosion, rust, burns for the following.	Pass <input type="checkbox"/>	Fail <input type="checkbox"/>										
<ul style="list-style-type: none"> <li>Snap Hook / Connectors</li> <li>Adjustors/Buckles</li> <li>D Ring</li> <li>Webbing/Padding</li> <li>Straps, Stitching</li> <li>Labels</li> </ul>	Serial #											
Lanyard <input type="checkbox"/> Mark if not applicable												
Inspect for damage, rips/cuts, burn marks, frayed or cut stitching, and UV / water damage for the following	Pass <input type="checkbox"/>	Fail <input type="checkbox"/>										
<ul style="list-style-type: none"> <li>Snap Hook/Carabiners</li> <li>Connectors</li> <li>Wire Rope</li> <li>Webbing</li> <li>Ropes, Stitching</li> <li>Labels</li> </ul>	Serial #											
ENERGY ABSORBER <input type="checkbox"/> Mark if not applicable												
Inspect for elongation, tears, excessive soiling, UV damage and illegible label.	Pass <input type="checkbox"/>	Fail <input type="checkbox"/>										
	Serial #											
LIFELINE / SELF RETRACTABLE LANYARD <input type="checkbox"/> Mark if not applicable												
Inspect for damage on Housing component, retraction/extension, locking action, and impact indicator, and labels.	Pass <input type="checkbox"/>	Fail <input type="checkbox"/>										
	Serial #											
ROPE GRAB <input type="checkbox"/> Mark if not applicable												
Inspect for springs, gate open/close function, locking pin, function of safety latch and if teeth in good condition.	Pass <input type="checkbox"/>	Fail <input type="checkbox"/>										
	Serial #											
SIGN OFF	Supervisor Daily Initial											
	Employee Daily Initial											

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Electrical Limits of Approach

Potential Hazards Present	Required Personal Protective Equipment <small>* may be required based on risk – see FLHA form</small>	
Contact with live lines / high voltage	 <b>Safety Glasses with Side Shields</b>	 <b>Class E hard hats</b>
		<b>Electrical Shock Protective Boots</b>  (omega symbol)

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ <u>Demolition workers are not allowed to work on electrical systems connected to power. However, demolition workers may be asked to work in proximity to electrical utilities.</u></li> <li>✓ Work on or near electrical utilities may only be performed by authorized/qualified authorities.               <ul style="list-style-type: none"> <li>○ Before working on any electrical system a safe work plan must be developed and communicated to workers.</li> <li>○ The process of protecting electrical systems by using Hold-offs, if needed, is done by other trades on a project and demolition workers only begin work after systems are de-energized.</li> <li>○ The controlling authority must notified before working on or in close proximity to energized equipment above 750 V</li> <li>○ Safety interlocks must not be removed or bypassed</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not bring any object closer to an energized overhead electrical conductor than the distance specified in the limits of approach chart.</li> <li>✗ Do not touch low voltage lines or wires. Even power lines carrying less than 750 volts can be hazardous.</li> <li>✗ Do not assume the lines are dead.</li> <li>✗ Never ride or climb on equipment or a load when near a power line</li> <li>✗ Do not operate equipment without a signaler in position</li> <li>✗ Do not material or equipment under power lines. If it must be stored there, hang warning signs to prevent other workers from using hoisting equipment to move or lift it.</li> <li>✗ Do not attempt a rescue if you are untrained. Rescue can only be attempted</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Electrical Limits of Approach

- ✓ Contact the utility owner in order to determine the voltage of the overhead conductors
- ✓ Wear approved PPE as noted
- ✓ Determine if it is possible for an excavator or crane to contact an overhead utility
- ✓ Before moving ladders, rolling scaffolds, or elevating work platforms, always check for overhead lines.
- ✓ Check the height of your equipment or load
- ✓ Plan your moves – are there power lines to pass under or avoid?
- ✓ Look out for uneven ground that may cause your vehicle to weave, bob or bounce
- ✓ Think about wind and temperature – they may affect the power line’s height;
- ✓ Install warning devices, visible to the operator near the hazard.
- ✓ Position a signaler with a clear view of the electrical conductor, in full view of the operator.
- ✓ If possible, Contact the utility provider to shut off the power
- ✓ Establish and implement measures to ensure that no part of a vehicle or equipment or its load encroaches on the minimum distance permitted, as listed in the chart below.

safely by a person trained to use special live-line tools.

- ✗ Do not allow excavations to undermine the support required for existing power poles. Contact the electrical utility to determine support required.

Item	Column 1 Nominal phase-to-phase voltage rating	Column 2 Minimum distance
1.	750 or more volts, but no more than 150,000 volts	3.0 m
2.	more than 150,000 volts, but no more than 250,000 volts	4.5 m
3.	more than 250,000 volts	6.0 m

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Electrical Limits of Approach

<p>Note: If the voltage of a line is unknown than the minimum distance permitted is 6m.</p> <ul style="list-style-type: none"> <li>✓ Have copy of the written measures and available to all persons on site</li> </ul> <p><b>If operating equipment in the area of power lines</b></p> <ul style="list-style-type: none"> <li>✓ Ensure adequate warning devices, visible to the operator and warning of the electrical hazard, are positioned in the vicinity of the hazard.</li> <li>✓ The operator shall be provided with written notification of the electrical hazard before beginning the work.</li> <li>✓ A legible sign, visible to the operator and warning of the potential electrical hazard, shall be posted.</li> </ul> <p><b>What to do if you are operating equipment that contacts a power line:</b></p> <ul style="list-style-type: none"> <li>✓ Stay where you are</li> <li>✓ Do not touch anything outside the equipment. You might create another path to the ground for the electrical current.</li> <li>✓ Warn others to stay at least 10 meters away</li> <li>✓ Have someone call 911 or the emergency responders in your area.</li> </ul> <p><b>If you must get out</b></p> <ul style="list-style-type: none"> <li>✓ Only as a last resort, if you must get off the equipment due to fire or other hazards, you must do so without touching the equipment and the ground at the same time.</li> <li>✓ Jump about 45 cm to 60 cm away from the equipment, landing with feet together and arms close to your body</li> </ul>	
---	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Electrical Limits of Approach

Safe Work Practice Number

SWP-A16

<p>✓ Keep your feet together (touching) and shuffle at least 10 meters away. Your heels should never pass your toes.</p>	
--	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- PDI Field Level Hazard Assessment Form ( FLHA)
- PDI Safety Standard 8: Hazard Assessment
- O. Reg. 213/91: Construction Projects s 181.

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Office Environment

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk
<p>Indoor environment: inadequate temperature, humidity, poor air circulation, ventilation system issues.</p> <p>Indoor air contaminants - chemicals, dusts, moulds or fungi, bacteria, gases, vapours, odours.</p>	

DO	DO NOT
<p>Temperature guidelines:</p> <ul style="list-style-type: none"> <li>✓ Winter conditions: optimum temperature of 22°C with an acceptable range of 20-23.5°C</li> <li>✓ Summer conditions: optimum temperature of 24.5°C with an acceptable range of 23-26°C               <ul style="list-style-type: none"> <li>○ In the summer, when outdoor temperatures are higher, it is advisable to keep air-conditioned offices slightly warmer to minimize the temperature discrepancy between indoors and outdoors.</li> </ul> </li> </ul> <p>Humidity guidelines:</p> <ul style="list-style-type: none"> <li>✓ ASHRAE states “there are no established lower humidity limits for thermal comfort”               <ul style="list-style-type: none"> <li>○ Relative humidity levels below 20% can cause discomfort through drying of the eyes and mucous membranes and skin. Low relative humidity levels may also cause static electricity build-up and negatively affect the</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not use scented products</li> <li>✗ Do not block air vents or grilles.</li> <li>✗ Avoid bringing products into the building that could release harmful or bothersome odors or contaminants.</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Office Environment

operations of some office equipment such as printers and computers.

- ✓ Relative humidity levels above 70% may lead to the development of condensation on surfaces and within the interior of equipment and building structures. Higher humidity also makes the area feel stuffy.

### General

- ✓ Comply with the office and building smoking policy.
- ✓ Dispose of garbage promptly and properly.
- ✓ Store food properly.
- ✓ Notify your building or facility manager immediately if you suspect an indoor air quality problem.
- ✓ Place office furniture and equipment with air circulation, temperature control, and pollutant removal functions of the heating, ventilating and air conditioning (HVAC) system in mind.
- ✓ Clean up all water spills promptly, water and maintain office plants properly and report water leaks right away.

### Guidance Documents/ Standards/ Applicable Legislation/ Other:

- CSA Z412-17 Office Ergonomics
- ASHRAE Standard 55-2013
- Indoor Air Quality in Office Buildings: A Technical Guide – Health Canada

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Office Environment

Safe Work Practice Number

SWP-A17

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Manual Lifting

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk – see FLHA form			
Slippery surfaces Tripping hazards Heavy items Awkward positions		<b>Safety Glasses with Side Shields*</b>		<b>Hard Hats*</b>
		<b>Hand protection*</b>		<b>Steel Toed Boots*</b>

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ Size up the load. If you think you need help, ask for it.</li> <li>✓ Ensure that you know your physical limitations and the approximate weight of materials.</li> <li>✓ Consider the use of power equipment or mechanical lifting devices and employ where practical.</li> <li>✓ Obtain assistance in lifting heavy objects.</li> <li>✓ Ensure a good grip before lifting and employ proper lifting technique.</li> <li>✓ Bulky loads should be carried in such a way as to permit an unobstructed view ahead.</li> <li>✓ Be aware of hazardous and unsafe conditions.</li> <li>✓ Get a good footing.</li> <li>✓ Bend your knees and get a good grip on the object to be lifted.</li> </ul>	<ul style="list-style-type: none"> <li>✗ Avoid reaching out. Handle heavy objects close to the body. Avoid a long reach out to pick up an object.</li> <li>✗ Do not carry pipes, conduit, reinforcing rods and other conductive materials on the shoulder near exposed live electrical equipment or conductors.</li> <li>✗ Do not place objects on the floor if they must be picked up again later.</li> <li>✗ Do not twist unnecessarily. Turn your feet, not your hips or shoulders. Leave enough room to shift your feet so as not to twist.</li> <li>✗ Do not be tempted at the last moment to swing the load onto the deck or shelf by bending or twisting your back</li> <li>✗ Do not bend from the waist</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1




# Manual Lifting

<ul style="list-style-type: none"> <li>✓ Keep your back straight, lift with your legs, and keep the object being lifted close to your body.</li> <li>✓ Keep your balance.</li> <li>✓ To put the object down again, Keep your back straight and bend your knees, keeping the object close to your body until it is placed in a secure position.</li> </ul>	
---	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Ontario Regulation for Construction Projects - Sec. 45-66

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

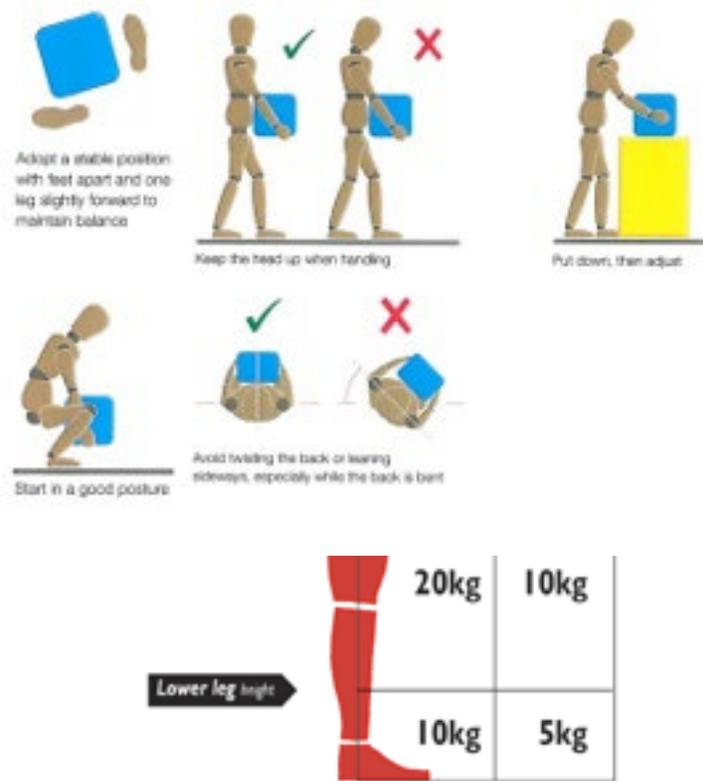

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Fire Protection & Prevention

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk – see FLHA form	
Fire Explosion	 <b>Safety Glasses with Side Shields*</b>	 <b>Hard Hats*</b>
	 <b>Hand protection*</b>	 <b>Respirator*</b>
	 <b>Steel Toed Boots*</b>	 <b>Fire Extinguisher</b>

DO	DO NOT															
<ul style="list-style-type: none"> <li>✓ Workers who handle flammable and combustible substances will be suitably trained.</li> <li>✓ Waste material contaminated with a solvent, oil, grease, paint, or other flammable substance shall be placed in closed metal containers before disposal and shall not be stored in work areas.</li> <li>✓ Gasoline and volatile solvents and/or other flammable/combustible solutions must be stored in containers that are clearly labelled, approved for their contents and located in a safe place away from any source of open flame or spark.</li> <li>✓ Flammable and combustible materials must be stored separately from ignition sources and in fire resistant cabinets or a designated storage room or building.</li> <li>✓ Where work involves the use of a flammable liquid, vapour, or gas, the concentration of the liquid, vapour, or gas in the work area shall not be greater than 10% of the lower explosive limit (LEL) of the substance involved.</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not use the wrong extinguisher to fight a fire. It can have serious results.               <ul style="list-style-type: none"> <li>○ On a construction site do not use a fire extinguisher with a rating of less than 4A 40 BC</li> </ul> <p>For example, if a water- based extinguisher is used on a flammable liquid fire (Class B fire), the fire may flare up, spread, and cause personal injury to the user and others. If a water-based extinguisher is used to fight a fire, in or near electrical equipment (Class C fire), the user could suffer an electric shock</p> </li> </ul> <table border="1" style="margin: 10px auto; width: 80%; border-collapse: collapse;"> <thead> <tr style="background-color: #d9ead3;"> <th>Fuel Sources</th> <th>Class of Fire</th> <th>Type of Extinguisher (Extinguishing Agent)</th> </tr> </thead> <tbody> <tr> <td>Ordinary combustibles <small>(e.g. trash, wood, paper, cloth)</small></td> <td style="text-align: center;">A</td> <td>Water; chemical foam; dry chemical<sup>1</sup></td> </tr> <tr> <td>Flammable liquids <small>(e.g. oils, grease, tar, gasoline, paints, thinners)</small></td> <td style="text-align: center;">B</td> <td>Carbon dioxide (CO<sub>2</sub>); halon<sup>2</sup>; dry chemical; aqueous film forming foam (AFFF)</td> </tr> <tr> <td>Electricity <small>(e.g. live electrical equipment)</small></td> <td style="text-align: center;">C</td> <td>CO<sub>2</sub>; halon; dry chemical</td> </tr> <tr> <td>Combustible metals <small>(e.g. magnesium, titanium)</small></td> <td style="text-align: center;">D</td> <td>Dry powder (suitable for the specific combustible metal involved)</td> </tr> </tbody> </table> <ul style="list-style-type: none"> <li>✗ Any source of ignition is prohibited in areas where flammable and combustible sources are stored. This includes smoking, sparks from welding or grinding, open-flames etc.</li> <li>✗ Do not let waste materials accumulate on the job</li> </ul>	Fuel Sources	Class of Fire	Type of Extinguisher (Extinguishing Agent)	Ordinary combustibles <small>(e.g. trash, wood, paper, cloth)</small>	A	Water; chemical foam; dry chemical <sup>1</sup>	Flammable liquids <small>(e.g. oils, grease, tar, gasoline, paints, thinners)</small>	B	Carbon dioxide (CO <sub>2</sub> ); halon <sup>2</sup> ; dry chemical; aqueous film forming foam (AFFF)	Electricity <small>(e.g. live electrical equipment)</small>	C	CO <sub>2</sub> ; halon; dry chemical	Combustible metals <small>(e.g. magnesium, titanium)</small>	D	Dry powder (suitable for the specific combustible metal involved)
Fuel Sources	Class of Fire	Type of Extinguisher (Extinguishing Agent)														
Ordinary combustibles <small>(e.g. trash, wood, paper, cloth)</small>	A	Water; chemical foam; dry chemical <sup>1</sup>														
Flammable liquids <small>(e.g. oils, grease, tar, gasoline, paints, thinners)</small>	B	Carbon dioxide (CO <sub>2</sub> ); halon <sup>2</sup> ; dry chemical; aqueous film forming foam (AFFF)														
Electricity <small>(e.g. live electrical equipment)</small>	C	CO <sub>2</sub> ; halon; dry chemical														
Combustible metals <small>(e.g. magnesium, titanium)</small>	D	Dry powder (suitable for the specific combustible metal involved)														

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Fire Protection & Prevention

- ✓ When transferring flammable and combustible liquids from one conductive container to another, grounding and bonding must be used to prevent the build-up of static electricity



- ✗ Do not stockpile material in stairways stairwells or exits.

- ✓ Workers that may use an extinguisher must be trained in the correct use of a fire extinguisher using the PASS method
- ✓ Class B (or ABC) fire extinguisher must be readily available while working with or near flammable and combustible liquids
- ✓ Refer to Hot Work SWP for more details when ignition sources are present
- ✓ Flammable and combustible substances must be stored in areas away from substances that may cause a reaction, such as an oxygen tank.
- ✓ For a fire extinguisher to be effective, the following conditions must be met:
  - the extinguisher must be the correct size and right for the type of fire (see chart below)
  - it must be located where it can be easily reached;
  - it must be in good working order;

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Fire Protection & Prevention

<ul style="list-style-type: none"> <li>• the fire must be discovered while it is still small; and</li> <li>• the person using the extinguisher must be trained to use it properly</li> <li>✓ Fire extinguishers must be maintained and inspected according to manufacturer’s specifications including being inspected at least once a month and more often where needed. Inspections are visual checks to determine that: <ul style="list-style-type: none"> <li>• The extinguisher is well supported: Can be easily reached</li> <li>• Location signs are clear</li> <li>• Class markings are clear</li> <li>• It is in working condition: – Discharge opening is clear – Is fully charged – Has not been tampered with – Is not damaged – the ring pin is in place - The seal is intact.</li> </ul> </li> <li>✓ Ensure annual checkup and servicing is completed <ul style="list-style-type: none"> <li>• Testing and servicing is usually carried out by a service agency.</li> </ul> </li> </ul>	
--	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

<ul style="list-style-type: none"> <li>• Ontario Fire Code (O.Reg. 213/07)</li> <li>• Ontario Building Code (O.Reg. 350/06)</li> <li>• Ontario Regulations for Industrial Establishments: <ul style="list-style-type: none"> <li>○ Storage of Flammable Liquids (s.22)</li> <li>○ Portable containers for dispensing flammable liquids (s.23)</li> </ul> </li> <li>• Canadian Electrical Code Part 1 (C22.1-C22.1-09)</li> <li>• Ontario Electrical Safety Code (24th edition/2009) (Section 18: Hazardous Locations)</li> <li>• WHMIS (RBO 1990, Regulation 860)</li> <li>• PDI Hot Work SWP</li> </ul>
--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Fire Protection & Prevention

## SELECTION CHART

Type of Extinguisher	Multi-Purpose ABC Stored Pressure	Halotron I Stored Pressure	Water Stored Pressure	Water Mist Distilled Water	Wet Chemical Stored Pressure	Sodium Bicarbonate BC Stored Pressure	Carbon Dioxide	Class D Dry Powder
Sizes Commonly in Use	2 1/2 to 20 lbs.	2 1/4 to 15 lbs.	2 1/2 Gallon	2 1/2 Gallon	6 liter	2 lb. to 20 lbs.	5 to 20 lbs.	30 lbs.
Classification of Fires	A	Yes	Yes	Yes	No	No	No	No
	B	Yes	Yes	No	No	Yes	Yes	No
	C	Yes	Yes	No	Yes	No	Yes	No
	D	No	No	No	No	No	No	Yes
	K	No	No	No	No	Yes	No	No
Existing Agent	MonoAmmonium Phosphate Base	HydroChloro Fluoro Carbon with Argon	Water	Distilled Water	Potassium Acetate and Citrate	Sodium Bicarbonate Base	Carbon Dioxide	Sodium Chloride or Copper
Approximate Horizontal Range	9ft. 21ft.	6 to 18 ft.	30 to 45 ft.	10 to 12 ft.	10 to 12 ft.	5 to 21 ft.	4 8 1/2 ft.	8 to 10 ft.
Approximate Discharge Time	9 to 26 Seconds	9 to 13 Seconds	50 Sec.	80 Sec.	54 Seconds	9 to 26 Seconds	8 to 20 Seconds	28 Seconds

Class A Fires in ordinary combustible materials such as wood, cloth, paper, rubber and plastics.

Class B fires are fires in flammable liquids, gases and greases.

Class C fires are fires which involve energized electrical equipment where the electrical nonconductivity or the extinguishing media is of importance.

Class D fires are fires in combustible metals, such as magnesium, titanium, sodium, zirconium and potassium.

Class K fires in kitchen hazardous areas.






This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Office Ergonomics

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk			
Repetitive stress Uncomfortable positions Eye strain Static forces		<b>Foot rest*</b>		<b>Wrist pad*</b>
		<b>Task Light*</b>		<b>Glare screen*</b>

DO	DO NOT
<p>✓ Perform a basic ergonomic check of your workstation</p> <div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>Balanced head, not leaning forward</p>  <p>Arms relaxed by your side</p>  <p>Forearms parallel to desk</p>  <p>Sit back in chair ensuring good back support</p>  </div> <div style="width: 45%;"> <p>Screen approximately arms length from you</p>  <p>Top of screen about eye level</p>  <p>Space behind knee</p>  <p>Feet flat on floor or on a footrest</p>  </div> </div>  <p>✓ Report any discomfort immediately.</p> <p>✓ Check that you are using good posture. This will reduce the stress on your body while seated. Ask a co-worker who works near you to observe your posture as you work.</p>	<p>✗ Do not use awkward neck postures. Proper placement of your phone and the use of a headset or speaker phone will make it much easier for you to refer to files or use the computer while you're on the phone.</p> <p>✗ Do not focus your eyes on objects at the same distance and angle for prolonged periods of time can also contribute to eye strain</p> <p>✗ Do not use a desk or chair that's not the proper height for your size. Everyone is different; find what works for you.</p> <p>✗ Do not keep your monitor too close or too far away, or hunch over a laptop. This can cause eye strain and headaches in addition to neck and back pain.</p> <p>✗ Don't place your computer monitor above your head. You want your monitor to be level</p> <div style="text-align: right;"> <p> Incorrect position</p>  </div>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Office Ergonomics

<ul style="list-style-type: none"> <li>✓ Adjust your chair to support your back and minimize awkward postures that can lead to muscle tension, fatigue, and soreness.</li> <li>✓ Rearrange your workstation layout to avoid repetitive, prolonged, and awkward movements when you use the monitor, keyboard, mouse, documents, and other items.</li> <li>✓ Improve your lighting, and eliminate or control the sources of glare that cause eyestrain, fatigue, and sore muscles.</li> <li>✓ Review your job to see if there are ways to improve its design, increase your comfort level, and reduce your risk of injury. Discuss your ideas with your supervisor.</li> <li>✓ Organize your workday to include a variety of tasks, breaks, and exercises. These allow you to vary your posture, rest your muscles, and minimize muscle tension and soreness.</li> <li>✓ Talk to your supervisor, a health and safety committee member, or your worker health and safety representative about changes to your workstation that you can't make yourself.</li> <li>✓ Exercise regularly and maintain your fitness to help counterbalance the effects of computer work.</li> <li>✓ Eye specialists recommend the "20-20-20 rule". At least every 20 minutes, take a 20-second break and look at something 6 metres (20 feet) away.</li> </ul>	<p>with your head so you don't have to crane your neck</p> <ul style="list-style-type: none"> <li>✗ Don't over-extend your wrists or any other joint</li> <li>✗ Don't let your feet dangle! Adjust the height of your chair so your feet can hit the floor.</li> <li>✗ Do not twist your back to reach for something</li> <li>✗ Do not sit for a prolonged period of time. You should stand up every half hour just to get the blood flowing through your neck, back &amp; legs</li> </ul>
--	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Office Ergonomics

Safe Work Practice Number

SWP-A20

<p>✓ Keep in mind that the recommended level of light in offices is 300 - 500 lux.</p>	
--	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**


- Occupational Health and Safety Act, R.S.O. 1990, c. O.1
- Reg. 851 - Industrial Establishments: Sections 11, 21, 45
- Canadian Standards Association: Guideline on Office Ergonomics CSA-Z412-00 (R2005)
- WorkStation Ergonomics Checklist

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Office Ergonomics

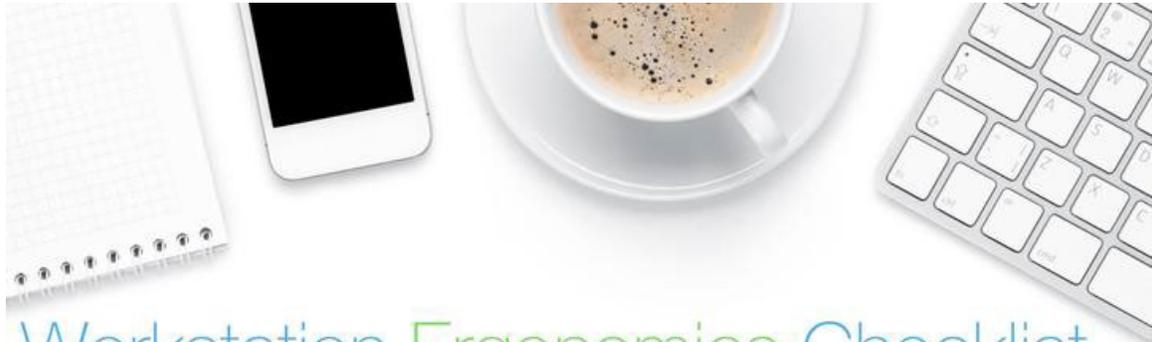

## Workstation Ergonomics Checklist

Use this simple checklist to ensure your workstation is setup correctly for comfort and productivity.

- Keyboard and mouse are positioned in front of body and within easy reach?
- Mouse is positioned close to keyboard as possible?
- Keyboard feet are adjusted so wrist are neutral (flat) when using keyboard?
- Monitor height is set so top of the monitor is in line with your eyes?
- Monitor is positioned approximately arms length away?
- Height of chair is adjusted so that elbows are slightly above desk surface and forearms are parallel to the desk surface?
- Feet are flat on the floor or supported by a footrest?
- Backrest is adjusted so lumbar support is in the groove of your lower back?
- Frequently used items (phone, materials etc) are within easy reach?
- Documents are positioned in front of keyboard and monitor?

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Slip, Trip & Fall Prevention

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk – see FLHA form	
<p>Slippery conditions Trips hazards Falls hazards</p>	 <p><b>Traction Aids*</b></p>	 <p><b>Appropriate footwear</b></p>

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ Flooring should be regularly maintained to eliminate tripping hazards, such as bunched carpet, chipped tile or hardwood, missing tiles, etc. Replacing floors, installing mats, or resurfacing floors can help to improve safety and reduce the risk of falling</li> <li>✓ Parking lots, walkways, stairs, and other high traffic areas should be monitored frequently for any of the identified hazards i.e. ice, wet conditions, gravel etc. and control measures should be put in place to remove/eliminate these hazards.</li> <li>✓ Any lighting that is not working should be repaired immediately. Any identified dark areas should be well lit to avoid tripping over hazards, or slipping due to a change in floor condition.</li> <li>✓ Walk, don't run.</li> <li>✓ Clean up after yourself.</li> <li>✓ If you see a tripping hazard, clean it up or fix it. Otherwise, tell your supervisor</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not leave a mess behind after completing a task by not following workplace housekeeping standards</li> <li>✗ Do not put boxes in walkways, on the stairs, or in high traffic areas , use designated storage spaces and racks</li> <li>✗ Do not take shortcuts from approved walkways.</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Slip, Trip & Fall Prevention

<ul style="list-style-type: none"> <li>✓ Clean up any spills immediately and investigate its cause to prevent reoccurrence</li>   <li>✓ Keep walkways and floors clear of boxes, extension cords and litter</li>   <li>✓ Sweep debris from floors</li>   <li>✓ Move anything that is stored on or near stairways or report the hazard to a supervisor</li>   <li>✓ Mark any temporarily made wet areas with signs or limit pedestrian access</li>   <li>✓ Secure mats, rugs, and carpets to prevent slippage and overlaps</li>   <li>✓ Make sure to always close file cabinet or storage drawers</li>   <li>✓ Cover cables that cross over walkways</li>   <li>✓ Keep walkways and work areas well lit for good visibility</li>   <li>✓ Select proper footwear, it is important that it be appropriate safe footwear for the work environment (e.g., slip-resistant safety shoes or boots in an agricultural work environment, factory or warehouse).</li>   <li>✓ Take your time and pay attention to where you are going</li>   <li>✓ Adjust your pace to suit the walking surface (e.g., wet, rough, icy, sloped or cluttered)</li> </ul>	
--	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Slip, Trip & Fall Prevention

<ul style="list-style-type: none"> <li>✓ Make wide turns at corners</li> <li>✓ Use a flashlight if you enter a dark room where there is no light</li> <li>✓ When carrying a load, be sure that there is clear visibility over or around the load</li> <li>✓ Close cabinet doors and drawers</li> <li>✓ Hold handrail when going up or down stairs</li> <li>✓ Floor openings should be guarded by a standard fixed railing surrounding the hole</li> <li>✓ Walk when using stairways – don't run</li> <li>✓ Closed stairways should have at least one handrail</li> <li>✓ Keep stairways uncluttered</li> <li>✓ Keep platforms or steps on machinery clean and dry</li> <li>✓ Use handholds, handrails and steps provided on riding machinery (e.g., lift trucks, tractors) when mounting or dismounting, using the 3-point system (both hands and one foot or one hand and two feet on the machine at all times)</li> <li>✓ Cleanup and properly dispose of spilled materials such as chemicals, oils, inks, coolants, grease, etc.</li> </ul>	
--	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Slip, Trip & Fall Prevention

Safe Work Practice Number

SWP-A21

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Canadian Centre for Occupational Health and Safety (CCOHS)
- PDI Safe Work Practice : Guardrails
- R.R.O. 1990, Reg. 851: Industrial establishments section 11.

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Lightning Safety

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk – see FLHA form
<p>Ground current Contact (with an object struck by lightning) Direct strike Blunt trauma</p>	 <p><b>Lightning Detector*</b></p>

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ Use 30-30 Rule               <ul style="list-style-type: none"> <li>○ 30 Seconds: Count the seconds between seeing the lightning flash and hearing the thunder clap. Each second represents about 300 meters. If this time is 30 seconds or less, then the lightning storm is less than 10km away and there is an 80% chance that the next strike will happen within that 10km. Seek shelter immediately. Preferably in a building, all-metal vehicle (not a convertible) or in a low-lying area.</li> <li>○ 30 Minutes: After seeing the last lightning flash or thunder clap, wait 30 minutes before leaving shelter. More than half of lightning deaths occur after the thunderstorm has passed. Stay in a safe area until you are sure the threat has passed.</li> </ul> </li> <li>✓ Shutdown cranes - lower the boom if possible, if lightning conditions are present.</li> <li>✓ When a thunderstorm threatens, get inside a home or large building (That's the best choice)</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not wait for lightning to strike nearby before taking cover</li> </ul> <p>If caught outside in a thunderstorm:</p> <ul style="list-style-type: none"> <li>✗ Do not be the tallest object - Lightning is likely to strike the tallest objects in a given area.</li> <li>✗ Do not remain in open areas, such as fields</li> <li>✗ Do not stay near isolated tall trees, hilltops, utility poles, cell phone towers, cranes, large equipment, ladders, scaffolding, or rooftops.</li> <li>✗ Do not lie flat on the ground.</li> <li>✗ Do not shelter in sheds, pavilions, tents, or covered porches as they do not provide adequate protection from lightning</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Lightning Safety

<p>or inside an all-metal (hard top) vehicle with the windows rolled up.</p> <ul style="list-style-type: none"> <li>✓ Stay away from windows, sinks, toilets, tubs, showers, electric boxes, outlets and appliances. Lightning can flow through these systems and “jump” to a person.</li> <li>✓ If you are inside a vehicle during lightning avoid parking under trees or power lines that may topple over during a storm.</li> <li>✓ Be aware of downed power lines that may be touching your vehicle. You are safe inside your vehicle however; you may receive a shock if you step outside.</li> </ul>	
--	--

<b>Guidance Documents/ Standards/ Applicable Legislation/ Other:</b>
<ul style="list-style-type: none"> <li>• Ontario Reg. 213/91: CONSTRUCTION PROJECTS</li> <li>• Canadian Lightning Danger Map <a href="https://weather.gc.ca/lightning/index_e.html">https://weather.gc.ca/lightning/index_e.html</a></li> </ul>

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Risk of Violence

Safe Work Practice Number

SWP-A23

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk – see FLHA form			
Violence Theft Vandalism		<b>Safety Glasses with Side Shields</b>		<b>Hard Hats *</b>
		<b>Hand protection*</b>		<b>Hearing Protection *</b>
		<b>Steel Toed Boots*</b>		<b>Hi Visibility Clothing*</b>

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ Include violence in the daily risk assessment process (FLHA) and in JHAs.</li> <li>✓ Be aware of work factors, processes, and interactions that can put people at increased risk from workplace violence. Examples include:               <ul style="list-style-type: none"> <li>○ Working with the public.</li> <li>○ Working with unstable or volatile persons (e.g. social services, or criminal justice system employees).</li> <li>○ Working alone, in small numbers or in isolated or low traffic areas (e.g. an isolated reception area, washrooms, storage areas, utility rooms).</li> <li>○ Having a mobile workplace</li> <li>○ Working during periods of intense organizational change (e.g. strikes, downsizing).</li> </ul> </li> <li>✓ Recognize that risk of violence may be greater at certain times of the day, night or year. For example:</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not enter any situation or location where you feel threatened or unsafe.</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Risk of Violence

<ul style="list-style-type: none"> <li>○ late hours of the night or early hours of the morning</li> <li>○ during the holidays</li> <li>○ pay days</li> <li>○ performance appraisals</li> </ul> <ul style="list-style-type: none"> <li>✓ The risk of violence may increase depending on the geographic location of the workplace. For example: <ul style="list-style-type: none"> <li>○ near buildings or businesses that are at risk of violent crime (e.g. bars, banks)</li> <li>○ in areas isolated from other buildings or structures</li> </ul> </li> <li>✓ Review any history of violence in your own workplace.</li> <li>✓ Ask others about their experiences, and whether they are concerned for themselves or others.</li> <li>✓ Review any incidents of violence by consulting existing incident reports, first aid records, and health and safety committee records.</li> <li>✓ Determine whether your workplace has any of the risk factors associated with violence.</li> <li>✓ Conduct a visual inspection of your workplace and the work being carried out. Focus on the workplace design and layout, and your administrative and work practices.</li> <li>✓ Use adequate exterior lighting around the workplace and near entrances.</li> </ul>	
---	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Risk of Violence

<ul style="list-style-type: none"> <li>✓ Strategically place fences to control access to the workplace</li> <li>✓ Let your supervisor or co-workers know where and when you are expected somewhere.</li> <li>✓ Identify a designated contact and a back-up.</li> <li>✓ Keep your designated contact informed of your location and consistently adhere to the call-in schedule.</li> <li>✓ Check the credentials of clients.</li> <li>✓ Use the "buddy system", especially when you feel your personal safety may be threatened.</li> </ul>	
--	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Occupational Health and Safety Act, R.S.O. 1990, c. O.1
- PDI Field Level Hazard Assessment Form ( FLHA)
- Job Hazard Analysis (JHA) Form

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Working at Night

Safe Work Practice Number

SWP-A24

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk – see FL form			
Violence Theft Vandalism		<b>Safety Glasses with Side Shields</b>		<b>Hard Hats *</b>
		<b>Hand protection*</b>		<b>Hearing Protection *</b>
		<b>Steel Toed Boots*</b>		<b>Hi Visibility Clothing*</b>

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ Always let a friend, family member or security guard know you are working late and when you expect to leave.</li> <li>✓ Check-in procedures. See PDI SWP Working Alone for more information.</li> <li>✓ Use the "buddy system". Arrange to work late on the same night as a friend or colleague.</li> <li>✓ Plan ahead and think about which areas are safe where you can retreat to and/or call for help.</li> <li>✓ Before it is dark outside, move your car to a well-lit area that is close to your building or a parking lot attendant.</li> <li>✓ Before your co-workers leave, check that all the doors and windows are locked and make sure nobody is in the washrooms and storage rooms.</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not enter any situation or location where you feel threatened or unsafe.</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Working at Night

<ul style="list-style-type: none"> <li>✓ If you enter a room and suspect that someone might be inside, do not call out. Back out quietly and go to a safe area with a lockable door. Call for help.</li> <li>✓ If you encounter someone you don't know, indicate that you are not alone. Say "my supervisor will be right here and will be able to help you".</li> <li>✓ If you suspect someone is lurking outside, call the police or security officers.</li> <li>✓ Ask your employer to consider providing safe transportation home or to parking areas after hours. Consider designating parking spots that are close to the building and well lit for those who work after hours.</li> <li>✓ Be aware of the services offered by your local transit company for after-hours commuters (e.g., they may have a "request stop" service that allows commuters to get off anywhere along the route after dark, rather than at a designated stop).</li> </ul>	
---	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Occupational Health and Safety Act, R.S.O. 1990, c. O.1
- PDI Field Level Hazard Assessment Form (FLHA)
- Job Hazard Analysis (JHA) Form
- PDI SWP: Working Alone

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Pressurized Water

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk – see FLHA form	
<p>High pressure water can cause:</p> <ul style="list-style-type: none"> <li>• Injuries from the water stream</li> <li>• Projectile debris carried in the water.</li> <li>• Micro-organisms can be injected into the body through an injury site</li> <li>• Removal of chemical substances from the surface to be cleaned</li> </ul> <p>Additional risks include</p> <ul style="list-style-type: none"> <li>• Awkward positions</li> <li>• Musculoskeletal injury</li> <li>• Working around machinery / pumps</li> <li>• High noise levels</li> </ul>		<p><b>Safety Glasses</b></p>
		<p><b>Steel Toed Boots</b></p>
		<p><b>Face Shield*</b></p>
		<p><b>Hard Hat*</b></p>
	<p><b>Hand Protection</b></p>	 <p><b>Protective Clothing*</b></p>
	<p><b>Hearing Protection</b></p>	

DO	DO NOT
<p>Pressurized water systems have multiple applications for surface cleaning and even material cutting.</p> <ul style="list-style-type: none"> <li>✓ Prior to using pressurized water, workers are required to have equipment specific safety training based on the manufacturer’s instructions for use.</li> <li>✓ Perform a pre-use inspection</li> <li>✓ Maintain area free of loose debris</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not point high pressure wands in the direction of a worker</li> <li>✗ Do not use any hoses that have obvious signs of damage including               <ul style="list-style-type: none"> <li>○ Kinks</li> <li>○ Crushing, stretching or blistering</li> <li>○ Rusted or broken reinforcing wires</li> </ul> </li> <li>✗ Do not secure small objects to be washed by hand.</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Pressurized Water

<ul style="list-style-type: none"> <li>✓ Required PPE for any pressurized water application must include eye protection (goggles or face shield).</li> <li>✓ Water discharge must be stopped while workers walk and or change positions to avoid accidental contact with body parts</li> <li>✓ Electrical systems in the area of water application must be isolated/disconnected.</li> <li>✓ Where possible perform pressure-washing activities apart from other personnel.</li> <li>✓ Additional protection of electrical and other equipment may be necessary to prevent damaged from water infiltration</li> <li>✓ Use only equipment, hoses, fittings, couplers and accessories specifically designed or intended for use with high pressure washing systems.</li> <li>✓ Plan your work activities to provide reasonable access. Overhead work should be avoided.</li> <li>✓ Hoses should be laid out to avoid areas of frequent foot traffic or areas where mobile equipment may cause damage to the hose.</li> <li>✓ SDS must be reviewed prior to use of any detergents or other additives used with high pressure water</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not use the jetting gun as a pry bar or in any other fashion that would place undue stress on any part of the gun.</li> <li>✗ Do not leave a high pressure gun unattended</li> <li>✗ Never use a device or tool to hold down the trigger. The trigger must be operated by hand only.</li> </ul>
--	---

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Pressurized Water

Safe Work Practice Number

SWP-A25

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- [WHMIS Regulation - Ontario](#)
- O. Reg. 213/91: CONSTRUCTION PROJECTS

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Emergency Response

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk - see FLHA form	
Blood Borne Pathogens Hazards associated with the specific activity / site	 <b>Rubber Gloves</b>	 <b>CPR MASK</b>
	 <b>Fire extinguisher</b>	 <b>First Aid Kit</b>

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ Ensure that all potential emergencies are identified for the project</li> <li>✓ An emergency response plan document must be completed for every project using the template provided by the safety department. The template requires:               <ul style="list-style-type: none"> <li>○ Map to nearest hospital</li> <li>○ First aid supplies location</li> <li>○ Fire extinguisher locations</li> <li>○ Identification of first aid personnel                   <ul style="list-style-type: none"> <li>▪ The number and qualifications of first aid personnel is determined by applicable legislation.</li> </ul> </li> <li>○ Contact information</li> </ul> </li> <li>✓ If the company is not the constructor – the site may reference the constructors emergency plan, provided we ensure that the constructor’s emergency response plan contains at least the same information.</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not talk to the media or post on social media, unless authorized</li> <li>✗ Do not provide any assistance for which you are not comfortable or trained to do.</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January31, 2020	November 15 <sup>th</sup> 2022	1



# Emergency Response

<ul style="list-style-type: none"> <li>✓ Only senior management are permitted to talk the media.</li> <li>✓ A First aid kit shall be readily available. <ul style="list-style-type: none"> <li>○ The minimum content of the first aid kit is determined applicable legislation. <ul style="list-style-type: none"> <li>▪ In Ontario, the number of personnel onsite determines the contents.</li> </ul> </li> </ul> </li> <li>✓ All workers are to be provided training on the emergency response plan <ul style="list-style-type: none"> <li>○ This can be done via a documented tool box meeting</li> <li>○ Any unique procedures unique to the project must be reviewed before work begins</li> </ul> </li> <li>✓ The emergency response plan must be updated whenever changes to the operations, equipment and/or personnel occur.</li> <li>✓ If you discover a medical emergency: <ul style="list-style-type: none"> <li>○ Dial 911, Give the address, location of the fire, your name, city and telephone number.</li> <li>○ Contact a designated First aid person</li> <li>○ Bring the first aid kit and AED (if available) to the scene.</li> <li>○ Provide further assistance as directed by the qualified first aid personnel until directed by a medical health professional</li> </ul> </li> </ul>	
--	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January31, 2020	November 15 <sup>th</sup> 2022	1



# Emergency Response

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Ontario Regulations for Industrial Establishments:
- Ontario First Aid Regulation 1101
- PDI Emergency Response Plan Template

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January31, 2020	November 15 <sup>th</sup> 2022	1



# Forest Fire Prevention

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk	
Fire Smoke / particulates	 Safety Boots*	 Gloves *
	 Hard Hat*	 Safety *Glasses
	 Hearing Protection*	 High Visibility* Clothing

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ In cases where Forest Fires may occur, ensure that a fire prevention and preparedness plan is completed before work begins and includes key sections such as: operations information, fire prevention, fire preparedness, measures and communications.</li> <li>✓ Be aware of fire prevention and suppression measures as well as recognizing hazards that could have the potential to ignite flammable material.</li> <li>✓ Have fire suppression equipment available while conducting operations.</li> <li>✓ If mechanical equipment is operating on the site, a fire extinguisher should be located on each piece of equipment or within 5 meters of it.</li> <li>✓ Complete a fire risk assessment to determine the fire risk category of the work area. The</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not discard cigarettes, matches, and smoking materials from moving vehicles. Be certain to completely extinguish cigarettes before disposing of them.</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# Forest Fire Prevention

<p>fire risk categories are based on the potential for the operation to create a spark or other sources of ignition. The following fire risk categories are established for industrial operations, each category indicating a different level of risk for industrial operations to cause a fire to ignite in a forest area:</p> <ul style="list-style-type: none"> <li>(1) Very high fire risk operations;</li> <li>(2) High fire risk operations;</li> <li>(3) Moderate fire risk operations;</li> <li>(4) Low fire risk operations.</li> </ul> <p>✓ If the risk of fire danger is high, take all reasonable precautions to modify work activities to reduce the risk of fire ignition. Examples of prevention methods include:</p> <ul style="list-style-type: none"> <li>○ increasing fire suppression equipment</li> <li>○ Modifying hours of operation.</li> </ul> <p>✓ Ensure that a valid permit is obtained for an outdoor fire, when operations are outside of the restricted fire zone of the fire season</p> <p>✓ Keep permits at the location of the activity authorized by the permit.</p>	
---	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- O. Reg. 213/91: CONSTRUCTION PROJECTS
- Ontario Forest Fires Prevention Act, R.S.O. 1990, c. F.24

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# Structural Demolition

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk	
Unplanned structural failure Dust / particulates Noise Sharps Pinch points Uneven surfaces Weather	 <b>Safety Boots</b>	 <b>Gloves</b>
	 <b>Hard Hat</b>	 <b>Safety Glasses</b>
	 <b>Hearing Protection</b>	 <b>High Visibility Clothing</b>

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ The Ontario Building Code requires an engineer to oversee the demolition of a building:                             <ul style="list-style-type: none"> <li>○ greater than 3 storeys in building height or 600 m<sup>2</sup> in building area</li> <li>○ if a building structure contains pre-tensioned or post-tensioned members</li> <li>○ if a building being demolished extends below the footings of adjacent buildings</li> <li>○ or for a building where explosives or lasers are to be used</li> </ul> </li> <li>✓ Rubbish, debris, and other materials from demolition on a project is only permitted to fall or may be dropped into an enclosed designated area to which people do not have access (drop zone).</li> <li>✓ All gas, electrical, and other services that may endanger persons who have access to a building or structure shall be shut off and disconnected before, and shall remain shut</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not demolish any exterior wall of a building or structure until all glass is removed from windows, doors, interior partitions, and components containing glass or is protected to prevent the glass from breaking during the demolition.</li> <li>✗ Do not have personnel in the structure being demolished unless approved by a structural engineer.</li> <li>✗ Do not enter any damaged structure unless it has been assessed by a professional engineer and deemed safe.</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# Structural Demolition

<p>off and disconnected during, the demolition, dismantling, or moving of the building or structure.</p> <ul style="list-style-type: none"> <li>✓ All toxic, flammable, or explosive substances shall be removed from a building or structure that is to be demolished, dismantled, or moved.</li> <li>✓ Use appropriate dust mitigation measures (i.e. wetting) to reduce dust / particulates.</li> <li>✓ Ensure appropriate measure are put in place to protect adjacent building and structures i.e. debris screens, bracing, shoring.</li> <li>✓ Ensure that all individuals including public, trespassers, other trades and personnel are removed form the building prior to start.</li> <li>✓ If the demolition or dismantling of a building or structure is discontinued, barriers shall be erected to prevent access by people to the remaining part of the building or structure</li> </ul>	
--	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- O. Reg. 213/91: CONSTRUCTION PROJECTS
- Ontario Building Code
- PDI SWP-A23 Risk Of Violence
- PDI SWP-A06 Air Gap
- PDI SWP-A18 Manual Lifting
- PDI SWP-O04 Noise
- PDI SWP-O08 Dust

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# Short Service Worker (SSW)

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk – see FLHA form	
<p>Statistics indicate that a significant number of injuries experienced in industry are sustained by individuals within their first 6 months of employment. Short Service Workers may have:</p> <ul style="list-style-type: none"> <li>• Lack of knowledge</li> <li>• Lack of skill</li> <li>• Lack of experience</li> <li>• Lack awareness of our safety culture</li> <li>• Low hazard awareness for tasks to be performed</li> </ul>		
		

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ A person is considered to be a Short Service Worker (SSW) if ANY of the following conditions are true:               <ul style="list-style-type: none"> <li>• Less than 6 months relevant experience in tasks hired to perform.</li> <li>• Less than 6 months of experience with PDI.</li> <li>• Have not worked on a PDI worksite within the last 2 years.</li> </ul> </li> <li>✓ A SSWs may be visually identifiable on site with a “SSW” decal on the hard hat (and/or client specific identifier) where required</li> <li>✓ The client must be notified when a SSW will be working at their site, where required.</li> <li>✓ All SSW are to be monitored for compliance with HSE policies and procedures.</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not assume that an older worker is not a SSW.</li> <li>✗ Do not assign another SSW to supervise another SSW</li> <li>✗ Do not permit an SSW to work alone.</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Short Service Worker (SSW)

Safe Work Practice Number

SWP-A29

<ul style="list-style-type: none"> <li>✓ SSW are to be mentored by an experienced / knowledgeable employee.</li> <li>✓ Subcontractors must adhere to the requirements of the PDI SSW program.</li> </ul>	
--	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- O. Reg. 213/91: CONSTRUCTION PROJECTS
- Apply this SWP as per client requirements

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# Torching and Cutting

Potential Hazards Present	Required Personal Protective Equipment * May be required based on risk – see FLHA form	
Slips, trips and falls Inclement weather Fire Explosion Compressed gases Torch flashback Backfire Working at heights New workers Fumes Hot slag Falling steel Ruptures of hoses / gas leak Lack of communication Poor housekeeping Heavy equipment	 <b>Fire Blankets</b>	 <b>First Aid Supplies</b>
	 <b>Safety Glasses with Side Shields</b>	 <b>Fire Extinguisher</b>
	 <b>Leather Gloves</b>	 <b>Fire Resistant Clothing</b>
	 <b>Face Shield</b>	 <b>Respirator*</b>
	 <b>Hard Hat</b>	 <b>Flash Back Arrestors</b>
	 <b>Steel Toe Boots</b>	 <b>Hand Held Radio*</b>

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ Wear approved PPE</li> <li>✓ Obtain hot work permit where required, such as inside or adjacent to an occupied building, before commencing work</li> <li>✓ Perform hot work in a safe location, with any fire hazards in the area removed or covered</li> <li>✓ Assign one dedicated fire watch per torch man to guard against fire, while hot work is being performed and 30 minutes after</li> <li>✓ Fire watch shall carry hand held radio</li> <li>✓ Have one fire extinguisher per torch man</li> <li>✓ Make sure areas are clean and free from debris</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not smoke around gas cylinders (10 meters)</li> <li>✗ Do not tamper with safety features on tools and equipment</li> <li>✗ Do not use equipment unless properly trained on the task</li> <li>✗ Do not perform work unless skin is properly protected</li> <li>✗ Do not allow non-essential employees in the work area</li> <li>✗ Do not allow unprotected workers in the area</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# Torching and Cutting

<ul style="list-style-type: none"> <li>✓ Ensure proper ventilation when cutting indoors, use respirators when required</li> <li>✓ Always make sure face shield is down prior to cutting</li> <li>✓ Keep area free of flammable and combustible materials within 10 meters or additional protection will be needed such as a fire blanket</li> <li>✓ Inspect <b>ALL</b> equipment prior to starting work</li> <li>✓ Periodically check hoses and gauges for leaks and damages (notably during cold weather conditions)</li> <li>✓ Ensure gauges are properly set to the appropriate pressure (PSI)</li> <li>✓ Ensure that all individuals are properly trained and competent for task(s)</li> <li>✓ Ensure new hires have a mentor assigned each day, until individual competency is achieved</li> <li>✓ Watch your footing around the work area</li> <li>✓ Be aware of surroundings</li> <li>✓ Keep hands in sight at all times</li> <li>✓ Stay out of line of fire when cutting</li> <li>✓ Ensure debris and other housekeeping hazards are removed prior to starting work, during work and before leaving the area at the end of the day.</li> <li>✓ Ensure and machines / devices required for proper housekeeping are readily available.</li> <li>✓ Ensure good communication between yourself and other co-workers.</li> <li>✓ Ensure radios are charged and in good operational order and function properly</li> <li>✓ Identify and secure drop zone areas with red tape or other barrier</li> <li>✓ Ensure any personnel coming into the torch area has filled out their daily hazard assessment identifying the hazards/controls in the area</li> <li>✓ Make sure flash back arrestors are installed</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not perform cutting on a closed system such as piping and tanks unless it is de-energized / purged of flammables</li> <li>✗ Do not perform operations without a respirator, when ventilation is not adequate</li> <li>✗ Do not stand in line of fire</li> <li>✗ Do not work in low light conditions</li> <li>✗ Do not lift anything heavier than 50 LBS without help or machinery</li> <li>✗ Do not cross red tape off areas</li> <li>✗ Do not expose skin to extreme cold / compressed gases</li> <li>✗ Do not continue work when fire watch is not available</li> <li>✗ Do not cut in an area with oily rags, or other combustible material nearby.</li> <li>✗ Do not transport bottles with gauges installed.</li> <li>✗ Do not use worn hoses.</li> <li>✗ Do not assist anyone cutting unless you are wearing all required PPE</li> <li>✗ Do not run hoses through doorways.</li> <li>✗ Do not use valve protection caps to lift cylinders.</li> <li>✗ Do not light torch without gloves</li> <li>✗ Do not use lighter to light torch</li> <li>✗ Do not fall steel without an escape route</li> <li>✗ Do not cut with hose in line of fire (eg. sparks, falling steel, etc.)</li> <li>✗ Do not park too close to cutting zone</li> <li>✗ Do not work in a cluttered area.</li> <li>✗ Do not leave gauges on cylinders</li> <li>✗ Do not commence work in an area until the area is clear of housekeeping hazards i.e. trips, slip</li> </ul>
---	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# Torching and Cutting

<ul style="list-style-type: none"> <li>✓ Makes sure to store cylinders in upright position and valve cap installed and secure all cylinders from falling and protect from damage</li> <li>✓ Store all gas cylinders separate from others as required by regulations</li> <li>✓ After use, bleed hoses, remove gauges and replace protective cap on cylinders.</li> </ul>	
--	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

<ul style="list-style-type: none"> <li>• Ensure that manufacturer’s instructions for equipment are present and followed at all times</li> <li>• O. Reg. 213-91 section 343, 122-124</li> <li>• Customer Site Specific Rules and Procedures</li> <li>• Ontario Fire Code – <a href="https://www.ontario.ca/laws/regulation/070213">https://www.ontario.ca/laws/regulation/070213</a></li> <li>• PDI – SWP-A02 Hot Work</li> <li>• PDI – SWP-A19 Fire Protection and Prevention</li> </ul>
--

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



Safe Work Procedure

# Driving

Safe Work Procedure Number

SWP-A31

Potential Hazards Present	Required Safety Devices	
<ul style="list-style-type: none"> <li>• Vehicle breakdown (mechanical, poor tires, overloaded, etc.)</li> <li>• Driver condition (age, attitude, medication, overly emotional, drowsiness, fatigue, physical impairment, intoxication, drugs)</li> <li>• Driver Distractions (Distracting conversations, Retrieving or adjusting cargo, Reading, Texting, Talking on a communication device, Using a laptop, Eating and drinking, Adjusting radio or console settings)</li> <li>• Weather</li> <li>• Road Condition/Road Surface Conditions</li> <li>• Visibility (fog, snow, sleet, light, glare, etc.)</li> <li>• Other road users</li> <li>• Pedestrians</li> <li>• Traffic (amount and vehicle types)</li> <li>• Vehicle not appropriate for task or terrain</li> </ul>		<p><b>Valid Driver's License</b></p>
		<p><b>Seatbelts</b></p>

Required Materials & Equipment
<ul style="list-style-type: none"> <li>• Vehicle in good operating condition</li> <li>• Valid insurance</li> </ul>

Procedure	
<p><b>Before You Start</b></p>	<ul style="list-style-type: none"> <li>• During orientation, all personnel will receive training on the Journey Management Program.</li> <li>• Road travel should be limited/ restricted, when possible, by combining trips or identifying if trips are necessary for a job.</li> <li>• Driving directions should be obtained before travelling to unfamiliar destinations.</li> <li>• Ensure the vehicle is fit for purpose and maintained as per the manufacturer's specifications, in a roadworthy condition by conducting a pre-use inspection.</li> <li>• The number of passengers shall not exceed manufacturer's specification for the vehicle or the number of seatbelts fitted.</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	July 31 <sup>st</sup> 2023	2



# Driving

	<ul style="list-style-type: none"> <li>• Loads shall be secure and shall not exceed manufacturer’s specifications and legal limits for the vehicle.</li> <li>• All loose items within the cabin of the vehicle shall be stowed securely, so as not to contribute to injury in the event of an incident. <ul style="list-style-type: none"> <li>○ Items, which may be considered as loose items, include brief cases, phones, pens &amp; pencils, umbrellas etc.</li> </ul> </li> <li>• Drivers shall be appropriately licensed.</li> <li>• Driver Abstracts are reviewed for all drivers of company owned vehicles.</li> <li>• All drivers shall be medically fit to drive. <ul style="list-style-type: none"> <li>○ If you suffer from any condition that impacts your ability to drive, you are required to notify your Line Manager.</li> </ul> </li> <li>• Rest breaks should be taken to reduce fatigue.</li> <li>• Drivers shall be appropriately rested and alert and shall not drive any vehicle when fatigued.</li> <li>• Drivers shall not be under the influence of alcohol, drugs, or any other substance or medication that could impair their ability to safely operate a vehicle.</li> <li>• The operator should walk around the vehicle’s exterior and look for potential safety hazards such as cracked windshields, missing mirrors, defective tires, and other vehicle body damage or defects. <ul style="list-style-type: none"> <li>○ For Company vehicles and rental vehicles, exterior and/or interior defects should be reported to the responsible Line Manager</li> </ul> </li> <li>• Driving during adverse weather conditions should be avoided.</li> <li>• Check the weather forecast and road conditions. <ul style="list-style-type: none"> <li>○ If required, plan alternate route, or postpone trip until conditions improve</li> </ul> </li> <li>• Satellite navigation devices must be set and re-set only when the vehicle is safely parked.</li> <li>• Where smart phones are used as a GPS device, it shall be secured in an approved cradle attached to either the dashboard or windscreen in a location that will not distract or obscure the drivers view.</li> <li>• Another individual must be aware of the driver’s trip itinerary.</li> <li>• Familiarize yourself with where all controls are and how they operate.</li> <li>• Vehicles should be equipped with roadside emergency kits.</li> </ul>
--	---

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	July 31 <sup>st</sup> 2023	2



# Driving

<p><b>During Operating</b></p>	<ul style="list-style-type: none"> <li>• Drivers must carry a cellphone as a reliable method of communication in case of emergency.</li> <li>• A vehicle is considered to be in operation when it is moving or stationary but not parked (handbrake released).</li> <li>• Seatbelts shall be worn by all occupants at all times whenever a vehicle is in operation</li> <li>• Operators of motor vehicles must follow all traffic laws</li> <li>• Use of cellphone and or electronic devices is prohibited while driving</li> <li>• Smoking is not allowed in company vehicles.</li> <li>• Road travel should be completed during daylight hours when possible.</li> <li>• Adjust driving to suit current road conditions. For example, in adverse light conditions:             <ul style="list-style-type: none"> <li>○ Reduce speed.</li> <li>○ Increase following distance.</li> <li>○ Take extra care to watch for road hazards such as rocks, animals, pedestrians and cyclists.</li> <li>○ Don't overdrive your headlights.</li> <li>○ Keep vehicle lights clean and properly aimed.</li> <li>○ Use sunglasses for bright sunshine or snow glare and use a sun visor.</li> <li>○ Avoid looking directly at oncoming bright headlights</li> </ul> </li> <li>• Slowdown, maintain a safe following distance and be alert for the following:             <ul style="list-style-type: none"> <li>○ Rain can result in slippery conditions and hydroplaning is a concern.</li> <li>○ Bridges and overpasses freeze before roadways.</li> <li>○ High winds affect steering.</li> <li>○ Loose gravel.</li> <li>○ Pay extra attention to oncoming vehicles.</li> <li>○ In snowy or foggy conditions use your low beams to reduce glare.</li> </ul> </li> <li>• Drive defensively and be aware of whom you are sharing the road with:             <ul style="list-style-type: none"> <li>○ Vehicles approaching at intersections.</li> <li>○ Pedestrians have the right of way.</li> <li>○ Treat motorcycles as full size vehicles.</li> <li>○ Maintain pace with traffic, but don't speed.</li> <li>○ Avoid congested routes when possible.</li> </ul> </li> </ul>
--------------------------------	---

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	July 31 <sup>st</sup> 2023	2



Safe Work Procedure

# Driving

Safe Work Procedure Number

SWP-A31

	<ul style="list-style-type: none"> <li>○ If in doubt or to avoid an accident, yield to other vehicles.</li> <li>• When moving in reverse is unavoidable, the driver must ensure the path is clear at the rear of the vehicle <ul style="list-style-type: none"> <li>○ Use a signal person to give directions and honk the vehicle’s horn before proceeding.</li> </ul> </li> </ul>
<b>After You Finish</b>	<ul style="list-style-type: none"> <li>• Where possible, all vehicles should be parked to avoid the need to move in reverse when leaving the parked space.</li> <li>• Clean the vehicle.</li> <li>• Leave the vehicle in good operating condition, <ul style="list-style-type: none"> <li>○ Add fuel / fluids if needed for next drive or driver.</li> </ul> </li> <li>• Report and rectify any problems encountered with the vehicle during the trip</li> <li>• All accidents and citations involving vehicles used for company business must be reported.</li> </ul>
<b>Guidance Documents/ Standards/ Applicable Legislation/ Other:</b>	
<ul style="list-style-type: none"> <li>• Ontario Highway Traffic Act, R.S.O. 1990, c. H.8</li> </ul>	

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	July 31 <sup>st</sup> 2023	2



# Response to Regulatory Inspections & Orders

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk – see FLHA form
<p>Regulatory inspectors, such as ministry of Labour officers, conduct random, unannounced inspections of workplaces, and construction projects, and are authorized to enter any workplace or project, at any time, without prior notice.</p> <p>Inspectors will also attend workplaces to conduct accident, and critical or fatal injury investigations, and to investigate work refusals or safety Disputes.</p> <p>Orders, stop work orders and even prosecutions can result from these inspections.</p>	<p><b>Please review the PPE requirements for the specific site and activity being visited.</b></p> <p><b>Personal Protective equipment requirements are the same for all personnel including all visitors and regulatory personnel.</b></p>

DO	DO NOT
<ul style="list-style-type: none"> <li>• When an inspector announces their presence at a project, site supervision shall be notified immediately of the inspector’s presence and they will notify and arrange for the Health and Safety Representative or selected Joint H&amp;S Committee worker member to attend the inspection, wherever possible.</li> <li>• All personnel will be polite and respectful.</li> <li>• The company will make every effort to accommodate inspector requests, as may be required.</li> <li>• Answer each question honestly and succinctly. Once you have answered a question, stop talking.</li> </ul>	<ul style="list-style-type: none"> <li>✘ Do not obstruct or hinder an officer in the performance of their duties.               <ul style="list-style-type: none"> <li>○ Obstructing an inspector can carry penalties.</li> </ul> </li> <li>✘ Do not wait to inform the site supervision of the presence of an inspector.</li> <li>✘ Do not respond to any orders without consulting with the corporate safety department.</li> <li>✘ Do not fail to respond to the order within the corresponding deadlines indicated in the inspector’s report.</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	July 01 2020	November 15 <sup>th</sup> 2022	1



# Response to Regulatory Inspections & Orders

<ul style="list-style-type: none"> <li>• The inspector will leave a report, indicating the reason for the visit along with recommendations, comments and possible orders.</li> <li>• Where violations have occurred, the inspector may issue written orders to the employer to       <ul style="list-style-type: none"> <li>○ Comply within a certain period of time or, if the hazard is imminent, to comply immediately or even to stop the work.</li> </ul> </li> <li>• Inspector’s orders must be complied with.       <ul style="list-style-type: none"> <li>○ Non-compliance may result in proportionately restrictive action in respect of the contravention, including the assessment of fines, stop-work orders or even prosecution.</li> </ul> </li> <li>• An inspector’s order may require the employer to submit a plan to the Ministry, specifying when it will be complying with the order.</li> <li>• Copies of all inspector reports must be posted in the site trailer “in a conspicuous place where likely to come to the attention of       <ul style="list-style-type: none"> <li>○ The most workers”, and the management member contacted will ensure that copies are           <ul style="list-style-type: none"> <li>○ Issued to the:</li> <li>○ Health and safety representative or joint H&amp;S committee, as appropriate,</li> <li>○ Project manager</li> <li>○ Corporate H&amp;S department</li> </ul> </li> </ul> </li> </ul>	
--	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	July 01 2020	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Response to Regulatory Inspections & Orders

Safe Work Practice Number

SWP-A32

<ul style="list-style-type: none"> <li>• An inspector’s order, or decision not to issue an order, can be appealed by a worker, union,             <ul style="list-style-type: none"> <li>○ employer, constructor, licensee or owner aggrieved by the order.</li> </ul> </li> <li>• If you disagree with an order please contact the Corporate safety manager immediately for assistance with the next steps.</li> <li>• In some circumstances, the MOL may also initiate a prosecution, charging the employer and/or supervisor and/or any other party with a violation of the legislation.             <ul style="list-style-type: none"> <li>○ If a prosecution is initiated, the corporate legal and safety departments will be contacted and lead the response.</li> </ul> </li> </ul>	
--	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- [Ontario Occupational Health and Safety Act](#)
- O. Reg. 213/91: CONSTRUCTION PROJECTS

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	July 01 2020	November 15 <sup>th</sup> 2022	1



# Interior Demolition with Mechanical Equipment

Safe Work Practice Number

SWP-A33

Potential Hazards Present	Required Personal Protective Equipment * May be required based on risk – See FLHA form			
Struck by Machine Falling material Fall from open edge Fall through holes in slab Diesel Exhaust (Carbon Monoxide) Noise Dust		<b>Safety Glasses with Side Shields</b>		<b>Hard Hats</b>
		<b>Steel Toed Boots</b>		<b>Reflective vest</b>
		<b>Respiratory Protection</b>		<b>Fall Arrest Harness*</b>
		<b>Hearing Protection</b>		

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ Complete a daily equipment inspection form</li> <li>✓ Participate in the daily tool box meeting / review FLHA form</li> <li>✓ Review engineered plan(s) for floor loading and equipment spacing</li> <li>✓ Ensure utilities to be removed have been disconnected and made safe.</li> <li>✓ Ensure any utilities that are to remain are identified and protected as required.</li> <li>✓ Isolate work area to exclude unauthorized persons</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not operate defective equipment</li> <li>✗ Do not operate without an engineered evaluation of the floor (slab), if working on a suspended slab</li> <li>✗ Do not operate equipment you unfamiliar with or not trained / competent to operate</li> <li>✗ Do not reverse equipment if your visibility is restricted</li> <li>✗ Do not disregard alarms from Gas Monitoring devices</li> <li>✗ Do not remove walls if you are unsure of what is on the other side</li> <li>✗ Do not overload floors with demolition waste</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# Interior Demolition with Mechanical Equipment

<ul style="list-style-type: none"> <li>✓ Maintain a restricted zone of 2 times the actual swing radius of the equipment (see pictures)</li> <li>✓ Obtain permission prior to entering a restricted work zone.</li> <li>✓ Ensure removals do not affect areas outside the work area (i.e. – backside of a wall)</li> <li>✓ Post spotters as required</li> <li>✓ Ensure gas monitors are used to evaluate Carbon Monoxide levels in the work place</li> <li>✓ Use vent fans, if required, to dilute exhaust gases</li> <li>✓ Use water to suppress dust</li> <li>✓ Use respiratory protection in dusty environments</li> <li>✓ Use hearing protection when around operating machinery</li> <li>✓ Wear retroreflective vests</li> <li>✓ Use fall arrest devices when working at leading edge or open hole hazards</li> </ul>	<ul style="list-style-type: none"> <li>* Do not work near unprotected open edges</li> </ul>
---	---

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# Interior Demolition with Mechanical Equipment

Safe Work Practice Number




SWP-A33

--	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Ensure that manufacturer’s instructions are present and followed at all times
- Ontario Regulations for Construction Projects
- Utility disconnect Safe Work Practice

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

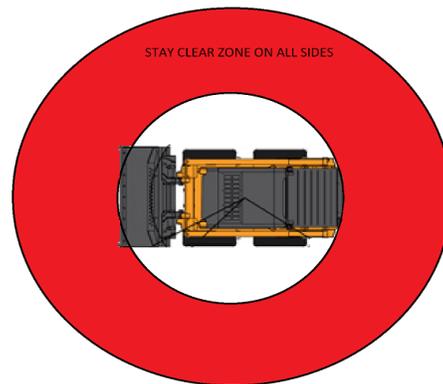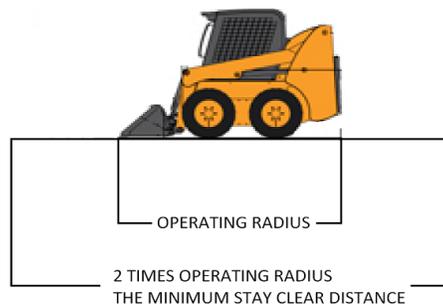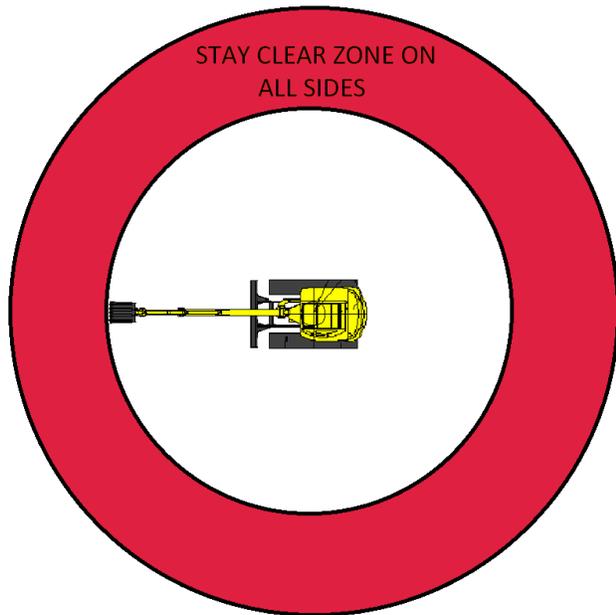

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# Dropped Objects

Potential Hazards Present	Required Personal Protective Equipment * May be required based on risk – See FLHA form	
<ul style="list-style-type: none"> <li>• Environmental factors/ Severe weather</li> <li>• Falling trees/ branches</li> <li>• Loose materials on elevated surfaces</li> <li>• Collapse of structures</li> <li>• Unsecured objects during lifting operations</li> <li>• Lifting equipment failure</li> </ul>	 <b>Hard Hats</b>	 <b>Steel Toed Boots</b>
	 <b>Safety Glasses*</b>	 <b>Hand protection*</b>
	 <b>Hi visibility Clothing*</b>	

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ Wear approved PPE as noted.</li> <li>✓ Perform hazard assessment prior to commencing work to assess the risk of dropped objects.</li> <li>✓ Inspect tools prior to use and be sure all guards are in place and in good working condition.</li> <li>✓ Inspect cranes and hoists prior to use to ensure all components are in good working order, including wire rope, lifting hooks and chains.</li> <li>✓ Implement good housekeeping and be aware of your surroundings.</li> <li>✓ Ensure all affected personnel are trained on dropped object risk-mitigation.</li> <li>✓ Ensure only properly trained workers to use power-actuated tools.</li> <li>✓ When working with machines or power tools that can produce flying particles, wear safety glasses, goggles, or face shields.</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not work under moving or suspended loads.</li> <li>✗ Do not exceed the lifting capacity of cranes and hoists.</li> <li>✗ Do not lift, lower or swing load over someone’s head.</li> <li>✗ Do not enter any damaged structure unless it has been assessed by a professional engineer and deemed safe.</li> <li>✗ Do not use uninspected equipment or tools.</li> <li>✗ Do not obstruct vision by overloading moving equipment.</li> <li>✗ Do not ignore warning signs or barricades.</li> <li>✗ Do not remove toe boards, guardrails or barricades until the hazard is eliminated.</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	August 25, 2023	August 25 <sup>th</sup> 2023	1

- ✓ Establish Restricted Access Zones and/or No-Entry Zones below overhead work areas.
- ✓ Implement control measures to prevent dropped objects hazards.
- ✓ Stack materials securely to prevent them from sliding, falling, or collapsing.
- ✓ Secure all tools and materials using tethers, tool belts, and containment sheeting to prevent them from falling on people below.
- ✓ Use toe boards, restraining bars, or guardrails on scaffolds to prevent objects from falling.
- ✓ Use debris nets or catch platforms to grab falling objects.
- ✓ Post warning signs at hazardous work zones.



- ✓ Report to the supervisor when any changes occur to equipment or processes to follow Management of Change (MOC) procedures.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	August 25, 2023	August 25 <sup>th</sup> 2023	1



- 1 C.R.A.  
Continuous Risk Assessment
- 2 KICK / TOE-BOARDS & NETTING  
Prevent falling objects
- 3 STORAGE FOR TOOLS  
Keep in containers
- 4 HARD HAT  
Chinstraps in adverse weather  
or as directed
- 5 TOOLS ON LANYARDS
- 6 GOOD HOUSEKEEPING  
Clear floors
- 7 EXCLUSION ZONE  
around scaffold where  
risk assessed

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	August 25, 2023	August 25 <sup>th</sup> 2023	1

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- O. Reg. 213/91: Construction Projects
- Infrastructure Health and Safety Association- Safety Talks - Falling Objects Hazards
- PDI Safe Work Practice A15 - Working at Heights
- PDI Safe Work Practice A13 - Barricades and Guardrails

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

<b>JH&amp;SC Review:</b>	<b>Approved By:</b>	<b>Date Created:</b>	<b>Date of Last Review:</b>	<b>Rev. No.</b>
Original Signed	Chris Letkeman	August 25, 2023	August 25 <sup>th</sup> 2023	1



# Tarping Bins

Potential Hazards Present	Required Personal Protective Equipment * May be required based on risk – See FLHA form	
<ul style="list-style-type: none"> <li>Falling from heights while climbing on top of the load</li> <li>Slipping or tripping on the tarp or straps</li> <li>Developing musculoskeletal disorder (MSD) in the back, neck, shoulders, muscles, or joints from lifting and pulling, bending, and reaching.</li> <li>Overexertion and strain/sprain injuries due to working in awkward positions.</li> <li>Uneven surfaces</li> </ul>	 <b>Hard Hats</b>	 <b>Steel Toed Boots</b>
	 <b>Safety Glasses</b>	 <b>Hand protection</b>
	 <b>Hi visibility Clothing</b>	 <b>Fall Protection*</b>

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ Wear approved PPE as noted.</li> <li>✓ Do not lift with your back.</li> <li>✓ Watch out for gaps and cracks on the top of the load to prevent tripping.</li> <li>✓ Remain close to the load’s centerline while unrolling the tarp.</li> <li>✓ Be sure that the tarp meets the deck if tie-downs are worn or damaged.</li> <li>✓ Properly roll tarps to make them easier to handle.</li> <li>✓ Unroll the tarp from the end of the load, so that you can push the tarp forward.</li> <li>✓ Use small, light tarps instead of large, heavy ones when possible.</li> </ul>	<ul style="list-style-type: none"> <li>✗ If possible, do not climb on top of the load to spread the tarp manually.</li> <li>✗ If you must climb on top of the load to spread the tarp manually do not walk around unnecessarily.</li> <li>✗ Don’t work in situations where you are exposed to heights greater than 10ft (or client requirements) without fall protection.</li> <li>✗ Don’t lift with your back.</li> <li>✗ Do not hold the ropes loosely—they can slip or break.</li> <li>✗ Do not make sudden or ‘jerking’ movements when lifting or pulling the tarp as it can overload your muscles/joints.</li> </ul>


JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	March 25, 2024	March 25 <sup>th</sup> , 2024	1

<ul style="list-style-type: none"> <li>✓ Plan where to place and unfold the tarp, how to tuck in the folds and where to connect the bungee cords, etc.</li> <li>✓ Maintain 3-point contact when getting on and off trailers.</li> <li>✓ Park the trailer on level ground.</li> <li>✓ If windy, park the truck close to a building to block the wind and prevent the tarps from blowing around.</li> <li>✓ Stand with your legs spread apart for balance before pulling the tarp.</li> <li>✓ Get a firm grip on the tarp and use both hands to pull the tarp to prevent overexertion.</li> <li>✓ Keep your hands close to your body at about waist height to prevent overreaching.</li> <li>✓ Wear non-slip gloves to maintain your grip (where required)</li> <li>✓ Place lighter items underneath heavier items to help keep them in place.</li> <li>✓ Inspect the bin to ensure it does not have a hole or tear where debris can escape.</li> <li>✓ Follow all client/site requirements which can vary.</li> <li>✓ Fall protection requirements vary by jurisdiction, ensure that you maintain compliance in your area. See appendix A for options.</li> </ul>	
--	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	March 25, 2024	March 25 <sup>th</sup> , 2024	1

## Appendix 1

- ✓ Engineered overhead anchor points for fall protection system such as overhead rail system or horizontal lifelines.

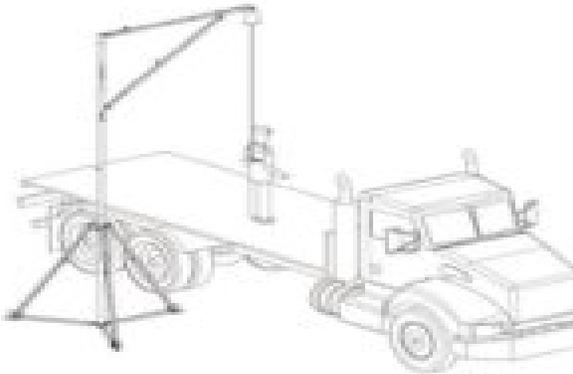

- ✓ EWP or genie lift with approved external anchor points.

Note: At least 3 employees required when using EWP for this purpose (one worker tied off to boom while working inside trailer with a double land yard, one worker in the man basket and one on the ground)



JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	March 25, 2024	March 25 <sup>th</sup> , 2024	1

- ✓ Suitable temporary access platforms with appropriate guardrails.



**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- O. Reg. 213/91: Construction Projects
- Infrastructure Health and Safety Association - Tarping loads
- PDI Safe Work Practice A15 - Working at Heights
- OSHA 1926

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	March 25, 2024	March 25 <sup>th</sup> , 2024	1



# Manual Hand Tools

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk – see FLHA form	
Repetitive strain Pinch points Dropped objects Flying debris Sharp edges Muscle strain	 <b>Safety Glasses with Side Shields</b>	 <b>Hard Hat</b>
	 <b>Steel Toed Boots</b>	 <b>Hand Protection</b>

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ Wear approved PPE as noted</li> <li>✓ Select and use the proper tool for the job</li> <li>✓ Hold tools as designed, to ensure ergonomics</li> <li>✓ Carry all sharp tools in sheaths or holsters and ensure blades are retracted</li> <li>✓ Inspect all parts of a tool before every use</li> <li>✓ Maintain a sufficient distance from other workers</li> <li>✓ Remove, retract or sheath blades after tool use</li> <li>✓ Ensure proper storage of tools after use</li> <li>✓ Ensure tools are cleaned/decontaminated prior to storage</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not use damaged tools</li> <li>✗ Do not tamper with safety features</li> <li>✗ Do not modify or repair tools unless qualified to do so.</li> <li>✗ Do not subject a hand tool to conditions beyond its designed capacity or use</li> <li>✗ Do not carry tools by hand up a ladder</li> <li>✗ Do not use unsecured hand tools when working at heights.</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Manual Hand Tools

Safe Work Practice Number

SWP-E01

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Ensure that manufacturer’s instructions are present and followed at all times
- O. Reg. 213-91, Section 93 & 195
- Customer Site Specific Rules and Procedures.

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Powered Hand Tools

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk – see FLHA form			
Repetitive strain Dropped objects Muscle strain Vibration Sharp edges Airborne contaminants Noise Vibration		<b>Safety Glasses with Side Shields</b>		<b>Hard Hats*</b>
		<b>Hand Protection</b>		<b>Hearing Protection*</b>
		<b>Steel Toed Boots</b>		<b>Respiratory Protection*</b>

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ Wear approved PPE as noted</li> <li>✓ Power Tools may only be operated by a competent person.</li> <li>✓ Select the right tool for the job</li> <li>✓ Inspect all tools before use</li> <li>✓ Unplug tools when servicing</li> <li>✓ Hold tools as designed to ensure proper ergonomics</li> <li>✓ Use gloves and alternate activities to reduce exposure to repetitive strains</li> <li>✓ Ensure that all maintenance records are maintained and updated as required.</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not use damaged tools</li> <li>✗ Do not tamper with safety features</li> <li>✗ Do not carry or disconnect tools by the cord</li> <li>✗ Do not leave tools plugged in when not in use</li> <li>✗ Do not modify or repair tool unless qualified to do so</li> <li>✗ Do not carry tools by hand up a ladder</li> <li>✗ Do not subject power tools to conditions beyond their designed capacity</li> <li>✗ Do not wear loose fitting clothing</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	August 15 <sup>th</sup> 2023	2



# Powered Hand Tools

<ul style="list-style-type: none"> <li>✓ Maintain a safe distance from other workers</li> <li>✓ Use the right length and gage of cord and avoid trip hazards</li> <li>✓ Use GFI's in wet conditions or outdoors</li> <li>✓ Always tag out damaged equipment</li> </ul> <div style="display: flex; justify-content: space-around; margin-top: 20px;">   </div>	<ul style="list-style-type: none"> <li>✗ Do not modify triggers in order to lock them in place.</li> </ul>
---	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Ensure that manufacturer's instructions are present and followed at all times
- O. Reg. 213-91, Section 93 & 195
- Customer Site Specific Rules and Procedures
- PDI Safe Work Practice: Vibration, Damaged equipment

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	August 15th 2023	2



# Defective Equipment

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk – see FLHA form
Electrical shock Struck by / crush by objects Mechanical failure	<ul style="list-style-type: none"> <li>• <b>The use of Personal Protective Equipment does not permit the use of damaged or defective tools.</b></li> </ul>


DO	DO NOT
<ul style="list-style-type: none"> <li>✓ An equipment inventory has been established and shall be maintained</li> <li>✓ Preventive maintenance schedules must meet manufacturer and all legislated requirements for the tool or equipment being used.</li> <li>✓ Records of maintenance activities must be kept.</li> <li>✓ Watch for potential damage to your equipment such as:                             <ul style="list-style-type: none"> <li>• broken or inoperative guards</li> <li>• insufficient or improper grounding due to damage on double insulated tools</li> <li>• no ground wire (on plug) or cords of standard tools</li> <li>• abnormal operation or noise during operation</li> <li>• the on/off switch not in good working order</li> <li>• Cracked or damaged welds</li> <li>• chisels and wedges with mushroomed heads;</li> <li>• split or cracked handles</li> <li>• chipped or broken drill bits</li> <li>• wrenches with worn out jaws</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not use equipment that is deemed unsafe until repaired or replaced by a qualified person.</li> <li>✗ Do not attempt field repairs unless you are specifically trained and authorised to do so.</li> <li>✗ Do not use tagged out or potentially defective items under any circumstances.</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Defective Equipment

- tools which are not complete, such as files without handles
  - Bent / cracked rungs or supports on ladders
- ✓ If a tool or piece of equipment is found to be defective or has sustained damage, immediately stop use and report to your supervisor.
  - ✓ Worker and supervisory personnel shall inspect the broken tool/piece of equipment to decide what type of action is required. (e.g. Repair on site, remove from use, etc.)
  - ✓ Attach a DANGER DO NOT USE tag to the equipment, to ensure it does not get used again.

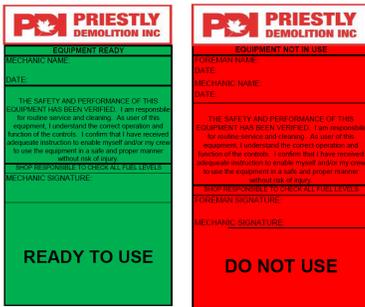

- ✓ Indicate what is wrong with the equipment or tool
- ✓ Ensure the defective or damaged tool / equipment is placed in a safe, secure location and is unavailable to other workers / operators.
- ✓ Supervision will make arrangements to get the tool/equipment in good working order (i.e. repairs, arranging for replacement).

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Defective Equipment

<p>✓ Only authorized workers will be permitted to carry out repairs.</p>	
--	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Ontario Reg. 213/91: Construction Projects

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Crushing and Screening

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk – see FLHA form	
Contact with energy sources Rotating equipment Dust Noise Vibration	 <b>Safety Glasses with Side Shields</b>	 <b>Hard Hat</b>
	 <b>Hearing Protection</b>	 <b>Respirator*</b>
	 <b>Steel Toed Boots</b>	 <b>Hi Visibility Vest</b>

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ Wear approved PPE as noted</li> <li>✓ Determine the type of operation to be conducted – i.e. industrial, mining or construction</li> <li>✓ Ensure ground is level when setting up and blocking crushing and screening plants</li> <li>✓ Ensure all guards are in place prior to starting equipment</li> <li>✓ Ensure alarms and emergency stopping devices function correctly</li> <li>✓ Ensure all persons are in a safe location prior to starting equipment</li> <li>✓ Lock and tag all equipment prior to working on it.</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not use equipment that is unguarded</li> <li>✗ Do not use hand tools around unguarded/rotating equipment</li> <li>✗ Do not climb/walk on conveyors</li> <li>✗ Do not stand or work under moving conveyors.</li> <li>✗ Do not use pull cords to stop equipment under normal conditions. Use the start stop switches.</li> <li>✗ Do not enter bins/Hoppers unless equipment is locked out and all production work is stopped in order to prevent material from being dumped onto the worker. Use a spotter if necessary.</li> <li>✗ Do not use equipment that you are not authorized or trained to operate.</li> </ul>

<ul style="list-style-type: none"> <li>✓ Ensure equipment is blocked to prevent it from falling or moving when performing maintenance on it.</li> <li>✓ Limit the amount of time you are standing on a crusher in order to reduce vibration hazards</li> <li>✓ Shut down equipment to manually clear blockages of the crusher</li> <li>✓ Empty the crusher, screens and conveyors of material prior to shutting them down</li> <li>✓ Use water to control dust emissions</li> <li>✓ Keep walkways clear of material</li> <li>✓ Ensure lubrication lines are extended outside the guard</li> <li>✓ Be aware of the possibility of falling material from elevated equipment</li> </ul>	
--	--

<b>Guidance Documents/ Standards/ Applicable Legislation/ Other:</b>
<ul style="list-style-type: none"> <li>• Ontario Regulation for Mines and Mining Plants</li> <li>• Ontario Construction Safety Regulation</li> <li>• Ontario Industrial Establishments</li> <li>• IHSA - Safe Work Practices for the Aggregate Industry</li> <li>• PDI Safe Work Practices: Noise, Dust, Vibration</li> </ul>

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Forklift Operation

Safe Work Practice Number

SWP-E05

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk – see FLHA form			
Contact with electrical supply Struck by falling materials Contact with racking components Pedestrians / personnel Other vehicles / forklifts Failure / collapse Uneven surfaces Ventilation Tip over Temperature extreme		<b>Seatbelt</b>		<b>High visibility vest*</b>
		<b>Safety Footwear</b>		<b>Hearing Protection*</b>
		<b>Gloves*</b>		<b>Safety glasses*</b>

DO	DO NOT
<p>✓ A lifting device is only to be operated by a competent person. "Competent person" is defined by the OSHA as someone who:</p> <ul style="list-style-type: none"> <li>• Is qualified because of his knowledge, training, and experience to organize the work and its performance</li> <li>• Is familiar with the provisions of this act and the regulations that apply to the work</li> <li>• Has knowledge of any potential or actual danger to health or safety in the workplace.</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not allow any part of a load to pass over any worker</li> <li>✗ Do not exceed the maximum rated load</li> <li>✗ Do not allow a lift truck to be used to support, raise or lower a worker on a construction site and must only be so used in an industrial establishment if the work is carried out in accordance with Regulation 851 (Section 52)</li> <li>✗ Do not operate at excessive speeds</li> <li>✗ Do not operating a fork truck that is need of repair or maintenance</li> <li>✗ Do not leave the truck unattended while its engine is still running</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Forklift Operation

- ✓ A competent person shall be designated as a supervisor. this means someone who, through training and experience knows:
  - ✓
    - The hazards associated with: the type of lift truck being used
    - The loads being handled and the environment in which the truck will be operated
    - How identify unsafe acts and conditions and implement corrective measures.
- ✓ Floors, aisles and passageways are to be kept clear and free of hazards.
- ✓ A lift truck left unattended must be immobilized and secured against accidental movement and the forks, buckets or other attachments must be in the lowered position or firmly supported
- ✓ When a load is in the raised position, the controls must be attended by an operator
- ✓ If an operator does not have a clear view, a signaller, who has been instructed in a code of signals for managing traffic in the workplace, must be used
- ✓ Loads must be carried as close to the ground or floor as the situation permits
- ✓ Loads that may tip or fall and endanger a worker must be secured

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Forklift Operation

<ul style="list-style-type: none"> <li>✓ Loads must be handled in accordance with the height and weight restrictions on the vehicle's load chart</li> <li>✓ Where a lift truck is required to enter or exit a vehicle to load or unload, that vehicle must be immobilized and secured against accidental movement.</li> <li>✓ Barriers, warning signs, designated walkways or other safeguards must be provided where pedestrians are exposed to the risk of collision.</li> <li>✓ An inspection is to be carried out at the beginning of the truck operator's shift.</li> <li>✓ Every lift truck should have clearly displayed information showing the maximum rated load and the variation of the rated safe load capacity with the reach of the equipment.</li> <li>✓ Every truck should be equipped with the following: <ul style="list-style-type: none"> <li>• A suitable screen, guard, grill or other structure to protect the operator from falling or intruding materials (which may be mandatory under clause 54(1)(b) of Regulation 851)</li> <li>• Warning devices and lights that are appropriate for the work environment</li> <li>• A seat belt or other restraining device that is likely to contribute to the safety of the operator, if it is feasible.</li> </ul> </li> </ul>	
---	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Forklift Operation

Safe Work Practice Number

SWP-E05

--	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Ontario Regulation 1990, Reg. 851: Industrial Establishments
- Priestly Operator Daily Truck Inspection and log

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Forklift Operation

Safe Work Practice Number

SWP-E05

## PRIESTLY

### Operator's Daily Lift Truck Inspection and Log

Equipment # \_\_\_\_\_ Operator Name \_\_\_\_\_

Start Date & Hour Reading: \_\_\_\_\_ End Date & Hour Meter Reading: \_\_\_\_\_

General	Mon	Tues	Wed	Thurs	Fri	Sat.	Sun.
Cab/doors/windows							
Annual certification							
Daily Greasing Done							
<b>In-Cab</b>							
Gauges/Indicators							
Horn							
Extinguisher							
Load Chart/name plate							
Cab heater							
Operator's Manual							
<b>Exterior</b>							
Lights							
Exhaust system							
Windshield wipers							
<b>Engine Compartment</b>							
Battery							
Engine Oil							
Coolant Level							
Belts							
Transmission Fluid							
Radiator							
Hydraulic fluid							
Hoses							
<b>Undercarriage</b>							
Tires							
Wheels							
<b>Mast/Boom Assembly</b>							
Chains							
Forks							
Welds/Connections							
<b>Hydraulics</b>							
Cylinders							
Seals							
Attachment							
<b>Job number</b>							
<b>Operator Initials</b>							
<b>Supervisor Initials</b>							
<b>Work Order Number</b>							

**Instructions for Checklist:**  
 Operator must complete this inspection before each shift or prior to use when the machine arrives at a new job  
 ✓- acceptable condition  
 X- condition not acceptable, give details below under comments  
 O- problem corrected, note the work order number on the checklist if applicable.  
 N/A- not applicable on this machine

**Comments:** \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_



White copy- office      Yellow copy-machine log  
 2018 edition checklist

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Warehouse Activities

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk			
<ul style="list-style-type: none"> <li>• Low back injury</li> <li>• Muscle strain</li> <li>• Crush injury</li> <li>• Potential eye injury from broken strapping</li> <li>• Partial or total failure/collapse of racking systems</li> <li>• Lift trucks colliding with racks, causing material to be displaced or causing potential damage to the racking itself</li> <li>• Material falling through the back of racks</li> </ul>		<b>Seatbelt</b>		<b>High visibility vest</b>
		<b>Safety Footwear</b>		<b>Hearing Protection*</b>
		<b>Gloves*</b>		<b>Safety glasses*</b>

DO	DO NOT
<p><b>General</b></p> <ul style="list-style-type: none"> <li>✓ Keep aisles and passageways clear and in good condition, this prevents workers from slipping, tripping, or falling.</li> <li>✓ Loads should be placed evenly and properly positioned, heavier loads must be stacked on lower or middle shelves</li> <li>✓ Always remember to remove one load at a time</li> <li>✓ Pay attention to pedestrian safety rules and safety boot policy</li> <li>✓ Encourage truck drivers to stay in safe waiting areas</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not remove strapping by breaking it with a hammer, bar, chisel, or other tool</li> <li>✗ Do not use more force to tighten straps than the machine is designed for</li> <li>✗ Do not allow anyone in the truck when a forklift is working in it</li> <li>✗ Do not allow anyone to drive over a collapsed dock leveler</li> <li>✗ Do not use empty pallets as walkways.</li> <li>✗ Do not block exits. They must be kept clear at all times.</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Warehouse Activities

<ul style="list-style-type: none"> <li>✓ Talk to your clients and get as much information about delivery conditions as you can</li> <li>✓ Wear non-slip footwear that has adequate tread</li> </ul> <p><b>Shrink wrapping and assembly of loads</b></p> <ul style="list-style-type: none"> <li>✓ Whenever possible, use automated wrapping equipment. If you must wrap by hand:             <ul style="list-style-type: none"> <li>○ Use ergonomically correct tools</li> <li>○ Rotate to other jobs so that you do not have to wrap too many loads on a shift</li> </ul> </li> <li>✓ Order shrink-wrap on spools that have a wide diameter and are light</li> <li>✓ Wrap skids in one specific area and make sure that all equipment operators are aware of this area</li> <li>✓ To reduce shoulder and upper back injury when you are wrapping make sure that skids are not built above shoulder height</li> <li>✓ Alternate your wrapping direction and techniques</li> <li>✓ Fill the hollow inside of loads with air pillows or used shrink-wrap</li> <li>✓ If you are a driver, use ergonomic lifting, pulling and reaching devices such as “lambs’ hooks”</li> </ul>	
---	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Warehouse Activities

<ul style="list-style-type: none"> <li>✓ Make sure that you are trained in product integrity and how to build stable loads</li> <li>✓ If possible, go out with the driver on a regular delivery, so that you will understand how the way you assemble orders can affect the drivers job</li> </ul> <p><b>Lifting below the knees and above the shoulders</b></p> <ul style="list-style-type: none"> <li>✓ Make sure that you are aware of lifting hazards and proper lifting techniques</li> <li>✓ Pay attention to the postures you use when working</li> <li>✓ Whenever possible, rotate duties so that you can vary your postures</li> <li>✓ Adjust the height of the forks to get your load to an ideal height</li> <li>✓ Use a stable step stool or platform to reach high items and place extra product on raised skids</li> <li>✓ Allow time to warm up your back muscles after sitting on the forklift and before hand-bombing</li> </ul> <p><b>Dock levelers and portable dock plates</b></p> <ul style="list-style-type: none"> <li>✓ Make sure that the forks on your lift truck are always pointing up and that they are high enough to clear the dock plate or leveler</li> <li>✓ Make sure that your lift truck is checked for hydraulic drift, which can cause forks to point down unexpectedly</li> </ul>	
---	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Warehouse Activities

<ul style="list-style-type: none"> <li>✓ Make sure that air ride trailers are lowered to reduce the angle of the dock leveler</li> <li>✓ Drive slowly over a dock plate or leveler</li> <li>✓ Whenever possible, use a forklift to position portable dock plates</li> <li>✓ Ensure that the dock plate is equipped with anchor stops and signs that indicate the size of load they can handle</li> <li>✓ Make sure that dock levelers are fitted with skirt plates and toe guards so that your feet cannot be trapped</li> <li>✓ Always look behind you that the path is clear</li> <li>✓ Make sure that you report problems with levelers and ask for prompt servicing</li> </ul> <p><b>Adding or removing strapping</b></p> <ul style="list-style-type: none"> <li>✓ Use safety goggles and leather gloves</li> <li>✓ With heavy strapping, use steel-reinforced glove</li> <li>✓ Do not use more force to tighten straps than the machine is designed for</li> <li>✓ To cut off excess strapping and sharp or pointed ends and remove any broken or damaged bands, use metal snips (cutters) when You Are Working with Strapped Items</li> <li>✓ Face in the direction of the pull</li> </ul>	
--	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Warehouse Activities

<ul style="list-style-type: none"> <li>✓ Stay out of the direct line when the strap is under tension</li> <li>✓ Do not lift a package by the strapping</li> <li>✓ Anchor the closest end with a holding device</li> <li>✓ Warn other workers, pick up your snips, turn your back to the strapping and stand out of the line of recoil</li> <li>✓ If the strapping is not made of metal, tie a knot in it</li> <li>✓ If the strapping is metal, fold and flatten it</li> <li>✓ Throw out waste strapping immediately so it does create a tripping hazard</li> </ul>	
--	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Ontario Reg. 213/91: Construction Projects
- Ontario Regulation 1990, Reg. 851: Industrial Establishments
- Workplace Safety & Prevention Services - Warehouse Safety
- PDI Safe work Practices: Forklifts, Manual lifting, Noise, WHMIS, Lock out/Tag out

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Processing and Sorting Demolition Materials

Safe Work Practice Number

SWP-E07

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk – see FLHA form	
Contact with energy sources Designated substances Contact with unknown hazardous substances Contact with other equipment working along side Ground personnel Noise Dust Vibration Shrapnel or flying debris Stored energy in bent timber or steel		<b>Safety Glasses with Side Shields</b>
		<b>Hard Hat</b>
		<b>Hearing Protection</b>
		<b>Respirator*</b>
		<b>Steel Toed Boots</b>
		<b>Hi Visibility Vest</b>

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ Conduct a formal daily pre-use inspection prior to starting the equipment</li> <li>✓ Conduct informal monitoring of equipment condition throughout the day</li> <li>✓ Wear appropriate PPE as noted</li> <li>✓ Maintain clear transport corridors</li> <li>✓ Sort and recycle according to type</li> <li>✓ Reduce material size suitable for transporting</li> <li>✓ Use water to control dust emissions when appropriate.</li> <li>✓ Be cautious of possibility of falling material from material handling equipment attachments or from sorted pilings</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not operate while other workers are in close proximity</li> <li>✗ Do not enter processing/sorting areas without prior approval from operator</li> <li>✗ Do not approach freshly demolished debris without first checking for spring loaded energy</li> <li>✗ Do not mobilize equipment without first reviewing SWP's or Job Hazard Analyses documents</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Practice

Processing and Sorting Demolition Materials

Safe Work Practice Number

SWP-E07

<ul style="list-style-type: none"> <li>✓ Confirm that manufacturer’s equipment instructions are present and followed at all times</li> <li>✓ Ensure all workers maintain a safe distance <ul style="list-style-type: none"> <li>○ 1.5 times the operating radius for large equipment,</li> <li>○ 2 times the operating radius for small equipment</li> </ul> </li> </ul>	
--	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Occupational Health and Safety Act
- O. Reg. 213/91: CONSTRUCTION PROJECTS
- IHSA Safe work Practices for Construction Projects
- PDI Safe Work Practice: Dust, Noise, Vibration

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1




Safe Work Practice

# Processing and Sorting Demolition Materials

Safe Work Practice Number

SWP-E07

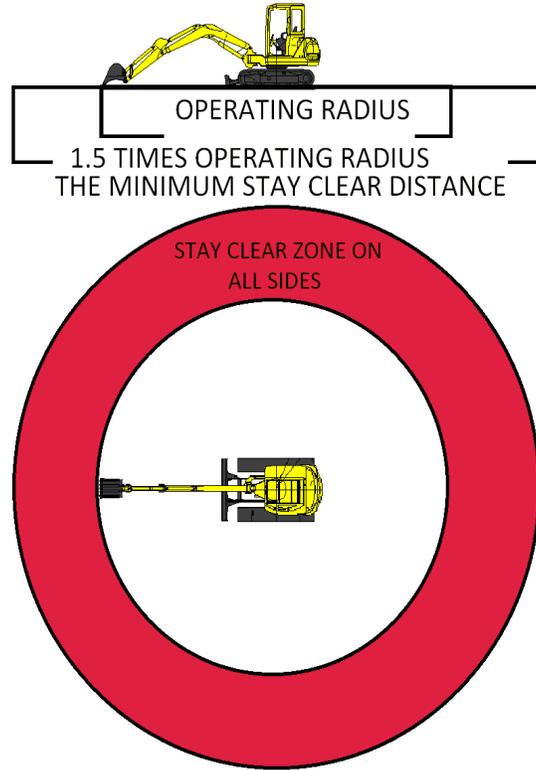

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1





Safe Work Practice

# Processing and Sorting Demolition Materials

Safe Work Practice Number

SWP-E07

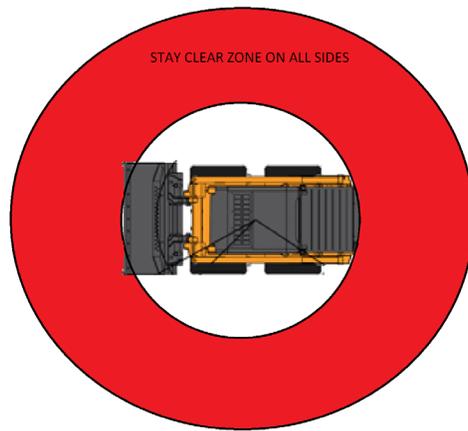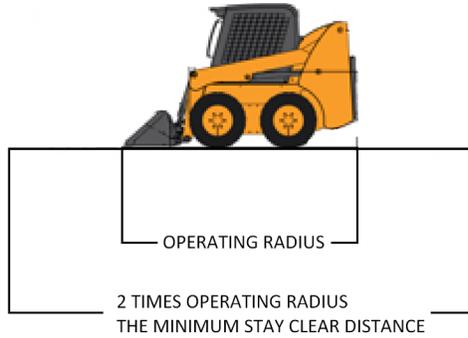

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Vehicle Use

Safe Work Practice Number

SWP-E08

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk – see FLHA form	
Other drivers Pedestrians Weather Poor road conditions Poor visibility Animals / Wildlife Mechanical Fatigue	 <b>Emergency kit</b>	 <b>Back up alarms*</b>
		 <b>Seatbelts</b>

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ Check your tires, brake pads, oil level and lights regularly.</li> <li>✓ Ensure that your spare tire is in good condition and that your jack is working.</li> <li>✓ If there are any strange noises when you drive, or if there are changes in the feel of your vehicle, don't ignore them. Investigate the causes and have them repaired if needed.</li> <li>✓ Pay close attention to the situation on the road; check your blind spots and mirrors – do these all the time.</li> <li>✓ Always wear your seatbelt</li> <li>✓ Stick to the allowed speed limit.</li> <li>✓ Be courteous to other drivers and avoid upsetting other road users.</li> </ul>	<ul style="list-style-type: none"> <li>✗ No driver shall exceed 13 hours of driving time and/or 14 hours of on-duty time in a day.</li> <li>✗ Drivers may not operate commercial vehicles while their ability or alertness is impaired.</li> <li>✗ Do not hold-off on performing regular maintenance as this helps keep your vehicle safe. When making modifications, consult an expert first – avoid performing modifications on your own if you're not an expert on these things.</li> <li>✗ Do not use a vehicle that you find difficult to drive.</li> <li>✗ Do not drive when you know you can't focus 100% on the road.</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Vehicle Use

<ul style="list-style-type: none"> <li>✓ Make sure to use your indicators even if there's no one else around.</li> <li>✓ Make room for bicyclists and make sure to give pedestrians the right-of-way especially in crosswalks.</li> <li>✓ When driving under bad weather conditions, keep a winter survival kit in your car.</li> <li>✓ Plan your route out in advance for long car trips and keep a map or atlas in the car in case you get lost</li> <li>✓ Give pedestrians the right-of-way in crosswalks.</li> <li>✓ Keep your eyes constantly moving, scanning the road ahead and to the side and checking your mirrors every five seconds or so</li> <li>✓ All loads are to be adequately secured for transport</li> <li>✓ Commercial vehicles, when operated, must be inspected every 24 hours</li> <li>✓ Document any defects observed during daily inspections.</li> <li>✓ Defects that might affect the safe operation of a vehicle are to be repaired before the vehicle is operated on a public road.</li> </ul>	<ul style="list-style-type: none"> <li>✗ When driving in poor conditions, don't drive normally. It's a must to be more cautious and drive slowly.</li> <li>✗ Do not eat, mess with your stereo or otherwise be distracted when you're driving.</li> <li>✗ Don't make it a habit getting too close to other road users. Never assume that they are going to do what you expect them to do. There's nothing predictable when you're on the road.</li> <li>✗ Do not get upset with the behaviours of other road users – this might only make you distracted and lead to poor driving decisions.</li> <li>✗ Do not drink alcohol or use other drugs and drive.</li> <li>✗ Do not get in a car with a driver who has been drinking or using drugs.</li> <li>✗ Do not leave unsecured items or valuables in your vehicle especially in places where they can be seen, no matter where you are parked.</li> <li>✗ Do not smoke in company vehicles.</li> </ul>
--	---

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Vehicle Use

Safe Work Practice Number

SWP-E08

<ul style="list-style-type: none"> <li>✓ Where required, drivers must complete logbooks while operating commercial vehicles</li>   <li>✓ Use hands free devices if you must make a call.</li> </ul>	
---	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Road safety in Canada: Government of Canada publication
- The Official Ministry of Transportation (MTO) Driver's Handbook
- Ontario Highway Traffic Act, R.S.O. 1990, c. H.8

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Elevating Work Platforms

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk – see FLHA form	
Fall from heights Electrical contact Tip over Contact with fixed objects	 <b>Hard Hats</b>	 <b>Safety Footwear</b>
	 <b>Safety glasses with side shields</b>	 <b>Fall protection</b>

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ Workers must be trained to operate the class of EWP being used and be given oral and written instruction before using the platform for the first time. Instructions must include:               <ul style="list-style-type: none"> <li>○ The manufacturer’s instruction,</li> <li>○ Load limitations, limitations on the type of surfaces,</li> <li>○ A hands-on demonstration of the proper use of all controls</li> </ul> </li> <li>✓ Elevating work platforms must:               <ul style="list-style-type: none"> <li>○ Be situated on a firm and level surface</li> <li>○ Be operated only in accordance with the written instructions of the manufacturer</li> <li>○ Be equipped with guardrails</li> <li>○ Have signs that are clearly visible to an operator at its controls indicating its</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not load in excess of its rated working load</li> <li>✗ Do not place hands on the top rail when elevating or moving the machine. This creates a possible pinch point against fixed objects.</li> <li>✗ Do not load or use in such a manner as to affect its stability or endanger a worker</li> <li>✗ Do not move the machine unless all workers on it are protected against falling by a safety belt attached to the platform</li> <li>✗ Do not use an elevating work platform for pulling, pushing or dragging materials.</li> <li>✗ Do not use an elevating work platform in high wind conditions</li> <li>✗ Do not extend the platform on an elevating work platform by any means other than an extension device from the manufacturer.</li> <li>✗ Do not place makeshift platforms, such as boxes, or access equipment, such as ladders</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	October 23 <sup>rd</sup> 2025	2



# Elevating Work Platforms

<p>rated working load, all the limiting working conditions and warnings by the manufacturer (and direction of machine movement for non boom-type elevating work platforms)</p> <ul style="list-style-type: none"> <li>○ Have (clearly visible to the operator) the name and number of the national standards of canada standard to which it was designed and the name and address of its owner</li> <li>○ Have a maintenance and inspection record tag must be attached to the elevating work platform near the operator’s station. Such tag must include the date of the last maintenance and inspection, the signature and name of the person who performed the maintenance and inspection, and an indication that the maintenance has been carried out in accordance with the manufacturer’s recommendations</li> </ul> <ul style="list-style-type: none"> <li>✓ The area around the elevating work platform must be secured (access restricted by fencing or barriers) so as not to endanger any nearby worker</li> <li>✓ If the installation of guardrails is not practical because of the work scope or equipment setup, suitable alternative fall protection methods—such as travel restraint, fall arrest systems, or safety nets, etc. shall be utilized in compliance with applicable regulatory standards.</li> </ul>	<p>and scaffolds, on an elevating work platform to gain access to areas above.</p> <ul style="list-style-type: none"> <li>✗ Do not permit an overhanging load to be lifted on an elevating work platform.</li> <li>✗ Do not use an elevating work platform which is not working properly or which has sustained damage to critical components until repaired by a qualified mechanic.</li> </ul>
--	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	October 23 <sup>rd</sup> 2025	2



# Elevating Work Platforms

<ul style="list-style-type: none"> <li>✓ Workers on the platform must be protected from a fall by a safety harness attached to the platform when it is being moved</li> <li>✓ The operating manual must be kept with the elevating work platform</li> <li>✓ The elevating work platform must be used in accordance with the operating manual</li> <li>✓ The elevating work platform must be inspected daily by a trained worker</li> <li>✓ Keep a permanent record of all inspections, tests, repairs, modifications and maintenance performed on the elevating work platform. This record must include the name and signature of the persons who carried out the maintenance, tests or repairs.</li> <li>✓ Safe distance must be maintained from overhead energized power lines as dictated by the voltage of the power lines and relevant legislation</li> <li>✓ Workers need to be aware of the written emergency procedures in place (required to be established by the constructor) at the project in the event of an accident</li> </ul>	
--	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- O. Reg. 213/91, sections 21, 26 and 93
- PDI Safe Limits of approach

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	October 23 <sup>rd</sup> 2025	2



Safe Work Practice

# Elevating Work Platforms

Safe Work Practice Number

SWP-E09

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	October 23 <sup>rd</sup> 2025	2



Safe Work Practice

# Chainsaw Use

Safe Work Practice Number

SWP-E10

Potential Hazards Present (From Risk Assessment)	Required Personal Protective Equipment * may be required based on risk – see FLHA form			
Cuts and amputations Contusions Noise Flying objects/particles Chain kickback Fire Repetitive strain		<b>Safety Glasses with Side Shields</b>		<b>Hard Hats</b>
		<b>Gloves</b>		<b>Face Shield</b>
		<b>Chainsaw Pants*</b>		<b>Hearing Protection</b>
		<b>High Visibility</b>		<b>Protective Footwear</b>

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ Be trained by a qualified trainer in the care, use and maintenance of the piece of equipment being operated.</li> <li>✓ Use two hands to operate the saw.</li> <li>✓ Carry chain saw with bar to rear.</li> <li>✓ Operate and maintain in accordance with the manufacturers specifications</li> <li>✓ Ensure a mechanism that minimizes the risk of injury from kickback.</li> <li>✓ Use only chain saws that have been manufactured and maintained according to the CSA Standard Z62.1 "Chain Saws"</li> <li>✓ Use chainsaws that they are equipped with an anti-kick chain and chain brake.</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not stand directly behind a saw while cutting.</li> <li>✗ Do not refuel a chain saw with the engine running or the engine and muffler still hot.</li> <li>✗ Do not carry a saw for more than a short distance with the engine running.</li> <li>✗ Do not leave a running chain saw unattended.</li> <li>✗ Do not start a chain saw when it is resting against any part of your body.</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Chainsaw Use

<ul style="list-style-type: none"> <li>✓ Inspect the saw chain to ensure it is properly lubricated and is sharp. Sharpen and lubricate, as needed.</li> <li>✓ Wear all appropriate PPE for the task, such as gloves, safety headwear, eyewear and face shield, footwear, hearing protection, safety pants/chaps, etc.</li> <li>✓ Ensure no one in the surrounding area will be put at risk when you are using the saw.</li> <li>✓ Ensure that chain is clear of obstructions before starting.</li> <li>✓ Start the saw when secured on the ground.</li> <li>✓ Engage the chain brake before starting the chain saw.</li> <li>✓ Hold the saw firmly on the ground. Point the chain away from your body and nearby obstructions.</li> <li>✓ Use a quick, sharp motion on the starter cord.</li> <li>✓ Ensure that you have secure footing and that your stance is well balanced.</li> <li>✓ When carrying/transporting a chain saw, the bar guard must be in place, the chain bar must be toward the back and the motor must be shut off.</li> <li>✓ The chain saw must not be used for cutting above shoulder height</li> </ul>	
--	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Chainsaw Use

Safe Work Practice Number

SWP-E10

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Ontario Regulation for Construction Projects
- CSA Standard Z62.1-03 "Chain Saws"
- PDI PPE Standard
- PDI Safe Work Practice: Noise, Vibration

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Compressed Gas Cylinders

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk – see FLHA form	
Explosive Flammability High pressure Oxidizing Corrosive Toxic Cold temperature	 <b>Safety Glasses with Side Shields</b>	 <b>Hard Hats</b>
	 <b>Hand protection</b>	 <b>Steel Toed Boots</b>
		 <b>Respiratory Protection*</b>

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ Gas cylinders, when not in use, must be stored outdoors and in locked designated area(s).</li> <li>✓ Wear safety equipment appropriate for the hazard potential of the gas before beginning work</li> <li>✓ Different gases should be stored separately and isolated from other flammables, such as gasoline, solvents, oil and lumber.</li> <li>✓ Keep full cylinders separate from empty cylinders.</li> <li>✓ Gas cylinders are to be stored in an upright position, valve capped and secured in position.</li> <li>✓ A gas cylinder must be adequately secured when taken to a work area.</li> <li>✓ Use the smallest practical cylinder size for a particular job.</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not use a crane or hoist to transport gas cylinders – unless it is in an approved lifting cage or similar.</li> <li>✗ Do not use compressed air or gas to blow dust from their clothes and no one shall blow compressed air or gas at any other worker</li> <li>✗ Do not use vise grips or pipe wrenches on valves or connection.</li> <li>✗ Never open a damaged valve. Contact your gas supplier for advice.</li> <li>✗ Never use homemade adaptors or force connections between the cylinder valve outlet and gas handling equipment</li> <li>✗ Do not use excessive force when opening or closing a cylinder valve. When closing, turn it just enough to stop the gas flow completely. Never force the valve shut.</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Compressed Gas Cylinders

<ul style="list-style-type: none"> <li>✓ Always use proper fitting wrenches when making connections.</li> <li>✓ Check valves for leaks using a soapy liquid around the valve connection.</li> <li>✓ When moving cylinders, securely fasten them to a suitable cylinder transporting device.</li> <li>✓ At the site, chain or otherwise secure the cylinder in place.</li> <li>✓ Remove the valve cap only after the cylinder has been safely installed, then check the cylinder valve and fixture.</li> <li>✓ Remove any dirt or rust from the valve. Grit, dirt, oil or dirty water can cause gas leaks if they get into the cylinder valve or gas connection.</li> <li>✓ Use only the proper equipment for discharging a particular gas from its cylinder.</li> <li>✓ Cylinders stored in cold areas may have frozen valves. Use only warm water to thaw the valve or bring the cylinder into a warm area and allow it to thaw at room temperature</li> <li>✓ Always open valves on all gas discharge equipment slowly.</li> <li>✓ Close cylinder valves when the cylinder is not actually in use.</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not rapidly open valves.</li> <li>✗ Do not keep cylinders longer than the supplier recommends.</li> <li>✗ Do not drop cylinders or otherwise allow them to strike each other. Rough handling, including using cylinders as hammers or as rollers to move equipment, can seriously damage them</li> <li>✗ Do not strike an electric arc on a cylinder. Arc burns can make the metal brittle and weaken the cylinder.</li> <li>✗ Never tamper with cylinders in any way.</li> <li>✗ Do not repaint, change markings or identification, or interfere with valve threads or safety devices</li> </ul>
---	---

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Compressed Gas Cylinders

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- O. Reg. 214/01: COMPRESSED GAS
- Ontario Reg. 213/91: CONSTRUCTION PROJECTS
- PDI WHMIS Standard

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Ladders

Safe Work Practice Number

SWP-E12

Potential Hazards Present (From Risk Assessment)	Required Personal Protective Equipment <small>* may be required based on risk – see FLHA form</small>	
Fall Electrical contact	 <b>Safety Glasses with Side Shields*</b>	 <b>Hard Hats*</b>
	 <b>Fall Protection*</b>	 <b>Steel Toed Boots*</b>

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ Fiberglass ladders are required for any electrical work</li> <li>✓ Safe distance must be maintained from energized electrical equipment and overhead power lines. (see limits of approach SWP)</li> <li>✓ Inspect ladder for damage before each use (rungs, rails and feet)</li> <li>✓ Ensure minimum of a CSA- approved Grade 1 ladder</li> <li>✓ Fall protection and training may be required when working when feet are more than three metres from the walking surface</li> <li>✓ Plan to ensure that:               <ul style="list-style-type: none"> <li>• Pedestrian traffic is rerouted</li> <li>• Nearby doors are blocked open or locked (not emergency exits)</li> </ul> </li> <li>✓ Use stepladders only in the fully opened position with the spreader bars locked</li> <li>✓ Ensure level ground support</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not perform work from the top three rungs of a ladder or higher than the step indicated on the label marking</li> <li>✗ Do not use a damaged or defective ladder</li> <li>✗ Do not place ladder upon unstable bases (boxes, tables, scaffolds)</li> <li>✗ Do not use ladders near power lines.</li> <li>✗ Do not use ladders unless they have been inspected by a trained or competent person.</li> <li>✗ Do not set up or take a ladder down when it is extended.</li> <li>✗ Do not overextend. Maintain minimum overlap of sections.</li> <li>✗ Do not use ladders on ice, snow or other slippery surfaces without securing ladders' feet.</li> <li>✗ Do not extend top section of a ladder from above or by "bouncing" on a ladder.</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Ladders

<ul style="list-style-type: none"> <li>✓ Portable ladders in use must be secured against movement.</li> <li>✓ Hoist materials or attach tools to a belt.</li> <li>✓ Always face the ladder when ascending and descending</li> <li>✓ Maintain three points of contact</li> <li>✓ Keep belt buckle between the rails while maintaining a firm grip</li> <li>✓ Take your time when descending</li> <li>✓ Clean the climbing and gripping surfaces if they are soiled</li> <li>✓ Tag and remove from service all defective ladders and report to supervisor</li> <li>✓ Store protected from the weather, out of the sun and at temperatures below those recommended by the manufacturer</li> <li>✓ Secure ladder for safe storage</li> <li>✓ Choose a step ladder about one meter less than the height you wish to reach</li> <li>✓ For extension ladders:             <ul style="list-style-type: none"> <li>• access to an elevated work surface with an extension ladder, erect ladders so that a minimum of 1 m (3 ft) extends above a landing platform.</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not leave ladders unattended.</li> <li>✗ Do not use a ladder in a horizontal position as a scaffold plank or runway.</li> <li>✗ Do not carry objects in your hands while on a ladder.</li> <li>✗ Do not use items such as a chair, barrel or box as a makeshift ladder.</li> <li>✗ Do not use a portable ladder when other equipment and safe means of access is available. Replace a ladder with a fixed stairway or scaffold.</li> <li>✗ Do not join two short ladders to make a longer ladder. Side rails are not strong enough to support the extra load.</li> <li>✗ Do not paint wooden ladders. Defects may be hidden by the paint. Wood preservatives or clear coatings may be used.</li> </ul>
---	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1




Safe Work Practice

# Ladders

Safe Work Practice Number

SWP-E12

- Tie the top at support points
- Use a 1:4 base to height ratio

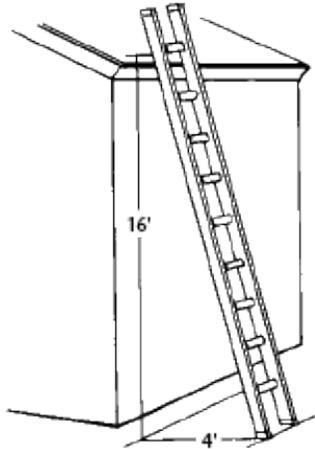

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Ontario Regulation for Construction Projects
- PDI Limits of approach Safe Work Practice

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Ladders

## Ladder Risk Assessment

Risk Assessment Question	Answer (Yes/No)	Hazard Control
Condition of ladder		
Does the ladder have visible damage (bent side rails, missing non-slip feet, missing components)		If Yes, remove from service.
Size/capacity/grade of ladder chosen		
For an extension ladder is the top of the ladder extending less than three feet above the supporting surface?		If yes, ladder is not long enough for the task
For an extension ladder is the set up less than the safe 1:4 ratio?		If yes, ladder is not long enough or space constraints make it unsuitable for ladder use.
For a step ladder, platform step ladder or trestle ladder will the user when standing on a step deemed suitable as per manufacturer's instructions be reaching overhead with the arms outstretched to perform work?		If yes, the ladder is likely too small for the vertical location of the task. Worker should be able to reach the task comfortably (i.e. working only slightly above head level, able to keep arms bent, not in full reach)
The ladder being used is not a Grade 1, 1A, 1AA?		If not; alternate ladder required to meet O. Regulation 213/91
Surface ladder is on and proximity to OH power lines		If yes, list measures taken (de-energize, other...)
Is the surface the ladder is on soft, uneven, sloping?		If yes: list measures taken to create a base of stability.
Is the area untidy with materials, supplies, cords etc. that may impact ladder stability and positioning for the work?		If yes; list measures taken to mitigate risk.
Ascending / Descending		
Is the worker's ability to maintain 3-limb contact and use both hands when going up or coming down the ladder affected by materials or tools they have in their hands?		If yes; list measures planned to mitigate risk.
Does the worker need to turn outward when ascending or descending?		If yes; this method is not appropriate and is a fall hazard. Alternate method must be chosen.
Receiving or Passing Items When on the Ladder/Proximity to overhead power lines		If yes, outline procedure/measures taken to avoid contact with live power lines
The worker must remove both hands from the ladder to receive or pass an item?		If yes; list control measures to mitigate risk.
When receiving or passing an item (tool/material) the worker's mid chest/belt buckle go outside the side rail of the ladder?		If yes; due to the worker position on the ladder even a small light load can impact balance. Alternate means of getting the load to the worker's position should be examined.
When receiving or passing an item (tool/material) the worker's hands are reaching below knee level when on the		

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Ladders

Safe Work Practice Number

SWP-E12

ladder?		
The worker needs to turn around or twist backward to receive or pass the item (tool/material)?		
The item (material/tool) being received or passed down is very heavy or awkward?		If yes; the load will impact the person's center of balance on the ladder and can lead to a fall. Alternate methods should be determined.
<b>Working From the Ladder</b>		
The worker's location on the step ladder (i.e. step they are working from) requires them to bend downward to grasp the top cap?		If yes: Consider a larger ladder. When working above the top cap of the ladder a worker who needs to regain stability should be able to grasp and attain 3-point contact with the ladder without bending and reaching downward.
Push, pull forces are required when on the ladder?		If Yes; examine orientation of the ladder and consider that a platform may be more suitable given the task demands.
The task requires the worker's mid chest/belt buckle to extend outside the side rails of the ladder.		If yes; platform may be more suitable for tasks that have longitudinal demands.
The location of the elevated work may require the worker to take one foot off the ladder?		If yes; a ladder is not suitable for the work being performed. Alternate access is needed.

**Decision:**

Did you answer "Yes" to any of the risk assessment questions?

Are there suitable controls that will protect the health and safety of the worker from the identified hazards?

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Scaffolding

Safe Work Practice Number

SWP-E13

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk – see FLHA form	
Electrical contact Fall from height Struck by falling material Scaffold collapse		<b>Hard Hat</b>
		<b>Fall Protection *</b>
		<b>Safety Footwear</b>
		<b>Hearing Protection*</b>
		<b>Gloves*</b>
		<b>Safety glasses</b>

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ Choose the right scaffolding system for the job. Considerations include:                             <ul style="list-style-type: none"> <li>• Weight of workers, tools, materials, and equipment to be carried by the scaffold</li> <li>• Site conditions (e.g., interior, exterior, backfill, concrete floors, type and condition of walls, access for the equipment, variations in elevation, anchorage points)</li> <li>• Height or heights to which the scaffold may be erected</li> <li>• Type of work that will be done from the scaffold (e.g., masonry work, sandblasting, painting, metal siding, mechanical installation, suspended ceiling installation)</li> <li>• Duration of work</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not overload. Overloading causes excessive deflection in planks and can lead to deterioration and breaking.</li> <li>✗ Do not have insufficient or excessive overhang of planks. Excessive overhang can cause a plank to tip up when a worker stands on the overhanging portion.</li> <li>✗ Do not move a rolling scaffold with personnel on board</li> <li>✗ Do not use blocking or packing such as bricks, short pieces of lumber, or other scrap materials either under scaffold feet or under mudsills</li> <li>✗ Do not exceed a ratio of height to least lateral dimension of 3 to 1 unless the scaffold is                             <ul style="list-style-type: none"> <li>• Tied to a structure,</li> </ul> </li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Scaffolding

<ul style="list-style-type: none"> <li>• Experience of the supervisor and crew with the types of scaffolds available</li> <li>• Requirements for pedestrian traffic through and under the scaffold</li> <li>• Anticipated weather conditions</li> <li>• Ladders or other access to the platform</li> <li>• Obstructions</li> <li>• Configuration of the building or structure being worked on</li> <li>• Special erection or dismantling problems including providing practical fall protection for the erector</li> <li>• The use of mechanical equipment to aid in erecting the scaffold.</li> </ul> <p>✓ Scaffolds should always be erected under the supervision of a competent worker.</p> <p>✓ In Ontario, Section 26 of the Construction Regulation requires that workers erecting, using, or dismantling scaffolds must be protected from falling by using guardrails, travel restraint, fall-restricting systems, or fall arrest systems</p> <p>✓ Frame scaffolds over 15 metres (50 feet) in height, and tube-and-clamp and systems scaffolds over 10 metres (33 feet), must be designed by a professional engineer.</p> <p>✓ Supervisors must ensure that the scaffolds are constructed in accordance with design requirements.</p>	<ul style="list-style-type: none"> <li>• Equipped with outrigger stabilizers to maintain the ratio of 3 to 1</li> <li>• Equipped with suitable guy wires.</li> </ul> <p>✗ Do not use braces with kinks, bends, or deformations</p> <p>✗ Do not allow debris and waste materials to collect on the platform</p> <p>✗ Do not work while standing on a barrel, box, stepladder, guardrail, or other object to gain extra height is extremely dangerous and is illegal in most jurisdictions, including Ontario.</p> <p>✗ Do not carry tools or materials by hand when climbing ladders. Wear a tool belt and pouch and move material up or down by rope</p> <p>✗ Do not use the scaffold if it appears that it is damaged in any way, has been tampered with or if there are components missing such as secured planking, guardrails, toe boards, debris nets or protective canopies</p> <p>✗ Do not walk on scaffold planking covered in ice, snow or mud.</p>
--	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Scaffolding

<ul style="list-style-type: none"> <li>✓ Scaffolds must be erected on surfaces that can adequately support all loads applied by the scaffold.</li> <li>✓ Scaffolds erected on any type of soil should have a mudsill.</li> <li>✓ To support scaffolds, backfilled soils must be well compacted and levelled.</li> <li>✓ The Construction Regulation (Ontario Regulation 213/91) requires that all scaffold platforms must be at least 450 mm (18 inches) wide.</li> <li>✓ Use proper grades of lumber and inspect planks before erection to ensure that there are no weak areas, deterioration, or cracks</li> <li>✓ All platforms above 2.4 meters (8 feet) must be fully decked</li> <li>✓ Guardrails are recommended during normal use for all scaffold platforms over 1.5 meters (5 feet) high.</li> <li>✓ A guardrail should consist of: <ul style="list-style-type: none"> <li>• A top rail about 1 meter (40 inches) above the platform</li> <li>• A mid-rail about halfway between the platform and the top rail</li> <li>• A toe board at least 89 mm (3 1/2") high at the platform level if made from wood, and</li> </ul> </li> </ul>	
--	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Scaffolding

<ul style="list-style-type: none"> <li>• Posts no more than 2.4 meters (8 feet) apart if made from wood. Guardrail posts can be farther apart if the materials used are adequate to support the loads specified.</li> <li>✓ Guardrails should be designed to resist the forces specified in the Construction Regulation</li> <li>✓ There may be situations where scaffolds must be used without guardrails. If there are no guardrails, personnel on the platform must tie off with a full body harness.</li> <li>✓ Before attempting to move rolling scaffolds in outdoor open areas, check the route carefully to ensure that no overhead wires are in the immediate vicinity</li> <li>✓ All wheels on rolling scaffolds shall have working brakes.</li> <li>✓ Provide adequate ladders. In addition, workers must use proper climbing techniques (three-point contact)</li> <li>✓ Whether built into frames, attached as a separate component, or portable, ladders are an important means of access to scaffold platforms.</li> <li>✓ Clear debris, extension cords, and tools away from areas around the top and bottom of ladders</li> <li>✓ Wind can lift light platform materials from the scaffold if they are not secured. When you</li> </ul>	
--	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Scaffolding

<p>anticipate severe wind conditions or when you are using high scaffolds, you should secure platform material</p> <p>✓ Scaffold materials should be inspected before use for</p> <ul style="list-style-type: none"> <li>• Damage to structural components</li> <li>• Damage to hooks on manufactured platforms</li> <li>• Splits, knots, and dry rot in planks</li> <li>• Delamination in laminated veneer lumber planks</li> <li>• All necessary components for the job</li> <li>• Compatibility of components</li> </ul>	
---	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Ontario Reg. 213/91: Construction Projects
- PDI SWP : Limits of approach, Working at heights, Guardrails
- [IHSA Safety Manual - Scaffolds](#)

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Electrical Safety (General)

Potential Hazards Present (From Risk Assessment)	Required Personal Protective Equipment <small>* may be required based on risk – see FLHA form</small>	
Electrical shock Fire /explosion (hazardous atmospheres) Arc flash	 <b>Safety Glasses with Side Shields</b>	 <b>Hardhats (type E)</b>
	 <b>Safety Footwear (omega symbol)</b>	

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ All employees are to provide awareness training on the contents of the electrical SWP (this document).</li> <li>✓ Live parts to which an employee may be exposed must be de-energized (lock out / tag out) before the employee works on or near them, unless de-energizing the parts introduces additional or increased hazards or is unfeasible due to equipment design or operational limitations.</li> <li>✓ Electrical work may only be performed by competent/qualified workers (electricians)</li> <li>✓ An electrical work permit is required prior to any electrical work begins.</li> <li>✓ A risk assessment must be completed for shock and arc flash prior to beginning work on any energized work.</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not work on potentially energized equipment without proper lockout procedures in place.</li> <li>✗ Do not use equipment, outlets or cords that are damaged or have exposed wiring.</li> <li>✗ Do not bypass the switch and operate equipment by connecting and disconnecting the power cord.</li> <li>✗ Do not block access to circuit breakers or fuse boxes.</li> <li>✗ Do not use electrical equipment in wet conditions or damp locations, unless the tool is connected to a GFCI.</li> <li>✗ Do not use a metal ladder or scaffold near any exposed energized electrical circuits or equipment.</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Electrical Safety (General)

<ul style="list-style-type: none"><li>✓ Personal protective equipment must be worn for protection from electrical shock and/or arc flash.</li><li>✓ Always refer to the manufacturer's recommended operating practices prior to using new electrical appliances, tools and equipment.</li><li>✓ All electrical tools and appliances will be double insulated or have a three prong plug-in.</li><li>✓ Portable electrical equipment used outdoors or in damp locations is to be equipped with ground fault circuit interrupters (GFCI)</li><li>✓ Only qualified and authorized electricians are allowed to service and repair electrical appliances, tools and equipment.</li><li>✓ Tools or equipment capable of conducting electricity shall not be used in close proximity to any live electrical installation or equipment</li><li>✓ Electrical equipment must be approved for its intended use.</li><li>✓ Prior to operating electrical powered tools and equipment, ensure that you are working on a dry surface.</li></ul>	<ul style="list-style-type: none"><li>✗ Do not expose conductive objects to energized electrical conductors or circuit parts operating at voltages greater than 30 V unless proper insulation is in place</li><li>✗ Do not store flammable materials must not be stored near electrical equipment</li></ul>
---	---

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Electrical Safety (General)

<ul style="list-style-type: none"> <li>✓ Keep power cords away from heat, water, oil, sharp edges and moving part</li>   <li>✓ Use only approved extension cords that have the proper wire size (gauge) for the length of cord and power requirements of the equipment that you are using.</li>   <li>✓ Extension and power supply cords are to be maintained in a safe condition</li>   <li>✓ Always stand to the side of a service box when resetting a breaker.</li>   <li>✓ All electrical tools must be CSA approved.</li>   <li>✓ Disconnect power tools from power source before making adjustments.</li>   <li>✓ Establish an electrical work zone for energized work with arc flash and shock boundaries</li>   <li>✓ Inspect all equipment prior to use.</li>   <li>✓ Any defective equipment needs to be immediately tagged "Out of Service" and removed.</li>   <li>✓ All electrical equipment is to be maintained in a safe condition. <ul style="list-style-type: none"> <li>○ Maintenance history is to be</li> </ul> </li> </ul>	
--	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Electrical Safety (General)

<p>considered for energized work.</p> <ul style="list-style-type: none"> <li>✓ Lock out / Tag out procedures are to be followed prior to working on or near live equipment.</li> <li>✓ Appropriate signage will be used to alert other workers in the area of electrical hazards.</li> <li>✓ If an arc flash occurs: <ul style="list-style-type: none"> <li>○ And the victim is still in contact with the source of electricity, do not touch the person. Shut off the power and contact emergency personnel immediately.</li> <li>○ In the event the electricity cannot be turned off, use nonconductive materials and attempt to remove the victim from the electrical source. However, rescue and response should only be conducted if individuals have been properly trained to do so.</li> <li>○ If victim is on fire, the flames can be smothered or doused.</li> <li>○ Do not attempt to remove clothing that is melted to the skin.</li> <li>○ Never tell a conscious victim to move,</li> </ul> </li> </ul>	
--	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Electrical Safety (General)

<p>as neck or spine injuries may have occurred as well. Attempting to move them could make injuries more severe.</p> <ul style="list-style-type: none"> <li>○ Check to see if they are breathing and if they have a pulse. If the victim is not breathing or does not have a pulse, you may need to begin CPR. Never perform artificial respiration on a victim that is breathing.</li> <li>○ Run cool, not cold, water over the burn. Never apply creams, ointments or ice. Once a burn has been cooled, it can be covered with a clean dry cloth.</li> <li>○ Avoid giving a victim food or water. Even if the victim feels fine, they should still seek medical attention. Certain effects of arc flash and electricity are not always immediately apparent.</li> </ul>	
---	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Ontario Regulation for Construction Projects
- PDI Limits of approach Safe Work Practice
- PDI Air Gap Safe Work Practice
- PDI Powered Hand Tools Safe Work Practice
- PDI Lock out Tag Out Safe Work Practice

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1




Safe Work Practice

# Electrical Safety (General)

Safe Work Practice Number

SWP-E14

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

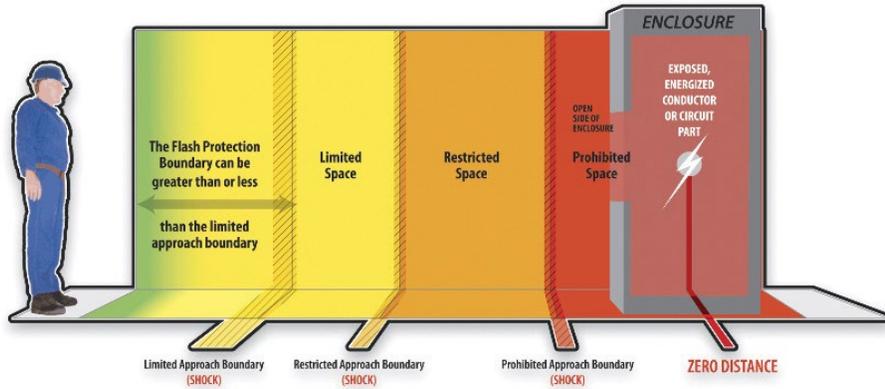

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Hoisting & Rigging

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk – see FLHA form			
Suspended loads Pinch points Electrical		<b>Safety Glasses with Side Shields</b>		<b>Hard Hats</b>
		<b>Hand protection</b>		<b>Hearing Protection *</b>
		<b>Steel Toed Boots</b>		<b>Hi Visibility Clothing</b>

DO	DO NOT
<p><b>Hoisting</b></p> <ul style="list-style-type: none"> <li>✓ Only a certified operator, (for the operation of the specific type and capacity of crane) may operate.</li> <li>✓ Ensure your lift will occur away from any electrical lines, utilities or other hazards.</li> <li>✓ Determine the weight of the object or load prior to a lift.</li> <li>✓ Ensure that the maximum load rating of rigging components as recommended by the manufacturer are not exceeded.</li> <li>✓ Inspect each chain or sling before each use for cuts, nicks, bent links, bent hooks etc. If in doubt, don't use it.</li> <li>✓ Ensure that the safety latch on hooks is in good working condition.</li> <li>✓ Ensure that all lifting chains and slings have a tag listing the safe working load limits.</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not exceed the working load limits of alloy chains or nylon lifting slings.</li> <li>✗ Do not permit anyone to ride the lifting hook or the load.</li> <li>✗ Do not leave a load suspended when the hoist or crane is unattended.</li> <li>✗ Do not work under a suspended load, unless the load is properly supported.</li> <li>✗ Do not shorten a sling by twisting or knotting.</li> <li>✗ Do not use bolts or nuts with chain slings.</li> <li>✗ Do not place yourself between material, equipment or any stationary object and the load swing.</li> <li>✗ Do not position yourself near stacked material that may be knocked over by a swinging load.</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Hoisting & Rigging

<ul style="list-style-type: none"> <li>✓ Damaged rigging must be clearly tagged “Out of Service”, removed from the work area and either repaired or replaced.</li> <li>✓ Use slings of proper reach.</li> <li>✓ Make sure all personnel stand clear from the load being lifted.</li> <li>✓ One member of the crew will act as the designated signal person and will wear the appropriate distinctive vest, armllets, etc.</li> <li>✓ The signal person will review the signals to be used with the crane operator.</li> <li>✓ Estimate the center of gravity or point of balance.</li> <li>✓ The lifting device should be positioned immediately above the estimated center of gravity.</li> <li>✓ Prepare a place to land the load, lower the load gently and make sure it is stable before slackening the sling or chain.</li> </ul> <p><b>Rigging</b></p> <ul style="list-style-type: none"> <li>✓ Only personnel who are trained and qualified may determine rigging configurations – with consultation of the crane operator.</li> <li>✓ Rigging inspections to be conducted weekly</li> </ul>	
---	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Hoisting & Rigging

- ✓ The signalman must be careful not to order a move until he has received the "all ready" signal from each member of the crew.
- ✓ Each rigger must be sure he's in the clear before he gives an "all ready" to the signalman.
- ✓ When you have positioned the sling or choker you're using, release it, if possible, before you give the "all ready" signal.
- ✓ If you must hold it in position, be sure your hand is clear of pinch points. In fact, your hand should be far enough away so there's no possibility of a frayed wire catching your glove and jerking your hand into a pinch point.
- ✓ Watch out for the roll or swing of the load. Anticipate the direction of the swing or roll and work away from it.
- ✓ To control the loads, tag lines are to be used. (when necessary)
- ✓ Look over the place where the load is to be set. Remove unnecessary blocks or other objects that might fly up if struck by the load.
- ✓ When lowering or setting the load, be sure your feet and all other parts of your body are out from under the load.
- ✓ Set the load down easily and slowly so that if it rolls on the blocking, it will be a slow shift that you can get away from.


JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Hoisting & Rigging

## Attaching Cable Clips and Clamping Wire Rope

- ✓ Wire the thimble to the rope at the desired point, then bend the rope around the thimble and secure temporarily by wiring the rope members together.
- ✓ First attach the clip farthest from the thimble and tighten (be sure the base of the saddle rests upon the live end of the rope and the "U" bolts on the short end).

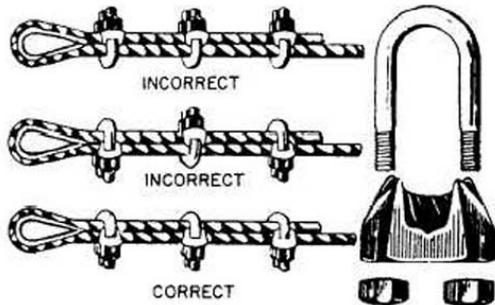

- ✓ The clip nearest the thimble goes on next. Do not tighten yet. If one or more additional clips are to be attached, place them at an equal distance apart between the clips already attached.
- ✓ Before tightening, it is advisable to place some stress on the rope to take up the slack and equalize the tension on both sides of the clip.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Hoisting & Rigging

Safe Work Practice Number

SWP-E15

<p>(Do not apply too much stress or the clip attached in Step 1 will not hold).</p> <ul style="list-style-type: none"> <li>✓ Tighten all clips.</li> <li>✓ All clips must be attached in this manner.</li> </ul>	
--	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Ontario Reg. 213/91: CONSTRUCTION PROJECTS
- PDI Electrical Limits of Approach Safe Work Practice
- Hand signals for hoisting operations
- Effect of angles on working load limits

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Hoisting & Rigging

HAND SIGNALS FOR HOISTING OPERATIONS

<p><b>Load Up</b></p> <p>1</p>	<p><b>Load Down</b></p> <p>2</p>	<p><b>Load Up Slowly</b></p> <p>3</p>	<p><b>Load Down Slowly</b></p> <p>4</p>	<p><b>Boom Up</b></p> <p>5</p>	<p><b>Boom Down</b></p> <p>6</p>
<p><b>Boom Up Slowly</b></p> <p>7</p>	<p><b>Boom Down Slowly</b></p> <p>8</p>	<p><b>Boom Up Load Down</b></p> <p>9</p>	<p><b>Boom Down Load Up</b></p> <p>10</p>	<p><b>Everything Slowly</b></p> <p>11</p>	<p><b>Use Whip Line</b></p> <p>12</p>
<p><b>Use Main Line</b></p> <p>13</p>	<p><b>Travel Forward</b></p> <p>14</p>	<p><b>Turn Right</b></p> <p>15</p>	<p><b>Turn Left</b></p> <p>16</p>	<p><b>Shorten Hydraulic Boom</b></p> <p>17</p>	<p><b>Extend Hydraulic Boom</b></p> <p>18</p>
<p><b>Swing Load</b></p> <p>19</p>	<p><b>Stop</b></p> <p>20</p>	<p><b>Close Clam</b></p> <p>21</p>	<p><b>Open Clam</b></p> <p>22</p>	<p><b>Dog Everything</b></p> <p>23</p>	<p>No response should be made to unclear signals.</p>


JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1





# Hoisting & Rigging

## Effect of angles on "Working Load Limit"

Angles have a negative effect on a web slings "Working Load Limit". As the angle from vertical increases, the "Working Load Limit" decreases. Use the chart on the right to estimate the degree of degradation to the sling.

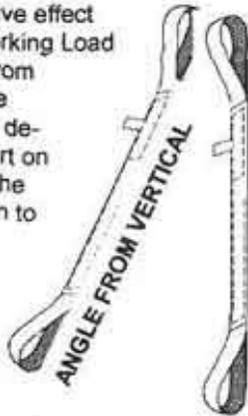

First determine the degree of angle from vertical. Then find the percent of degradation on the chart. Multiply it by the slings "Working Load Limit". If the net amount is less than the weight being lifted, a stronger sling must be used.

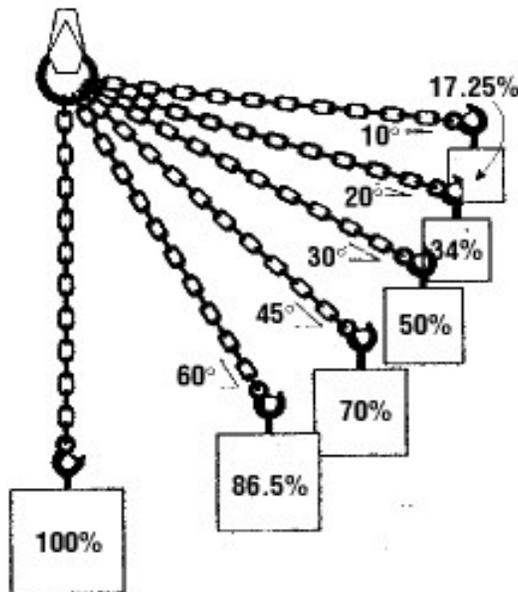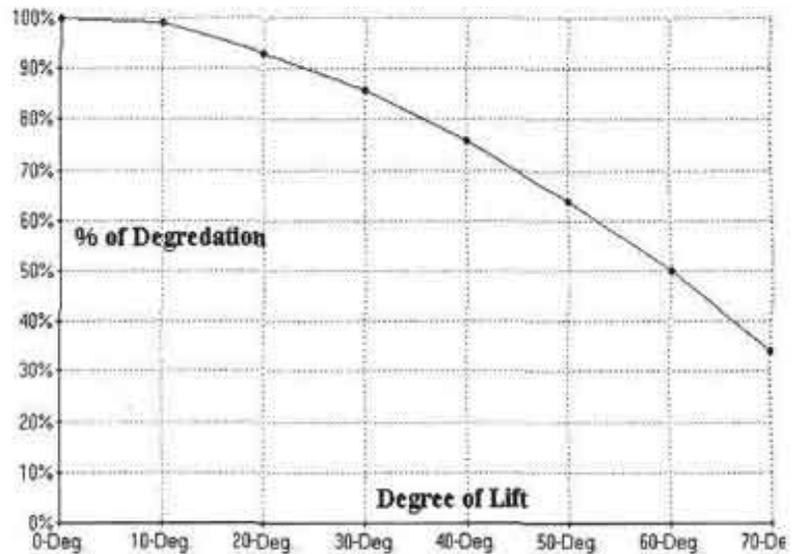

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Safe Use of Table Saws

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk – see FLHA form	
Amputation of fingers Lacerations Noise Dust / Debris	Hard Hat * 	High Vis Vest* 
	Safety Glasses 	Hearing Protection 
	Steel Toe Boots* 	


DO	DO NOT
<ul style="list-style-type: none"> <li>✓ Only trained and experienced workers are to operate a saw.</li> <li>✓ Pre-inspect saw (while unplugged) for possible defects before using.                             <ul style="list-style-type: none"> <li>• Check electrical cords, switches, blade guards, guides, push stick, fence, dust collection system.</li> </ul> </li> <li>✓ After turning on the saw make sure the emergency stop button works, if equipped.</li> <li>✓ Wear proper eye and hearing protection, and when required, respiratory protection or disposable respirator (N95).</li> <li>✓ Refer to and follow the table saw manufacturer’s instructions for reducing the risk of kickback.</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not perform free-hand sawing. The stock must be held firmly against the miter gauge or rip fence to position and guide the cut.</li> <li>✗ Do not feed the work piece faster than the saw can accept.</li> <li>✗ Do not reach around or over a moving saw blade.</li> <li>✗ Do not leave the table saw unattended while the saw blade is in motion. Turn off the power and make sure the machine has stopped running before leaving the area.</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Safe Use of Table Saws

- ✓ Make sure the guard is in place and working correctly.
- ✓ Choose the proper saw blade for the type of work being done.
- ✓ Keep saw blades clean, sharp and properly set so they will cut freely without being forced.
- ✓ Keep the work area clean. Operate the table saw in a non-congested, well-lighted area.
- ✓ Feed material into the saw blade counter to the direction of rotation.
- ✓ During cutting, keep hands out of the line of the saw cut.
- ✓ Use the saw blade guard with a spreader and anti-kickback fingers for ripping or cross cutting operations.
- ✓ Keep your body to the side of the saw blade out of the line of a possible kickback.
- ✓ Use a push stick when ripping narrow stock.

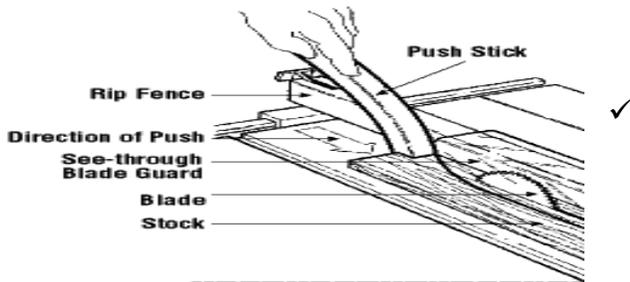


- ✓ When changing the saw blade:

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Safe Use of Table Saws

1. Stop the machine (table saw)
2. Disconnect the power supply.
3. Disconnect the table saw from power source. Place the plug end of the cord on top of the saw table and follow lock out/tag out procedures or manufacturer’s instructions for making repairs or servicing.
4. Replace the blade.

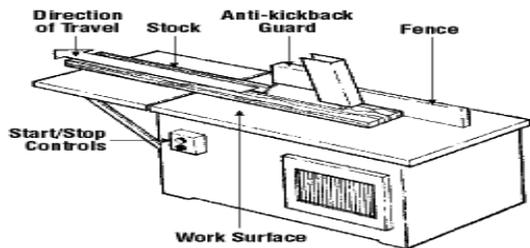

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Ensure that manufacturer’s instructions are present and followed at all times
- O. Reg 213/91 Equipment General

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Heavy Equipment Operation

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk	
Crushed - if your equipment overturns	 <b>Safety Boots*</b>	 <b>Gloves *</b>
Struck by or crushed by material being moved by heavy equipment		
Crushed - if caught between the equipment and a wall or other object	 <b>Hard Hat*</b>	 <b>Safety *Glasses</b>
Run over by a heavy vehicle.	 <b>Hearing Protection*</b>	 <b>High Visibility Clothing</b>
Electrocuted - if the equipment contacts an overhead power line		

DO	DO NOT
<p>The following requirements are considered minimum expectations for the use of heavy equipment. To confirm specific legislated requirements, vehicle operators should refer to the applicable safety and transportation regulations.</p> <ul style="list-style-type: none"> <li>✓ All workers operating, maintaining and refuelling heavy equipment or working near operational heavy equipment must complete and document a job-specific hazard or risk assessment.</li> <li>✓ Employees and contractors operating any heavy equipment must: <ul style="list-style-type: none"> <li>• Hold a current and valid driver’s license issued by the applicable provincial vehicle Licensing authority</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not operate heavy equipment when your judgement may be affected by prescription or over-the-counter medicines</li> <li>✗ Do not allow employee or contractor personnel under the age of 16 is permitted to operate heavy equipment</li> <li>✗ Do not allow persons to be transported on fenders, mounting steps, hooks, forks, pallets or in buckets, or by any other manner on the equipment other than as designed by the manufacturer for personnel transport</li> <li>✗ Do not operate heavy equipment that you are not certified to operate and/or that you have not been properly trained or authorized to operate</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# Heavy Equipment Operation

<ul style="list-style-type: none"> <li>• Have completed a vehicle operator safety course and hold a current and valid License or certificate, if applicable, to the equipment being operated</li> <li>• Be authorized by the operator’s employer to operate that specific type of equipment</li> <li>• Verify that the number of persons being transported does not exceed the manufacturer’s design specifications or the number of designated seats fitted with seat belts</li> <li>• Confirm that all personnel riding heavy equipment while it is in operation use seatbelts in a properly adjusted and securely fastened manner</li> <li>• Where seatbelts have been installed by the manufacturer – where installed by the manufacturer, seatbelts are not to be removed from heavy equipment</li> <li>• Verify that all personnel riding heavy equipment wear the safety protective equipment and clothing as required by the manufacturer, or as designated by the client.</li> <li>• Evaluate the assigned job, select the appropriate attachment(s) to complete the work, and use the attachment(s) solely for their designed task and for no other alternative purpose</li> <li>• Maintain or complete any operating logs or records for the equipment.</li> </ul> <p>✓ Each time an employee or contractor is assigned a task that involves operating heavy equipment, the vehicle operator shall conduct</p>	<ul style="list-style-type: none"> <li>✘ Do not permit a worker to remain within range of the moving load/part if a movement of the load/part creates a danger to workers</li> <li>✘ Do not move a load or equipment if a worker is exposed to danger</li> <li>✘ Do not use heavy equipment in severe weather or lightning conditions.</li> </ul>
---	---

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# Heavy Equipment Operation

<p>a pre-use inspection in accordance with manufacturer requirements.</p> <ul style="list-style-type: none"> <li>✓ Operate the heavy equipment at speeds, and in a manner, appropriate to the potential hazards of the workplace (e.g. personnel, obstructions)</li> <li>✓ Use a guide or spotter where equipment design or operating restrictions present blind spots</li> <li>✓ Use a guide or spotter whenever heavy equipment is moving through a congested work area</li> <li>✓ Be aware of the position of any person near the heavy equipment</li> <li>✓ Alert personnel to the presence and movement of the heavy equipment, including the operators of other heavy equipment or vehicles in the immediate vicinity</li> <li>✓ When mobilizing equipment to a worksite the equipment shall be clean and verified in working order</li> <li>✓ Heavy equipment operators must conduct a pre-shift walk-around of the equipment, including inspecting the condition of the roll-over protective structure (ROPS)</li> <li>✓ Maintain three-point contact when entering/mounting and exiting/dismounting the equipment and do not jump down</li> </ul>	
--	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# Heavy Equipment Operation

<ul style="list-style-type: none"> <li>✓ Use hearing, head and eye protection when exposed to hazards, especially when any windows or hatches are open on the cab</li> <li>✓ Whenever heavy equipment is moving or operating in the immediate vicinity of overhead or underground utilities or transmission systems, the hazards must be pre-identified, marked where not readily visible to the heavy equipment operator, and a guide or spotter assigned to alert the equipment operator should the equipment get too close to those hazards</li> <li>✓ Know the working range of the equipment and lift loads only within the safe lifting/working limit of the equipment</li> <li>✓ Properly secure all loads as per regulations</li> <li>✓ If equipment must be left unattended, the operator must ensure the equipment is secured against unintended movement, and elevated parts of the equipment, and the load are landed and/or secured in a safe position</li> <li>✓ Ensure safety/first aid kits and fire extinguishers are available, secured and up-to-date for inspection and/or certification</li> <li>✓ Audible warning devices (e.g. back-up alarm or beeper) must be installed and operable when reversing</li> <li>✓ Be familiar with, and understand, the operating limitations of the equipment, particularly involving crossing uneven ground</li> </ul>	
--	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# Heavy Equipment Operation

<p>or traversing hills of excessive angles (longitudinal or transversal slopes).</p> <ul style="list-style-type: none"> <li>✓ Keep in mind the hazards of loose or unconsolidated soils and ground and the potential for erosion or undercutting when working near watercourses, trenches or excavations.</li> <li>✓ Select stopping and parking areas with care. Always try to park the equipment on gravel, pavement or hard-packed ground to reduce the risk of soil subsidence that could result in vehicle entrapment or potential toppling of the equipment.</li> </ul>	
---	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- O. Reg. 213/91: CONSTRUCTION PROJECTS
- R.R.O. 1990, Reg. 856: ROLL-OVER PROTECTIVE STRUCTURES
- PDI SWP A22 Lightning
- PDI SWP A17 Limits of approach

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# Equipment Assembly & Disassembly

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk	
Pinch points Noise Slips / trips Collapse Moving machinery	 <b>Safety Boots*</b>	 <b>Gloves *</b>
	 <b>Hard Hat*</b>	 <b>Safety *Glasses</b>
	 <b>Hearing Protection*</b>	 <b>High Visibility Clothing</b>

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ Before commencing assembly or disassembly operations, ensure that the crew members understand all of the following, by reviewing the JHA and completing a CARS form:                             <ul style="list-style-type: none"> <li>• Their tasks.</li> <li>• The hazards associated with their tasks.</li> <li>• The hazardous positions/locations that they need to avoid.</li> </ul> </li> <li>✓ Follow manufacturer’s instructions</li> <li>✓ Select a work area with firm level ground under and surround the equipment to be worked on</li> <li>✓ Use scaffolds or elevating platforms to access elevated work areas when possible.</li> <li>✓ Ensure that <b><u>equipment is prevented from being operated or moved</u></b>, using proper lock out / tag out procedures as appropriate</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not enter areas under equipment being assembled or disassembled unless moving parts are blocked or secured</li> <li>✗ Do not modify components of equipment that affect load capacity or safety</li> <li>✗ Do not disable or remove any safety device</li> <li>✗ Do not place hands in pinch points</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31, 2020	November 15 <sup>th</sup> 2022	1



# Equipment Assembly & Disassembly

<ul style="list-style-type: none"> <li>✓ Use only OEM or equivalent bolts/pins</li> <li>✓ Block or otherwise immobilize parts that could shift position and injure a worker (such as rigid arms on grapples, hydraulic hoses, or folding conveyors)</li> <li>✓ When used to support components, blocking must be appropriately placed to: <ul style="list-style-type: none"> <li>• Protect the structural integrity of the equipment, and</li> <li>• Prevent dangerous movement and collapse</li> </ul> </li> <li>✓ When pins (or similar devices) are being removed, employees must not be under the boom, jib, or other components</li> <li>✓ Clean up any oil/fuel spills to avoid slip hazards</li> <li>✓ Cut off seized bolts, when possible, to avoid strain injuries from trying to break them loose</li> <li>✓ Use approved rigging with adequate capacity for the load being lifted and install rigging in a configuration that does not overload any part of the rigging</li> <li>✓ Ensure lifting devices are only operated by competent workers</li> <li>✓ Allow hot surfaces such as engines/pumps/hydraulic cylinders to cool down prior to working on them</li> </ul>	
--	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31, 2020	November 15 <sup>th</sup> 2022	1



# Equipment Assembly & Disassembly

<ul style="list-style-type: none"> <li>✓ Tag-out any equipment that is not complete or is unsafe to use, if assembly or disassembly is discontinued for any reason</li> <li>✓ If using a pry bar to move parts into alignment, keep hands/fingers out of pinch points</li> <li>✓ Use proper handles/handholds for opening/closing hoods</li> </ul>	
--	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- O. Reg. 213/91: CONSTRUCTION PROJECTS
- R.R.O. 1990, Reg. 851: INDUSTRIAL ESTABLISHMENTS
- PDI Safe Work Practice SWP E15 Rigging and Hoisting
- PDI Safe Work Practice SWP A09 Lock-out / Tag Out

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31, 2020	November 15 <sup>th</sup> 2022	1



# Powered Mobile Equipment

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk	
Contact with Machinery Noise Exhaust emissions Falls Contact with utilities Chemicals (oils, fuels)	 <b>Safety Boots*</b>	 <b>Gloves *</b>
	 <b>Hard Hat*</b>	 <b>Safety *Glasses</b>
	 <b>Hearing Protection*</b>	 <b>High Visibility Clothing</b>

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ Powered mobile equipment is to be only operated by competent workers</li> <li>✓ When equipped from the manufacturer, seatbelts must be worn</li> <li>✓ Ensure unattended vehicles are immobilized and secured against accidental movement.</li> <li>✓ Ensure that workers who operate mobile equipment are aware of the potential hazards of their specific site /workplace. i.e. power lines, terrain, load capacities</li> <li>✓ Establish reasonable safety zones between mobile equipment and workers/members of the public.</li> <li>✓ Ensure that no one approaches the mobile equipment until it has been stopped and the operator has indicated to the person it is safe to approach.</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not endanger personnel through careless handling of the machine.</li> <li>✗ Do not alter any safety device in any way that makes it ineffective.</li> <li>✗ Do not store flammable substances in the cab or carry loose articles</li> <li>✗ Do not operate any equipment that has had the Roll Over Protective Structure (ROPS) removed.</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Powered Mobile Equipment


<ul style="list-style-type: none"> <li>✓ Inspect equipment on a daily basis for safety defects by using and completing the equipment checklist.</li> <li>✓ Ensure maintenance is completed in accordance with manufacturers recommendations</li> <li>✓ Remove from service any equipment with a defect that could affect safety in any manner. Tag the defective equipment in accordance with company policy, and report the defect to the supervisor for repair or removal.</li> <li>✓ Always operate equipment at a speed suitable to the conditions.</li> <li>✓ Use competent signallers when required and ensure they are stationed in the correct position.</li> <li>✓ Ensure artificial lighting is provided if there is inadequate natural lighting, and that shadows and glare are reduced to a minimum.</li> <li>✓ Be aware of blind spots – see diagram below</li> </ul>	
--	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Powered Mobile Equipment

## Driver Blind Spots on Commonly Used Construction Vehicles (Dark Areas)

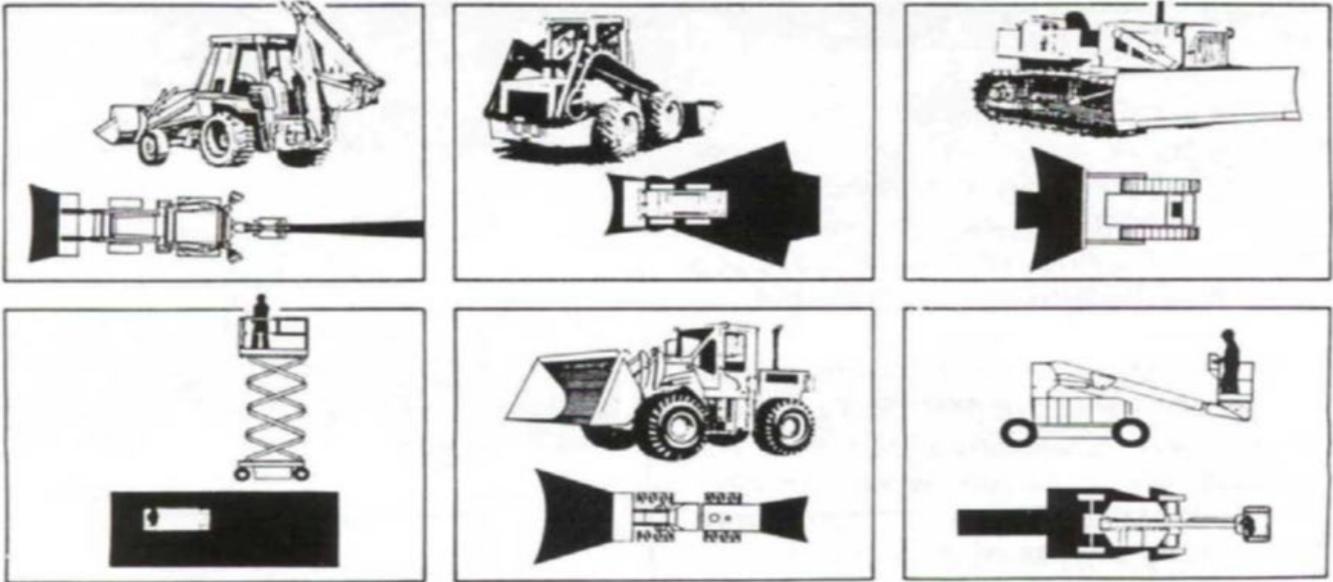

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- O. Reg. 213/91: CONSTRUCTION PROJECTS
- R.R.O. 1990, Reg. 851: INDUSTRIAL ESTABLISHMENTS Sections 24, 25, 75, 76
- PDI SWP E-03 Tag Out of Defective Equipment
- Roll-Over Protective Structures R.R.O. 1990, Regulation 856

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Procedure

# Shredder Operation

Safe Work Procedure Number

SWP-E20

Potential Hazards Present	Required Safety Devices		
<ul style="list-style-type: none"> <li>• Heavy Machinery</li> <li>• Pinch points</li> <li>• Slips and trips</li> <li>• Environmental conditions</li> <li>• Excavator coming in to contact with shredder while loading</li> <li>• Untrained and competent operator</li> <li>• Defective wireless remote control</li> <li>• Crushed or amputation</li> <li>• Magnets</li> <li>• Noise</li> <li>• Electrical November 5, 2019</li> </ul>		<b>Safety Glasses</b>	 <b>Hi Visibility Vest</b>
		<b>Hearing Protection</b>	 <b>Fire Extinguisher</b>
		<b>Steel Toed Boots</b>	 <b>Lock Out Tag Out</b>
		<b>Hard Hat</b>	 <b>Radio</b>
		<b>Gloves</b>	 <b>Barricades &amp; Signage</b>

## Required Materials & Equipment

- PPE
- Machine Operations Manual
- Inspection Log Book
- Wireless Remote Control
- Dozer
- Excavator
- Haul/Dump Trucks

## Procedure

<b>JH&amp;SC Review:</b>	<b>Approved By:</b>	<b>Date Created:</b>	<b>Date of Last Review:</b>	<b>Rev. No.</b>
Original Signed	Chris Letkeman	November 5, 2019	November 15 <sup>th</sup> 2022	1



# Shredder Operation

<b>Before You Start</b>	<p><b>OFFLOADING</b></p> <ul style="list-style-type: none"> <li>• Build a ramp if required</li> <li>• Slowly drive the machine down the loading platform via the ramp by means of the wireless control unit.</li> <li>• The machine tilts at the break-point between the loading platform and the ramp. Do not navigate while the machine tilts!</li> </ul> <p><b>LAYOUT/OPERATING POSTION</b></p> <ul style="list-style-type: none"> <li>• Moving the Shredder into position with the wireless remote control.             <ul style="list-style-type: none"> <li>✓ Stand to the side when traveling machine</li> <li>✓ Always keep a safe distance of 3 meters (10 feet)</li> <li>✓ Look where you are walking</li> <li>✓ All operating machinery in the area should stop operating.</li> </ul> </li> <li>• Position and set up shredder in the best possible level position and on stable ground. If the ground is slightly sloped, take appropriate measures to ensure that the machine is stable.</li> <li>• Take appropriate measures to prevent the machine from sinking into soft ground. In order to ensure safe and efficient equipment operation.</li> <li>• During the opening process of the discharge belt. Make sure that there is enough space for the discharge belt to open freely.</li> <li>• Seasonal conditions create additional hazards (icy or muddy condition pose a hazard of sliding or getting stuck)</li> <li>• Position for easy access for loading of the shredder and trucks off-loading material to the shredding area.</li> <li>• Make sure that all control panels are and remain easily accessible. Remember not to block emergency escape routes!</li> <li>• Only authorized persons are permitted access to the danger areas.</li> <li>• Observe all safety distances to other equipment and make sure that no other objects such as high-voltage power lines, other machines, etc. are within the machine's danger zone.</li> </ul> <p><b>PRE-OPERATIONAL SAFETY CHECKS</b></p> <ul style="list-style-type: none"> <li>• Check the stability of the machine.</li> <li>• Perform visual and operational checks of conveyor belts/rollers and moving components, according to manufacturer's specifications, in order to ensure safe and efficient operation.</li> </ul>
-------------------------	---

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	November 5, 2019	November 15 <sup>th</sup> 2022	1



# Shredder Operation

- Ensure all conveyor belts are shut down prior to initiating circle check procedure. All substandard conditions and problems must be reported to immediate supervisor. The circle check must be conducted at the beginning of each shift.
- 2-4 Pumps of grease daily are required for the shafts.
- Ensure the general readiness for operation of the engine and the machine. (Refill the fuel, check the coolant level and engine oil level, check the indication instruments.)
- Check all operating materials (hydraulic oil level, lubricant level of the central lubrication system, lubricating points, oil level in planetary gear sets and transfer boxes)
- Inspect the machine for damage and carry out required repairs immediately.
- Shredder Shafts need inspection. May have to weld more material to shafts due to wear
- Check cooling fins of the water cooling systems and the hydraulic oil cooling system for staining and clean these elements if required.
- Clean the engine compartment or keep it dust-free.
- Ensure you are familiar with all machine operations and controls (HMI control panel, wireless remote control and functionality of controls, etc.). Inspection of the safety and environmental equipment (Fire extinguisher, spill kit).
- Ensure wireless remote control is full charged
- Check for loose/missing nuts, bolts, belts and rollers. Tighten and/or replace as needed.
- Ensure all guards are fitted, secure and functional. Do not operate if guards are missing or faulty.
- Ensure the hopper feed intake, and shredder chamber are empty and free of all debris.
- Perform emergency shut down, according to manufacturer’s specifications.
- Know the location of each EMERGENCY-STOP BUTTON on the shredder, operating panel, the MACHINE STOP BUTTON on the wireless remote control, as well as further EMERGENCY-STOP BUTTONS behind the machine on the left-hand or right-hand side next to the discharge belt.

**During Your Work**

**ACCESS**

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	November 5, 2019	November 15 <sup>th</sup> 2022	1



# Shredder Operation

	<p>During mobile shredding operation, no person shall be allowed to access the shredding operations area, only authorized personnel. Equipment that is required for the shredding operation shall be allowed access to the shredding area during operation. Radio communication will be needed when accessing the shredder area.</p> <ul style="list-style-type: none"> <li>• Accessing the shredder during operation presents the following risks:             <ul style="list-style-type: none"> <li>✓ Struck by objects ejected from the shredder, such as bits of stone, wood or metal.</li> <li>✓ Struck by the excavator bucket or counter weight when within the working radius of the excavator.</li> <li>✓ Noise. Process noise at this level can cause deafness and adequate hearing protection is required.</li> </ul> </li> <li>• It may be necessary for maintenance personnel or the shredder operator with the appropriate PPE (e.g. gloves, hearing protection, eye protection, hard hat, protective footwear, Hi-Vis vest) to spend a time adjusting the feed speed initially if the remote is not responding or any belt adjustments needed.</li> </ul> <p><b>OPERATION</b></p> <ul style="list-style-type: none"> <li>• All operators working with the shredder are to be competent and trained.</li> <li>• Start-up and Warm-up phase. (See manufactures guidelines).</li> <li>• Let the hydraulic oil warm up before running the shafts.</li> <li>• Set drum speed, shredding program, engine speed, etc., a change of the material or the occurrence of extraneous materials may require a setting adjustment.</li> </ul> <p><b>FEEDING</b></p> <ul style="list-style-type: none"> <li>• The mobile shredder is to be fed directly by a excavator bucket/clam, then:             <ul style="list-style-type: none"> <li>✓ Excavator loading pad should be suitable (stable) and should be high enough for the operator to be able to monitor the feed hopper from the cab and the shredding area.</li> </ul> </li> <li>• The shredder will be fed with the demolition material (wood/metal) and the shredded material is to be discharged into waste/recycling piles. An electric magnet will be positioned over the discharge conveyor to separate metal and wood.</li> </ul>
--	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	November 5, 2019	November 15 <sup>th</sup> 2022	1



# Shredder Operation

	<ul style="list-style-type: none"> <li>• The shredder will be radio remote controlled from the cab of the excavator. This is to control the feed speed and control safe operation (e.g., emergency shut down)</li> <li>• Do not overload hopper feed intake. This could lead to a blockage at the top of the feed intake.</li> <li>• Keep the feeder full to maximize the shredders full potential.</li> <li>• All operators to be aware of the blind spots and excavator swing radius when operating around the shredding operation. Complete a swing radius check before starting feeding the shredder.</li> <li>• Be aware that the shredder discharges debris at very high speeds. This area remains out of bounds for any workers on foot or equipment. Never walk or drive under a moving conveyor belt.</li> <li>• Control traffic (e.g., light duty trucks) on an ongoing basis through radio communications and by barricades and signage.</li> <li>• Any unauthorized person on foot or equipment (e.g., light duty vehicle) observed within danger zone of shredding operation, the shredder will be shut down immediately.</li> </ul> <p><b>BLOCKED SHREDDER</b> Causes of shredder blockages can be grouped under two main headings:</p> <ul style="list-style-type: none"> <li>• <u>Stalling due to:</u> <ul style="list-style-type: none"> <li>✓ Electrical or mechanical failure</li> <li>✓ Entry of oversize metal (ex: oversize metal, harden mental)</li> </ul> </li> <li>• <u>Bridging due to:</u> <ul style="list-style-type: none"> <li>✓ Oversize feed material</li> </ul> </li> </ul> <p><b>PREVENTION BLOCKAGE</b> Every effort should be made to prevent oversize material or oversize metal entering into the shredder feed hopper by:</p> <ul style="list-style-type: none"> <li>• Reducing oversize material by crushing material with excavator or other means</li> <li>• Instructing the excavator operator not to load oversize material but sort the material.</li> <li>• Following the manufacturer’s recommendations on the rate, presentation of feed and shredding settings</li> <li>• Practicing good waste management and segregation of scrap steel entering into the wood shredding process.</li> </ul>
--	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	November 5, 2019	November 15 <sup>th</sup> 2022	1



# Shredder Operation

	<ul style="list-style-type: none"> <li>• Regular inspection of metal parts (e.g. bucket teeth, bucket wear plates and other harden steel etc.) to ensure they are unlikely to break off and enter the shredder feed</li> <li>• The strategic placing of electrical magnets to prevent oversize metal from entering the wood pile.</li> <li>• Maintenance of drive systems</li> <li>• Removal and adequate cleaning of the discharge pile from conveyer</li> </ul> <p><b>ACTION WHEN A SHREDDER BECOMES BLOCKED</b></p> <ul style="list-style-type: none"> <li>• Have a spotter on a ladder inspecting the jammed material until it becomes free. Have someone on the panel manually reversing the shafts.</li> <li>• Stop feeding material into the hopper and the shredder operator will reverse the shredder drive shaft to unblock the shredder.</li> <li>• If it appears that the shredder is still blocked. Shutdown the shredder as per manufacture operating manual and call for assistance.</li> <li>• If any repairs are to be done the shredder must be fully stopped and isolated (LOTO)</li> <li>• <u>Hazards encountered may be:</u> <ul style="list-style-type: none"> <li>✓ Poor or difficult access</li> <li>✓ Lock Out/Tag Out (LOTO) not implemented.</li> <li>✓ Being struck by material from the feeder, chute or projected material</li> <li>✓ Slipping and falling</li> <li>✓ Manual handling of material and equipment</li> <li>✓ Unexpected movement of shredder components</li> <li>✓ Stored energy from electrical, hydraulic, compressed air, mechanical sources and gravity</li> <li>✓ Unsafe placement of material removed from the shredder.</li> </ul> </li> </ul> <p><b>STALLED SHREDDER</b></p> <p>A stalled shredder should be treated as possibly being jammed with oversize metal or mechanical problems.</p> <ul style="list-style-type: none"> <li>• Notify supervision of the stalled shredder</li> </ul>
--	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	November 5, 2019	November 15 <sup>th</sup> 2022	1



# Shredder Operation

	<ul style="list-style-type: none"> <li>If, after careful examination, there appears to be no electrical or mechanical reason why the crusher has stalled, it may indicate that the shredder is jammed by oversize metal.</li> </ul> <p><u>Remember:</u></p> <ul style="list-style-type: none"> <li>Accidents have occurred to people who have not locked-out equipment when examined stalled equipment. Always lock-out and tag-out equipment (LOTO)</li> </ul> <p><b>GUARDING</b></p> <p>Inadequate guarding is a major cause of injury. Guarding integrity should be checked at regular intervals, particularly after cleaning or maintenance work. <b>Never</b> remove guards to clean up while the machine is in operation. If guards need to be removed, shut down the shredder and LOCKOUT</p> <p><b>DISCHARGE BELT ADJUSTMENT</b></p> <ul style="list-style-type: none"> <li>When performing the check, maintain a safe distance from the conveyor belts.             <ul style="list-style-type: none"> <li>✓ Run the machine until it is completely empty. Move the discharge belt to its lowest position.</li> <li>✓ Switch on the conveyor belts at the main control panel or remote control.</li> <li>✓ Check whether the discharge belt is running in the center.</li> <li>✓ If the discharge belt is not running in the center or is too loose or too tight, switch the conveyor belts back off.</li> <li>✓ Stop the engine by turning the start key to "0" position.</li> <li>✓ Remove the start key and keep it in a safe place.</li> <li>✓ Turn off and lock out-tag out the main switch.</li> <li>✓ Secure the machine against unauthorized switch-on.</li> <li>✓ Adjust the discharge belt tension and once the desired tension has been set switch on the machine and conveyor belts.</li> <li>✓ Check whether the discharge belt is running in the center.</li> </ul> </li> </ul> <p><b>DISCHARGE BELT CLEANOUT</b></p> <ul style="list-style-type: none"> <li>Shredder has to be ran until the shredder/belt is completely empty.</li> </ul>
--	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	November 5, 2019	November 15 <sup>th</sup> 2022	1



# Shredder Operation

	<ul style="list-style-type: none"> <li>• Shut down drum and belt</li> <li>• Travel the shredder back a safe distance from the discharge pile</li> <li>• Use dozer to remove waste wood.</li> </ul> <p><b>REPOSITION SHREDDER</b></p> <ul style="list-style-type: none"> <li>• It is essential where possible to segregate such as dozer, excavators, dump/haul trucks and pedestrians from moving plant by the use of physical barriers or signage.</li> <li>• Operating the machine from the main control panel in driving mode is not allowed.</li> <li>• Always us the wireless remote control and keep a safe distance of 3m (10 feet) away from the machine when traveling with the remote. <b>NOTE</b> Operating from the cable control panel in driving mode is allowed only in exceptional cases (e.g., defective wireless remote control).</li> <li>• In order for the machine to be moved, the following conditions must be met:             <ul style="list-style-type: none"> <li>✓ Engine ON</li> <li>✓ Drums OFF</li> <li>✓ Key switch not on Service</li> <li>✓ Select the drive function.</li> </ul> </li> </ul>
<p><b>After You Finish</b></p>	<p><b>SHUT DOWN</b></p> <ul style="list-style-type: none"> <li>• Daily shredding operation is complete, the machine must continue to run until it is completely empty.</li> <li>• Reset the drum speed and engine speed to the lowest value before shutting down the machine.</li> <li>• Wait for the red light to turn off on the main battery lockout before shutting the power off.</li> <li>• Only use the start key for shutting down the machine.</li> <li>• Do not use the main switch or the emergency stop button for shutting</li> <li>• Cleanup waste material around the shredder</li> <li>• Store wireless remote in charger</li> </ul>

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	November 5, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Procedure

# Shredder Operation

Safe Work Procedure Number

SWP-E20

- Manufactures Operating Manual (MOM)
- Occupational Health and Safety Act.
- ONTARIO REGULATION 213/91. CONSTRUCTION PROJECTS.
- PDI SWP A16 Safe Limits of approach
- PDI SWP 004 Noise
- PDI SWP A09 Lock out / Tag Out
- PDI SWP A21 Slip, Trip and fall Protection

This Safe Work Procedure must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original signed	Chris Letkeman	November 5, 2019	N/A	0

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	November 5, 2019	November 15 <sup>th</sup> 2022	1



# Machine Guarding – Rotating and Moving Equipment

Safe Work Practice Number

SWP-E21

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk	
<p>A wide variety of mechanical motions and actions may present hazards to workers. These can include:</p> <ul style="list-style-type: none"> <li>○ movement of rotating members</li> <li>○ reciprocating arms</li> <li>○ moving belts</li> <li>○ meshing gears</li> <li>○ cutting teeth</li> <li>○ and any parts that impact or shear</li> </ul>		
		
		

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ Ensure that exposed moving parts are guarded                             <ul style="list-style-type: none"> <li>○ This could include hoods on running vehicles, belt /chain driven equipment or drill presses.</li> </ul> </li> <li>✓ Safeguards must meet these minimum general requirements:                             <ul style="list-style-type: none"> <li>○ <b>Prevent contact:</b> The safeguard must prevent hands, arms, and any other part of a worker's body from making contact with dangerous moving parts. A good safeguarding system eliminates the possibility of the operator or another worker placing parts of their bodies near hazardous moving parts.</li> <li>○ <b>Secure:</b> Workers should not be able to easily remove or tamper with the safeguard,</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not wear loose fitting clothing and/or jewelry if they could come into contact with moving parts</li> <li>✗ Do not remove or modify a guard</li> <li>✗ Do not rely on machine guards as a substitute for locking out when clearing obstructions or performing maintenance.</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	November 5, 2019	November 15 <sup>th</sup> 2022	1



# Machine Guarding – Rotating and Moving Equipment

Safe Work Practice Number

SWP-E21

because a safeguard that can easily be made ineffective is no safeguard at all. They must be firmly secured to the machine.

- **Protect from falling objects:** The safeguard should ensure that no objects can fall into moving parts. A small tool which is dropped into a cycling machine could easily become a projectile that could strike and injure someone.
- **Create no new hazards:** A safeguard defeats its own purpose if it creates a hazard of its own such as a shear point, a jagged edge, or an unfinished surface which can cause a laceration. The edges of guards, for instance, should be rolled or bolted in such a way that they eliminate sharp edges.
- **Create no interference:** Any safeguard which impedes a worker from performing the job quickly and comfortably might soon be overridden or disregarded. Proper safeguarding can actually enhance efficiency since it can relieve the worker's apprehensions about injury.
- **Allow safe lubrication:** If possible, one should be able to lubricate the machine without removing the safeguards. Locating oil reservoirs outside the guard, with a line leading to the lubrication point, will reduce the need for the operator or maintenance worker to enter the hazardous area.


JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	November 5, 2019	November 15 <sup>th</sup> 2022	1



# Machine Guarding – Rotating and Moving Equipment

Safe Work Practice Number

SWP-E21

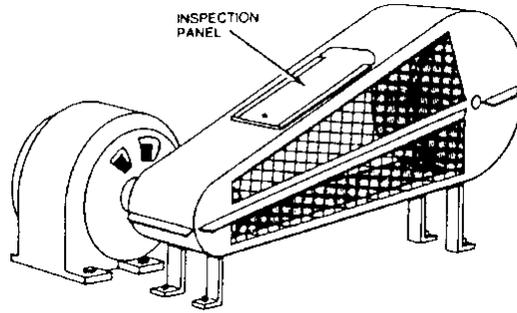

## Guidance Documents/ Standards/ Applicable Legislation/ Other:

- O. Reg. 213/91: CONSTRUCTION PROJECTS
- R.R.O. 1990, Reg. 851: INDUSTRIAL ESTABLISHMENTS Sections 24, 25, 75, 76
- PDI SWP: Lock out / Tag out
- CSA Standard Z432-16 Safeguarding of machinery

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	November 5, 2019	November 15 <sup>th</sup> 2022	1



# Cranes, Hoists and Lift Trucks

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk	
Overhead power lines Weight of Load Pinch points Other workers Noise Slips / trips	 <b>Safety Boots*</b>	 <b>Gloves *</b>
	 <b>Hard Hat*</b>	 <b>Safety *Glasses</b>
	 <b>Hearing Protection*</b>	 <b>High Visibility Clothing</b>

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ Only a competent worker can be charge of assembly / disassembly.</li> <li>✓ Lifting devices are to be only operated by competent workers</li> <li>✓ Every crane or similar hoisting device shall have affixed to it a load rating plate that:                             <ul style="list-style-type: none"> <li>○ The operator can read while at the controls; and</li> <li>○ Contains enough information for the operator to determine the load that can be lifted for each configuration of the crane.</li> </ul> </li> <li>✓ The owner of a crane or similar hoisting device shall keep a permanent record of all inspections of, tests of, repairs to, modifications to, and maintenance of the crane or similar hoisting device.</li> <li>✓ The owner of a crane or similar hoisting device shall prepare a log book for it for use at a project covering the immediately preceding twelve months and the period the</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not ever lift a load that is larger than the load limit with any crane.                             <ul style="list-style-type: none"> <li>○ Even loads that are slightly over the limit can be dangerous. If there is any doubt about a crane’s ability to lift a load, don’t lift that load.</li> </ul> </li> <li>✗ Do not let non-designated people communicate with the crane operator while in use. This can lead to mixed signals which will cause accidents.</li> <li>✗ Do not let workers “ride” on hoisting equipment, crane or lifting equipment, unless it has attachments or devices designed specifically to lift or transport people. Workers hanging from the crane can easily fall and get injured.</li> <li>✗ Do not operate a crane and hoist that is damaged or has any actual or suspected mechanical or electrical malfunction.</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	October 23 <sup>rd</sup> 2025	2



# Cranes, Hoists and Lift Trucks

<p>crane or similar hoisting device is on the project.</p> <ul style="list-style-type: none"> <li>✓ The log book shall be kept with the crane or similar hoisting device.</li> <li>✓ The owner of a crane or similar hoisting device shall retain and make available to the constructor on request copies of all log books and records for the crane or similar hoisting device.</li> <li>✓ A competent worker shall visually inspect the crane’s structural elements and the rigging equipment for defects before each use of the crane.</li> <li>✓ Report any defects of equipment, other hazards, and any contraventions immediately.</li> <li>✓ All cranes including overhead hoists must have the manufactures user manual with the equipment at all times.</li> <li>✓ Where the operator of a crane or similar material handling equipment does not have a full view of the intended path of travel of the crane or similar material handling equipment or its load, the crane or similar material handling equipment shall only be operated as directed by a signaller who is a competent person and who is stationed,             <ul style="list-style-type: none"> <li>○ In full view of the operator</li> <li>○ With a full view of the intended path of travel of the vehicle, mobile equipment, crane or similar material handling equipment and its load</li> <li>○ Clear of the intended path of travel of the crane or similar material handling equipment and its load.</li> </ul> </li> <li>✓ Follow all local regulations and requirements including permits for “critical lifts”.             <ul style="list-style-type: none"> <li>○ The Construction Safety Association of Ontario defines critical lifts as those</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not perform or allow any personnel to perform ANY work on a suspended load that requires that worker to be positioned under the suspended load.</li> <li>✗ Do not adjust or repair a crane or hoist unless qualified and authorized to perform such maintenance.</li> <li>✗ Do not use a hoist lead limiting device as a means to measure the load.</li> </ul>
--	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	October 23 <sup>rd</sup> 2025	2



# Cranes, Hoists and Lift Trucks

<p>lifts where the load weight is heavier than 75% of the rated capacity.</p> <ul style="list-style-type: none"> <li>○ Other examples of critical lifts include the following: <ul style="list-style-type: none"> <li>▪ Lifts in congested areas where structures, pipelines, power lines, or other obstacles are located.</li> <li>▪ Lifts that involving turning or flipping the load over where shock loading and/or side loading is likely to occur.</li> <li>▪ Lifts that involve machinery or assemblies furnished by others or lifts where the load weight is not known.</li> <li>▪ Lifts in areas of poor soil or unknown ground conditions.</li> <li>▪ Lifts involving potentially unstable pieces.</li> <li>▪ Lifts involving multiple cranes.</li> </ul> </li> </ul> <ul style="list-style-type: none"> <li>✓ All cranes and hoist systems shall undergo an annual inspection to ensure they remain in safe operating condition and comply with regulatory and manufacturer requirements.</li> <li>✓ The inspection to be carried out by a qualified individual who holds the certification or technical competency for the specific equipment type.</li> <li>✓ Document all inspection findings, maintain records for verification, audit, compliance review and implement actions to correct any identified deficiencies.</li> </ul>	
---	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	October 23 <sup>rd</sup> 2025	2



# Cranes, Hoists and Lift Trucks

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- O. Reg. 213/91: CONSTRUCTION PROJECTS
- R.R.O. 1990, Reg. 851: INDUSTRIAL ESTABLISHMENTS Sections 24, 25, 75, 76
- PDI Safe Work Practice SWP- A16 Safe Limits of Approach
- PDI Safe Work Practice SWP-16 Rigging and Hoisting

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	October 23 <sup>rd</sup> 2025	2



# Cranes, Hoists and Lift Trucks

## Basic Types and Configurations

The evolution of the mobile crane has led to many types and designs to satisfy both the general as well as the specific needs of construction and industrial operations. This manual is concerned with mobile cranes used for construction purposes as well as industrial applications.

The basic operational characteristics of all mobile cranes are essentially the same. They include:

- Adjustable boom lengths
- Adjustable boom angles
- Ability to lift and lower loads
- Ability to swing loads
- Ability to travel about the job site under their own power.

Within the broad category of mobile cranes there have evolved the following basic types and configurations:

- Boom Trucks
- Industrial Cranes
- Carrier-Mounted Lattice Boom Cranes
- Crawler-Mounted Lattice Boom Cranes
- Carrier-Mounted Telescopic Boom Cranes
- Crawler-Mounted Telescopic Boom Cranes
- Rough Terrain Cranes
- Mobile Tower Cranes
- Heavy Lift Mobile Cranes.



JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	October 23 <sup>rd</sup> 2025	2





# MS Altair 4x Bump Test Calibration



**Normal operating mode— shows all 4 gases**

- Press the down arrow button & hold (button on left when looking directly at the gas monitor)
- The screen will have the words BUMP TEST? displayed



JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# MS Altair 4x Bump Test Calibration

- Connect the Altair 4x Calibration cap to front of monitor, Insert tabs on calibration cap into slots on monitor



**Arrows indicate locations of clip fit position**

- Press down on calibration cap until all three tabs snap into place.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# MS Altair 4x Bump Test Calibration



**MSA monitor with Calibration cap attached**

- Connect one end of tubing to the calibration cap
- Connect the other end of the tubing to the cylinder regulator, which should be connected to the bump test gas cylinder
- Open valve on bump test calibration gas cylinder (rotate the regulator knob to the left to open)




JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# MS Altair 4x Bump Test Calibration

### Test gas bottle with regulator & tubing connected to calibration cap

- Press the power button to start the bump test, the hourglass will flash & the sensors will respond to the gas.

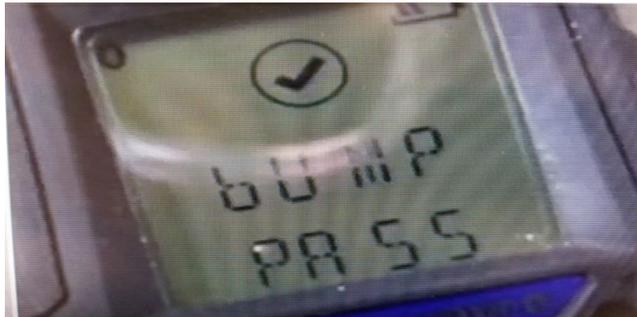

- Following the completion of the bump test, the instrument display will read BUMP PASS if passed OR BUMP ERROR if there is an issue with the monitor, along with the label of any sensor that failed before returning to measure mode
- Do not use the monitor if the bump test fails, and report to your supervisor / HSE department.
- Once bump test is successfully completed, a CHECK MARK symbol will appear on the upper right hand side of the display screen

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# MS Altair 4x Bump Test Calibration



**Calibration  
Procedure**

**Check mark symbol displayed**

- The checkmark will remain for 24hrs.

**ZERO CALIBRATION - Monthly**

Power up unit and start from normal operating mode

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# MS Altair 4x Bump Test Calibration



Normal mode (Screen shows reading of all four gases)

- Press & hold down the ARROW UP ▲ BUTTON (right button) for three seconds



- The unit screen will then display ZERO CAL?

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# MS Altair 4x Bump Test Calibration

- With the instrument exposed to fresh air, press the POWER BUTTON to confirm the ZERO CAL screen & begin the sensor calibration
- If the unit fails the calibration test the display will show “ZERO ERR” along with the flag (Identification) of any sensor(s) that failed. If this happens, DO NOT USE and report unit to supervision/Safety Dept. immediately.
- Upon successful completion of calibration, the units screen will momentarily display “ZERO PASS”



**After you finish**

- Press the power button to turn off.
- If test gas bottle is empty, do not dispose. Notify Supervision/H&S Dept.
- Properly store all materials involved in process properly (Test gas, Power cords, etc.)

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# MS Altair 4x Bump Test Calibration

- Occupational Health and Safety Act (OHSA), R.S.O. 1990
- CSA standards
- MSA ALTAIR 4x OPERATING MANNUAL

This Safe Work Procedure must be reviewed any me the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# MSA Altair 2x Bump Test Calibration

Safe Work Procedure Number

SWP-E24

Potential Hazards Present	Required Personal Protective Equipment: *may be required based on risk – see FLHA form	
<ul style="list-style-type: none"> <li>This instrument monitors gas concentration in ambient air</li> <li>This multi-gas detector tests for carbon monoxide only.</li> <li>Gas detectors require a “BUMP TEST” daily &amp; “RE-CALIBRATION” monthly.</li> </ul>	 <b>Fire Extinguisher*</b>	 <b>Gloves*</b>
	 <b>Safety Boots*</b>	 <b>Hard Hat*</b>
		 <b>Respiratory Protection*</b>
Required Materials & Equipment		
<ul style="list-style-type: none"> <li>Bump test gas cylinder               <ul style="list-style-type: none"> <li>Check expiration date of Gas</li> </ul> </li> <li>0.25 liters/min Flow Regulator</li> <li>1/8” ID Super thane ester tubing (Tube which connects to bottle &amp; clamp)</li> </ul>		
Procedure		
<b>Before You Start</b>	<ul style="list-style-type: none"> <li>The Altair 2X monitor has only one button - on the right below the sensor.</li> <li>Holding the button down will turn on the monitor.</li> <li>It will cycle for about a minute.</li> <li>You will see FAS on the screen (Fresh Air Set Up) – Hitting the button on the right again will allow the set up to continue</li> </ul>	

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# MSA Altair 2x Bump Test Calibration

Safe Work Procedure Number

SWP-E24



- When complete, it will show PASS and you will see a check mark.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# MSA Altair 2x Bump Test Calibration

Safe Work Procedure Number

SWP-E24



- The monitor is now in operating mode



JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# MSA Altair 2x Bump Test Calibration

<p><b>Bump Test Procedure Daily</b></p>	<ul style="list-style-type: none"><li>• Once ready for operation the unit will need to be bump tested.</li><li>• Bump testing should be done prior to every use.</li><li>• From normal operating mode, press the button on the right and wait until you see BUMP on the screen, then press the button again.</li></ul>  <ul style="list-style-type: none"><li>• Connect the tubing to the cylinder regulator, which should be connected to the bump test calibrating gas.</li><li>• There is not a cap cover for the Altair 2X, so simply place the open end of the tubing to the sensor</li></ul>
---	---

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# MSA Altair 2x Bump Test Calibration



- Open valve on bump test gas cylinder (rotate left)
- The monitor will perform a bump test.



- Once it passes it will flash GREEN and then you will see PASS

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# MSA Altair 2x Bump Test Calibration

Safe Work Procedure Number

SWP-E24



- The unit can now be used

- Calibration of the monitor must be completed on a monthly basis, as a minimum.
- If the bump testing failed, you will also need to **calibrate the monitor**.
- To calibrate, from normal operating mode, press the button on the right and wait until you see BUMP on the screen, then press the button again.

Calibration  
Monthly



JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# MSA Altair 2x Bump Test Calibration

- When you see the word ZERO, hit the button, which will zero the unit out.
- You will then see the word SPAN, press the button again which will allow you to commence the calibration.
- Put one of the hose ends to the sensor, turn the gas on just like you would to bump test the monitor and hold it to the meter.



- Once it passes it will flash GREEN and then you will see a check mark once it is at zero.



JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



Safe Work Procedure

# MSA Altair 2x Bump Test Calibration

Safe Work Procedure Number

SWP-E24

	<ul style="list-style-type: none"> <li>The unit is now calibrated</li> </ul>
<b>After You Finish</b>	<ul style="list-style-type: none"> <li>To turn off the device, hold the button down until the monitor beeps and completely turns off.</li> <li>If calibration fails notify safety department ASAP</li> <li>If test gas bottle is empty, Do not dispose of, Notify Supervision/H&amp;S Dept.</li> </ul>

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Occupational Health and Safety Act (OHSA), R.S.O. 1990
- CSA standards
- MSA ALTAIR 2x OPERATING MANNUAL

This Safe Work Procedure must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original signed	Chris Letkeman	January 31, 2020	N/A	0

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1




# Knife Safety

Potential Hazards Present	Required Personal Protective Equipment * May be required based on risk – See FLHA form	
<ul style="list-style-type: none"> <li>• Cuts or Lacerations</li> <li>• Puncture</li> <li>• Amputations</li> <li>• Sprains</li> <li>• Strains</li> </ul>	 <b>Hand protection</b>	 <b>Safety Glasses</b>
	 <b>Puncture Resistant Gloves*</b>	 <b>Hard Hat*</b>
	 <b>Safety* Footwear</b>	


DO	DO NOT
<ul style="list-style-type: none"> <li>✓ Although the use of knives is not banned ensure that all alternatives are considered prior to use.</li> <li>✓ Wear approved PPE as noted.</li> <li>✓ Ensure the level of cut resistance matches the task.</li> <li>✓ Evaluate whether other hazards need to be addressed i.e. puncture resistance, tear, etc.</li> <li>✓ If the Knife has a retractable blade, retract it immediately after use, and retract it fully.</li> <li>✓ Ensure that the manufacturer’s instructions are present and always followed.</li> <li>✓ Inspect the tool before use.</li> <li>✓ The blade must be sharp. Report when your knife is blunt and needs to be sharpened or replaced.</li> <li>✓ Rest the workpiece on a firm and stable surface, never on your lap or in the palm of your hand.</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not use knife as a substitute for pry bar, can opener, chisel, punch, awl, scraper, or screwdriver.</li> <li>✗ Do not apply excessive pressure when cutting.</li> <li>✗ Do not try to catch a falling knife.</li> <li>✗ Do not try to cut while distracted.</li> <li>✗ Stop cutting if you need to look up or focus on something else.</li> <li>✗ Do not store knives with the cutting edge of the blade exposed.</li> <li>✗</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	November 30, 2023	February 10 <sup>th</sup> 2024	1

- ✓ Utilize clamps, when possible, to hold the workpiece instead of your hands. Where possible, use a mechanical device to hold the item.
- ✓ Open blade knives must be stored in sheaths.
- ✓ Store tools appropriately.
- ✓ Work in a well-lit space so you can see what you are doing.
- ✓ Always concentrate on what you are cutting.
- ✓ Cut away from your body. Make sure no body parts are in the cutting path, or in the path the blade might take if it slips.

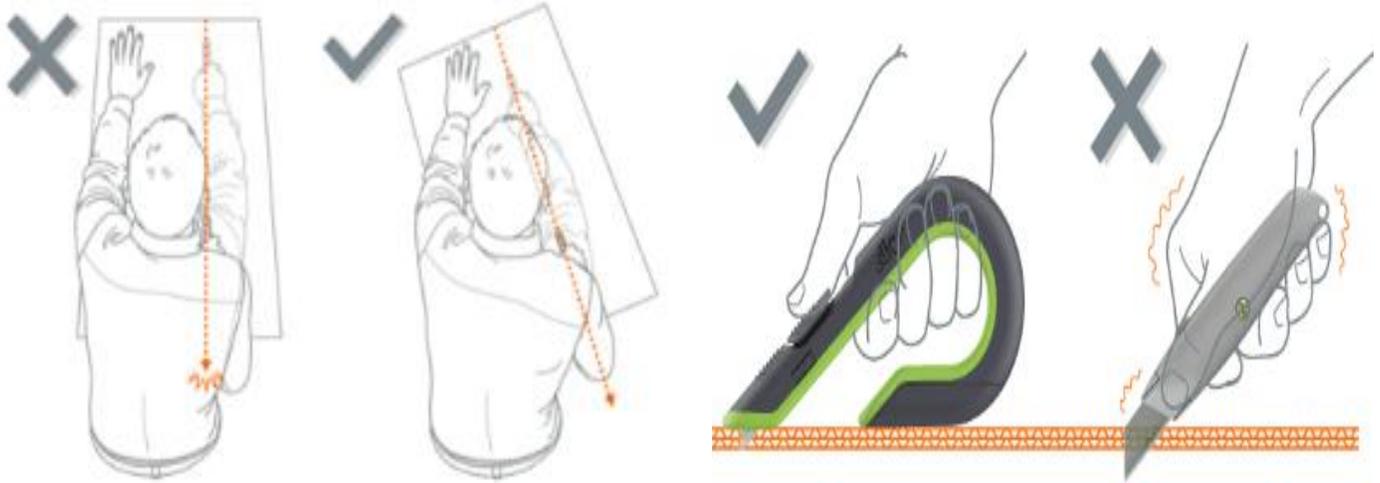

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	November 30, 2023	February 10 <sup>th</sup> 2024	1

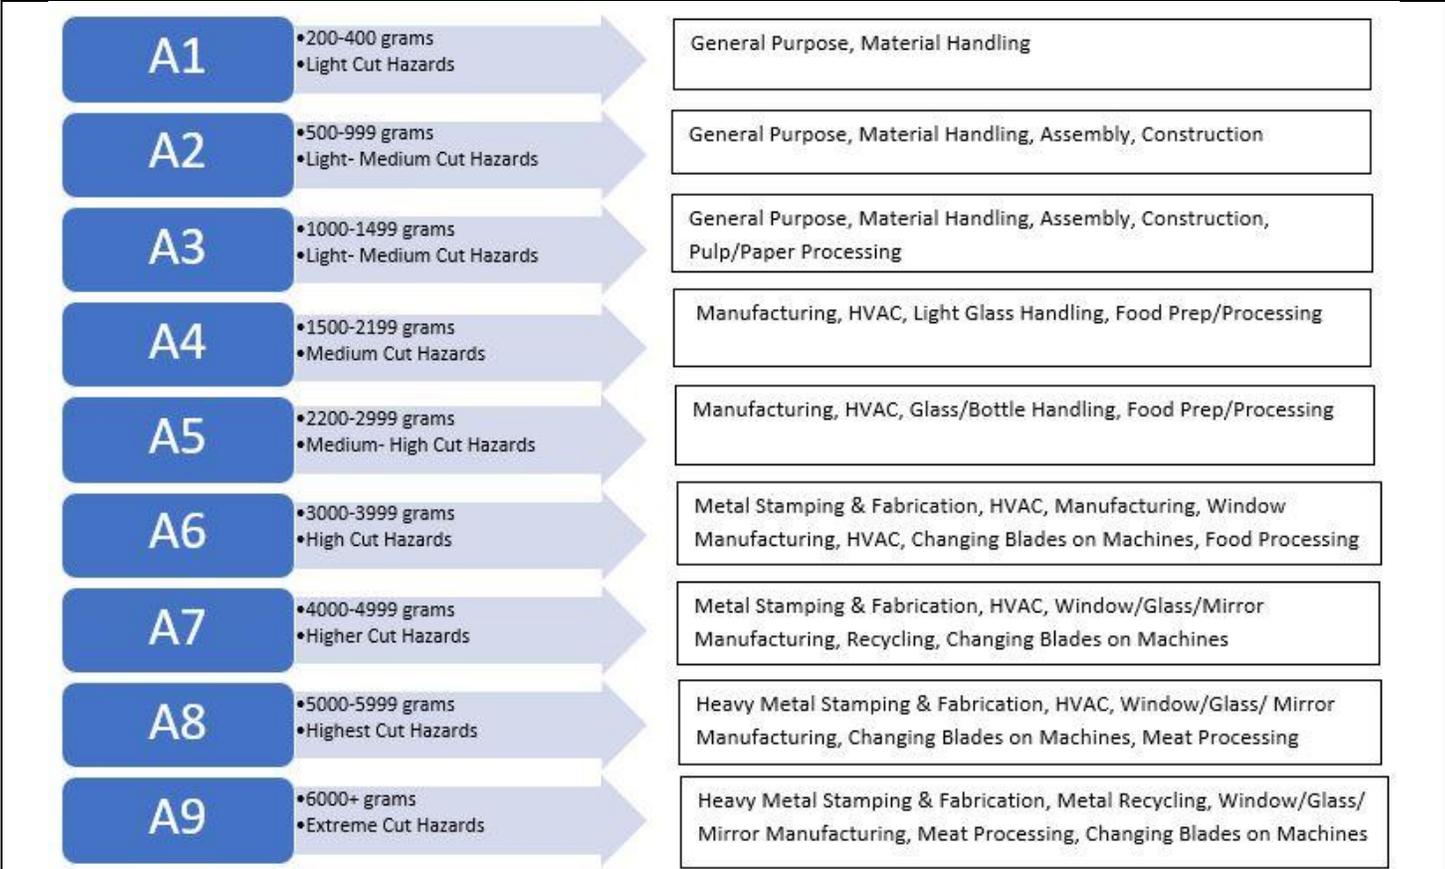

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

Canadian Centre for Occupational Health and Safety  
[https://www.ccohs.ca/oshanswers/safety\\_haz/sharp\\_blades.html?=&wbdisable=true](https://www.ccohs.ca/oshanswers/safety_haz/sharp_blades.html?=&wbdisable=true)  
<https://ehs.yale.edu/sites/default/files/files/utility-knives.pdf>

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	November 30, 2023	February 10 <sup>th</sup> 2024	1



Safe Work Practice

# WHMIS

Safe Work Practice Number

SWP-001

Potential Hazards Present		Required Personal Protective Equipment * may be required based on risk – see FLHA form	
 Compressed Gas	 Acute Toxicity	 Safety Glasses	 Steel Toed Boots*
 Corrosive	 Health Hazard	 Face Shield*	 Hard Hat*
 Environmental Hazard	 Acute Health	 Hand Protection*	 Protective Clothing*
 Explosive	 Oxidizing		
 Flammable	 Biohazard	 Respiratory Protection*	 Fire Extinguisher*

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ Wear approved PPE as noted</li> <li>✓ Ensure that you have received adequate WHMIS instruction</li> <li>✓ Be aware of company Emergency Procedures</li> <li>✓ Know the location of the Safety Data Sheets (SDS) for the products you are working with.</li> <li>✓ Read and review the SDS to determine all relevant chemical properties and all required precautions of the substance(s) you will be working with</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not use hazardous products without reading the SDS for Safety Precautions</li> <li>✗ Do not use a product with a missing or damaged label</li> <li>✗ Do not accept delivery of hazardous products without their SDS's and Supplier Label</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# WHMIS

Safe Work Practice Number

SWP-001

<ul style="list-style-type: none"> <li>✓ Know the location of First Aid Kits and Eye Wash Stations</li> <li>✓ Ensure all hazardous products have a Supplier Label affixed</li> <li>✓ If product is put into another container it must be affixed with a Workplace Label</li> <li>✓ Always replace missing or illegible labels</li> </ul>	
--	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Ensure that SDS's are present and followed at all times
- [WHMIS Regulation - Ontario](#)
- [https://www.ihsa.ca/rtf/health\\_safety\\_manual/pdfs/health/WHMIS.pdf](https://www.ihsa.ca/rtf/health_safety_manual/pdfs/health/WHMIS.pdf)
- PDI Standard 11: WHMIS

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	N/A	0

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Safe Work Practice

# Cold Stress

Safe Work Practice Number

SWP-002

Potential Hazards Present	Required Personal Protective Equipment <small>* may be required based on risk – see FLHA form</small>
Low temperature exposure	<span style="font-size: 1.2em; font-weight: bold; margin-left: 10px;">Warm Clothing</span>

DO	DO NOT
----	--------

- ✓ Wear PPE as noted
- ✓ Wear several layers of clothing rather than one thick layer
- ✓ Wear synthetic fabrics next to the skin to “wick” away sweat
- ✓ Wear a waterproof or wind resistant outer layer
- ✓ Wear warm gloves and a hat, as appropriate
- ✓ Change into dry clothes if you become wet in the cold
- ✓ Consume warm high calorie drinks and food
- ✓ Report all Cold Stress related symptoms
- ✓ Follow recommended schedule of breaks as directed

- ✗ Do not restrict blood flow with tight fitting footwear
- ✗ Do not rub skin
- ✗ Do not ignore symptom of cold exposure: see below

## Signs and Symptoms

*Hypothermia and Frostbite*

### Hypothermia

Sign	Symptom
Pale	Confusion
Shivering (may stop as condition worsens)	Drowsiness
Lack of coordination	
Eventual unconsciousness	

### Frostbite

Sign	Symptom
Hard, stiff skin	Prickling pain in affected area/s
White, waxy skin	Numbness
Impaired movement	



Frostbite on the fingers

Air temperature (sunny sky)		No noticeable wind		8 km/h wind (5 mph)		16km/h wind (10 mph)		24 km/h wind (15 mph)		32 km/h wind (20 mph)	
°C (approx.)	°F (approx.)	Max work period	No. of breaks								
-26° to -28°	-15° to -19°	Normal breaks	1	Normal breaks	1	75 minutes	2	55 minutes	3	40 minutes	4
-29° to -31°	-20° to -24°	Normal breaks	1	75 minutes	2	55 minutes	3	40 minutes	4	30 minutes	5
-32° to -34°	-25° to -29°	75 minutes	2	55 minutes	3	40 minutes	4	30 minutes	5	<b>Non-emergency work should stop</b>	
-35° to -37°	-30° to -34°	55 minutes	3	40 minutes	4	30 minutes	5	<b>Non-emergency work should stop</b>			
-38° to -39°	-35° to -39°	40 minutes	4	30 minutes	5	<b>Non-emergency work should stop</b>					
-40° to -42°	-40° to -44°	30 minutes	5	<b>Non-emergency work should stop</b>							
-43° and below	-45° and below	<b>Non-emergency work should stop</b>									

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Cold Stress

Safe Work Practice Number

SWP-002

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- [https://www.ihsa.ca/rtf/health\\_safety\\_manual/pdfs/health/Cold Stress.pdf](https://www.ihsa.ca/rtf/health_safety_manual/pdfs/health/Cold_Stress.pdf)

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Heat Stress

Safe Work Practice Number

SWP-003

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk – see FLHA form
High temperature	 <b>Drinking Water</b>

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ Avoid extended work in hot environments, when possible</li> <li>✓ Stay hydrated</li> <li>✓ Wear loose, breathable clothing when possible</li> <li>✓ Know the symptoms of heat stress and heat stroke and treat appropriately – see guidance documents</li> <li>✓ Plan work schedules to coordinate strenuous activities with cooler periods</li> <li>✓ Turn off external heat sources, when possible i.e. equipment</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not use salt tablets unless directed by a doctor</li> <li>✗ Do not expose yourself to direct sunlight for extended periods, if possible</li> <li>✗ Do not wear dark colored clothing, when possible</li> <li>✗ Do not continue to work if you experience symptoms associated with sunstroke or heat exhaustion</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Heat Stress

✓ Take appropriate rest periods based on the environmental factors i.e. temperature and humidex

Humidex 1 General Controls	Response	Humidex 2 Job-Specific Controls
25 - 29	Supply water to workers on an "as needed" basis.	32 - 35
30 - 33	<ul style="list-style-type: none"> <li>Post Heat Stress Alert notice.</li> <li>Encourage workers to drink extra water.</li> <li>Start recording hourly temperature and relative humidity.</li> </ul>	36 - 39
34 - 37	<ul style="list-style-type: none"> <li>Post Heat Stress Warning notice</li> <li>Notify workers that they need to drink extra water.</li> <li>Ensure workers are trained to recognize symptoms.</li> </ul>	40 - 42
38 - 39	<ul style="list-style-type: none"> <li>Give workers a 15-minute break every hour.</li> <li>Provide adequate cool (10-15°C) water.</li> <li>Provide at least 1 cup (240 ml) of water every 20 minutes.</li> <li>Send workers with symptoms to get medical attention.</li> </ul>	43 - 44
40 - 41	<ul style="list-style-type: none"> <li>Give workers a 30-minute break every hour.</li> <li>Provide adequate cool (10-15°C) water.</li> <li>Provide at least 1 cup (240 ml) of water every 20 minutes.</li> <li>Send workers with symptoms to get medical attention.</li> </ul>	45 - 46*
42 - 44	<ul style="list-style-type: none"> <li>Give workers a 45-minute break every hour (unless this is not practicable).</li> <li>Provide adequate cool (10-15°C) water.</li> <li>Provide at least 1 cup (240 ml) of water every 20 minutes.</li> <li>Send workers with symptoms to get medical attention.</li> </ul>	47 - 49*
45 or over	Only medically supervised work can be done.	50* or over

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**


- [https://www.ihsa.ca/rtf/health\\_safety\\_manual/pdfs/health/Heat\\_Stress.pdf](https://www.ihsa.ca/rtf/health_safety_manual/pdfs/health/Heat_Stress.pdf)
- [https://www.labour.gov.on.ca/english/hs/pubs/gl\\_heat.php](https://www.labour.gov.on.ca/english/hs/pubs/gl_heat.php)

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Heat Stress

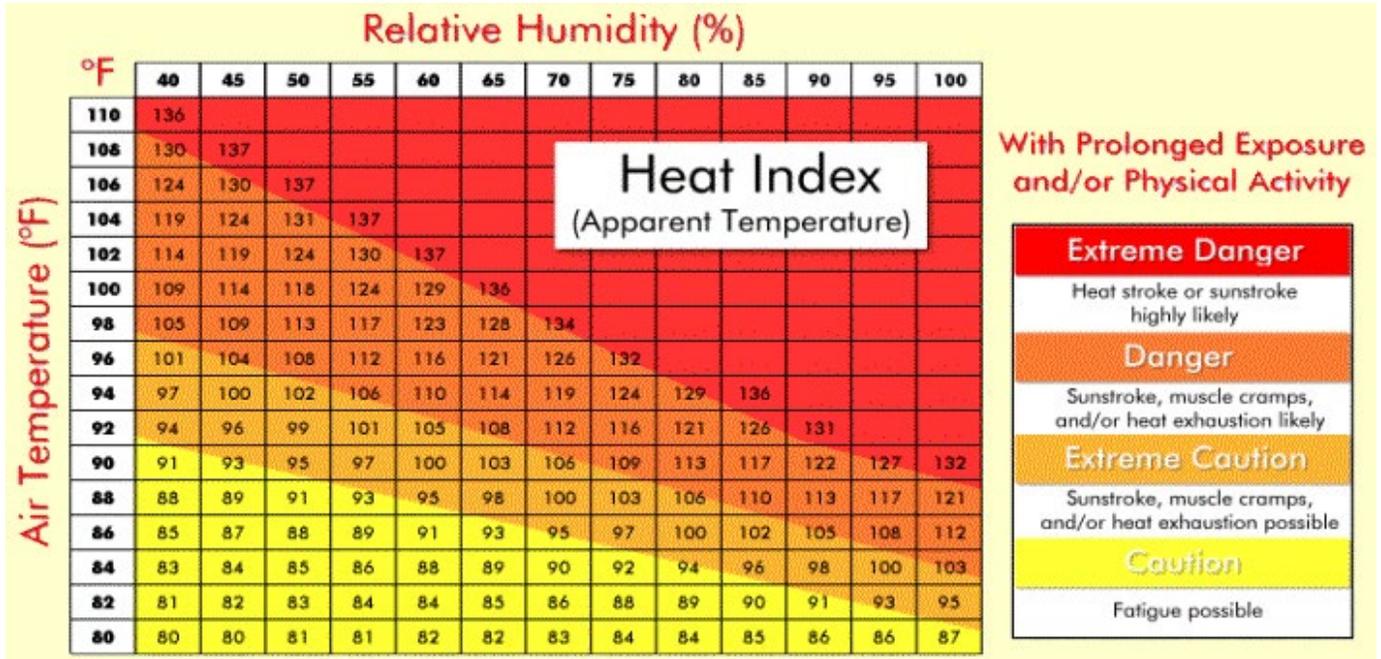

<b>JH&amp;SC Review:</b>	<b>Approved By:</b>	<b>Date Created:</b>	<b>Date of Last Review:</b>	<b>Rev. No.</b>
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Heat Stress

Safe Work Practice Number

SWP-003

HEAT EXHAUSTION	OR	HEAT STROKE
Faint or dizzy		Throbbing headache
Excessive sweating		No sweating
Cool, pale, clammy skin		Body temperature above 103° Red, hot, dry skin
Nausea or vomiting		Nausea or vomiting
Rapid, weak pulse		Rapid, strong pulse
Muscle cramps		May lose consciousness
<ul style="list-style-type: none"> <li>Get to a cooler, air conditioned place</li> <li>Drink water if fully conscious</li> <li>Take a cool shower or use cold compresses</li> </ul>		<p style="font-size: 24pt; font-weight: bold; color: white;">CALL 9-1-1</p> <ul style="list-style-type: none"> <li>Take immediate action to cool the person until help arrives</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Noise Exposure

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk – see FLHA form
Excessive sound levels	 <b>Hearing Protection</b>

DO	DO NOT
----	--------

<ul style="list-style-type: none"> <li>✓ Wear approved PPE as noted</li> <li>✓ A noise survey is to be conducted to identify high noise areas</li> <li>✓ For work performed at a client's location, observe posted noise signage and implement controls as needed.</li> <li>✓ Try and reduce or eliminated sound levels if possible               <ul style="list-style-type: none"> <li>○ engineering controls are to be used to reduce noise whenever practicable</li> <li>○ Perform work in a less noisy area if possible</li> <li>○ Limit exposure time in high decibel areas</li> </ul> </li> <li>✓ Hearing protectors are to be used where engineering controls are not practicable to ensure workers are not exposed to noise that exceeds 85 dBA over an 8 hour time period</li> <li>✓ Wear the appropriate type of hearing protection for the task you are performing (see chart below)</li> <li>✓ Clean your hands before inserting ear plugs</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not use headphones as hearing protection</li> <li>✗ Do not exceed the exposure limits listed below</li> </ul> <table border="1" style="width: 100%; margin-top: 10px;"> <thead> <tr> <th style="text-align: center;">3 dB(A) Exchange Rate</th> <th style="text-align: center;">Maximum Permitted</th> </tr> <tr> <th style="text-align: center;">Allowable Level dB(A)</th> <th style="text-align: center;">Daily Duration (hours)</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">85</td> <td style="text-align: center;">8</td> </tr> <tr> <td style="text-align: center;">88</td> <td style="text-align: center;">4</td> </tr> <tr> <td style="text-align: center;">91</td> <td style="text-align: center;">2</td> </tr> <tr> <td style="text-align: center;">94</td> <td style="text-align: center;">1</td> </tr> <tr> <td style="text-align: center;">97</td> <td style="text-align: center;">0.5</td> </tr> <tr> <td style="text-align: center;">100</td> <td style="text-align: center;">0.25</td> </tr> </tbody> </table>	3 dB(A) Exchange Rate	Maximum Permitted	Allowable Level dB(A)	Daily Duration (hours)	85	8	88	4	91	2	94	1	97	0.5	100	0.25
3 dB(A) Exchange Rate	Maximum Permitted																
Allowable Level dB(A)	Daily Duration (hours)																
85	8																
88	4																
91	2																
94	1																
97	0.5																
100	0.25																

- ✓ Double hearing protection may be required when the Noise Reduction Rating (NRR) of the hearing protection does not reduce the level of exposure below acceptable limits

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Ensure that manufacturer’s instructions are present and followed at all times
- <https://www.labour.gov.on.ca/english/hs/pubs/noise/>
- <https://www.ontario.ca/laws/regulation/150381>
- [https://www.ihsa.ca/rtf/health\\_safety\\_manual/pdfs/equipment/Hearing\\_Protection.pdf](https://www.ihsa.ca/rtf/health_safety_manual/pdfs/equipment/Hearing_Protection.pdf)
- PDI PPE Standard
- Customer Site Specific Rules and Procedures

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

	FOAM EARPLUGS	PREMOULDED EARPLUGS	EARMUFFS	FORMABLE EARPLUGS	CUSTOM-MOULDED EARPLUGS	SEMI-INSERT EARPLUGS
						
STYLE and COMFORT	Made of compressible plastic foam. Comes in many shapes. Often described as "disposable plugs." Elasticity lets them adapt easily to changes in ear canal.	Usually made of plastic or silicone rubber attached to a flexible stem for handling and insertion. Comes in many shapes and sizes to suit different ear canals.	Consists of two insulated plastic cups attached to metal or plastic band. Cups are equipped with soft cushions for seal and comfort. Headband tension ensures good seal.	Made from pliable material such as cotton/wax mixture, silicone putty, and mineral wool.	Custom made to fit a particular ear by taking an impression of the ear, making a mould, and casting a plug.	Commonly known as banded earplugs or canal caps. They consist of small caps or pods that are held in place over the ear canal by spring-loaded bands.
INTENDED USE	Most brands can be reused a few times before being discarded.	To be used more than once.	To be used regularly. Can be worn with or without plugs. Easily attached to hard hats.	<ul style="list-style-type: none"> <li>• Single-use for mineral wool products.</li> <li>• Multi-use for cotton/wax products.</li> <li>• Semi-permanent for silicone putty products.</li> </ul>	Permanent use	To be used more than once.
HYGIENE PRACTICES	Clean hands required each time fresh plugs are inserted.	Plugs should be cleaned regularly with warm soapy water, preferably after each removal from ear.	General maintenance required. Headband must be maintained. Cushions must be replaced when soiled or brittle.	Clean hands required for shaping and insertion.	Wash with hot water and soap, preferably after removal.	Wash with hot water and soap, preferably after removal.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Bugs and Insects

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk – see FLHA form	
Itchiness Irritation Allergic reactions Diseases, such as: <ul style="list-style-type: none"> <li>○ Malaria</li> <li>○ Lyme disease</li> <li>○ West Nile virus</li> <li>○ Zika virus</li> </ul> Note: In Canada, West Nile virus and Lyme disease are health concerns. However, for most Canadians, the risk of getting these illnesses and serious health effects is very low.*	 <b>Gloves*</b>	 <b>Safety Glasses*</b>
	 <b>Long Sleeves*</b>	 <b>Long Pants</b>
	 <b>Safety Footwear</b>	 <b>Hard Hat*</b>

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ Wear pants, socks, shoes and long sleeves, especially when venturing into heavy brush with likely bug infestations.               <ul style="list-style-type: none"> <li>○ Taping the cuffs of your pants or tucking them inside your socks or boots will provide extra protection against crawling insects like ticks.</li> </ul> </li> <li>✓ Wear light-coloured, loose clothes made of tightly woven materials such as nylon or polyester.</li> <li>✓ Be aware that:               <ul style="list-style-type: none"> <li>○ blackflies are active in daylight hours during springtime</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not use more than 30 percent of DEET on anyone.</li> <li>✗ Do not use repellent mixed with sunscreen. When you reapply sunscreen every two hours as advised, you may overexpose yourself to repellent.</li> <li>✗ Do not keep food and drink exposed outside for extended periods, as this may attract bugs and insects.</li> <li>✗ Do not attempt to remove nests or colonies on your own.</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Bugs and Insects

<ul style="list-style-type: none"> <li>○ ticks are often found along trail edges, mostly in wooded areas or tall grass</li> <li>○ mosquitoes can bite at any time of the day, and are more active at dawn and dusk</li> <li>✓ Use the correct repellent. <ul style="list-style-type: none"> <li>○ Insect repellents containing DEET can be used safely when applied as directed and in the right concentration, depending on age. For adults and children older than 12 years old the safe concentration limit is up to 30%</li> <li>○ Adults can wear permethrin-treated clothing, which works by repelling mosquitoes.</li> </ul> </li> <li>✓ Try repellents on a small patch of exposed skin before slathering all over.</li> <li>✓ Wash your hands after applying repellants.</li> <li>✓ Consult a physician if you are traveling out of the country or need to use bug repellent daily for prolonged periods.</li> <li>✓ Seek medical attention if you have a reaction to a bite or sting</li> </ul>	<ul style="list-style-type: none"> <li>✗ Don't use fragranced products such as scented laundry detergent or lotions as that can attract biting insects.</li> <li>✗ Don't apply insect repellent near the eyes or mouth</li> <li>✗ Do not use repellents on open wounds or skin that's irritated or sunburned.</li> <li>✗ Don't use products that don't protect well against biting insects. Certain products aren't recommended for protection against insect bites because they may not be very effective or long-lasting. These products include: <ul style="list-style-type: none"> <li>○ Citrosa houseplants</li> <li>○ Odour-baited mosquito traps</li> <li>○ Electronic or ultrasonic devices</li> <li>○ Electrocuting devices, like bug zappers</li> <li>○ Skin moisturizer or sunscreen combined with insect repellent</li> <li>○ Products that combine skin moisturizer and insect repellent are not approved in Canada</li> <li>○ Wristbands, neckbands and ankle bands that contain repellents</li> </ul> </li> </ul>
---	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Bugs and Insects

<ul style="list-style-type: none"> <li>✓ Check for ticks thoroughly after returning indoors and remove ticks properly.</li> <li>✓ Wash clothing and repellent-coated skin when you come indoors.</li> </ul>	
---	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Ontario Reg. 213/91: Construction Projects
- Ontario Regulation 1990, Reg. 851: Industrial Establishments
- \* Insect Repellants - [Health Canada](#)

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Vibration

Potential Hazards Present		Required Personal Protective Equipment * may be required based on risk – see FLHA form	
Hand-arm vibration	Vibrating objects such as power tools send vibration through the hands and arms	 <b>Gloves*</b>	 <b>Safety Glasses*</b>
		 <b>Safety* Footwear</b>	 <b>Hearing Protection*</b>
Whole-body vibration	Vibrating surfaces where a worker stands or sits send vibration throughout the body		 <b>Hard Hat*</b>

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ When the vibration hazard <b>cannot be removed or controlled adequately</b>, Personal Protective Equipment (PPE) such as anti-vibration gloves may be used</li> <li>✓ Use the appropriate gloves. Conventional protective gloves (e.g., cotton, leather), commonly used by workers, do not reduce the vibration that is transferred to workers' hands when they are using vibrating tools or equipment.</li> <li>✓ Use gloves and clothing to help maintain blood circulation during work in cold environments</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not use faulty tools</li> <li>✗ Do not work for extended continuous periods with vibrating tools.</li> <li>✗ Do not use excessive handgrip.               <ul style="list-style-type: none"> <li>• The type of grip and tightness used to hold a vibrating tool can affect user posture, and the forces applied against the hand, wrist and forearm. Excessive hand grip force increases ligament and tendon tension and reduces local blood circulation worsening the effects of vibration exposure</li> </ul> </li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Vibration

<ul style="list-style-type: none"> <li>✓ Use a minimum strength hand grip that still allows the safe operation of the tool or process.</li> <li>✓ Rest the tool on the work piece whenever practical.</li> <li>✓ Limit the time spent by workers on a vibrating surface.</li> <li>✓ Mechanically isolate the vibrating source or surface to reduce exposure.</li> <li>✓ Ensure that equipment is well maintained to avoid excessive vibration.</li> <li>✓ Install vibration damping seats, if applicable</li> <li>✓ Maintain tools properly. Tools that are worn, blunt or out of alignment will vibrate more.</li> <li>✓ Buy or use low vibration tools and equipment</li> <li>✓ Select the lowest vibration tool for the job use tools in ways that minimize vibration exposure</li> <li>✓ Consult a doctor at the first sign of vibration disease and ask about the possibility of changing to a job with less exposure.</li> </ul>	
--	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Occupational Health and Safety Act, R.S.O. 1990, c. O.1
- American Conference of Governmental Industrial Hygienists (ACGIH) has developed Threshold Limit Values (TLVs) for hand-arm vibration exposure.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Vibration

Safe Work Practice Number

SWP-006

- American Conference of Governmental Industrial Hygienists (ACGIH) has developed Threshold Limit Values (TLVs) for whole-body vibration exposure.
- Canadian Center for Occupational Health & Safety

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Propane

Safe Work Practice Number

SWP-007

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk – see FLHA form			
Flammable / explosive. Displacement of Breathable Air. Frostbite. Carbon Monoxide (from incomplete combustion).		<b>Gloves*</b>		<b>Safety Glasses*</b>
		<b>Safety* Footwear</b>		<b>Hard Hat*</b>

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ Use the information on safety data sheets, supplier specifications.</li> <li>✓ Ensure WHMIS and TDG labels are appropriately attached and visible.</li> <li>✓ Store compressed gas cylinders:               <ul style="list-style-type: none"> <li>• In a well-ventilated storage area where temperatures are below 52°C.</li> <li>• Upright and secured with a rope, wire or chain to prevent falling during transportation, usage or storage.</li> <li>• Separately, away from processing and handling areas, and from incompatible materials (do not store with oxidizing agents, oxygen or chlorine. Review the SDS); separate storage can minimize personal injury and damage in case of fires, spills or leaks.</li> <li>• In a storage area that is well labelled with the names of the gases stored, and signs indicating no smoking.</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not throw propane cylinders in the garbage. To dispose of your old cylinder, drop it off at a municipal transfer station or depot that accepts propane cylinders. Your propane supplier may also accept cylinders for disposal</li> <li>✗ Do not store cylinders inside buildings, or carried in closed canopies, vehicles or tool vans, following applicable legislation.</li> <li>✗ Do not use cylinders if shoulder label/stamp is not legible.</li> <li>✗ Do not store propane cylinders indoors, in a heated, enclosed or inhabited space.</li> <li>✗ Do not hoist propane cylinders by their cylinder valves or protective collars.</li> <li>✗ Do not attempt to deliver propane cylinders by carrying them up extension ladders.</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Propane

Safe Work Practice Number

SWP-007

- |  |   |
|--|---|
| <ul style="list-style-type: none"> <li>• So that full containers and empty containers are stored separately.</li> <li>✓ Inspect propane cylinders for damage prior to use or filling. Cylinders containing dents or gouges to their walls shall not be filled or used.</li> <li>✓ Inspect cylinder’s protective collar and foot ring for broken welds or corrosion.</li> <li>✓ Ensure that the cylinder valve outlet has a safety plug installed when not in use and that the cylinder safety relief valve is unobstructed.</li> <li>✓ Handle propane cylinders in an upright position secured to wheeled carts/dollies.</li> <li>✓ Avoid dropping, bumping or rolling cylinders on their sides.</li> <li>✓ A regulator must be installed on cylinder prior to use</li> <li>✓ Keep the area around propane cylinders clear and avoid placing materials or clothing on top of cylinders.</li> <li>✓ When not in use, a plug or cap must be used to seal the valve opening.</li> <li>✓ Place a charged ABC type fire extinguisher in the work area.</li> </ul> | <ul style="list-style-type: none"> <li>✗ Do not smoke or have open flame around or near stored propane cylinders.</li> <li>✗ Do not paint over a cylinder in any fashion.</li> <li>✗ Do not allow skin contact with liquid propane as it is extremely cold and can cause frostbite.</li> <li>✗ Do not heat tanks to increase flow – use a manifolded system instead.</li> </ul> |
|--|---|

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Propane

Safe Work Practice Number

SWP-007

<ul style="list-style-type: none"> <li>✓ Suppliers delivering the product or setting up the equipment must be trained in the safe handling of the material.</li> <li>✓ Nylon slings must be used in a “choker” fashion when loading, off-loading or lifting propane tanks.</li> <li>✓ “Lifting lugs” provided on tanks are not to be used. Slings are to be wrapped around the shell of the tank.</li> <li>✓ Tank valves and regulators are to be removed from the tank prior to moving.</li> <li>✓ All trucks, cranes or equipment used to handle propane tanks must be equipped with a fire extinguisher appropriate for the size and type of tank.</li> <li>✓ Except in an emergency, any movement or repositioning of tanks shall be performed by a competent worker.</li> <li>✓ Portable cylinders must be inspected and qualified every 10 years – it is against the law to fill an outdated cylinder.</li> </ul>	
---	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Ontario Reg. 213/91: Construction Projects
- Workplace Hazardous Material Information System (Reg. 860)
- SDS Propane
- Transportation of Dangerous Goods Act
- PDI Carbon Monoxide SWP

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Propane

Safe Work Practice Number

SWP-007

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Dust (General)

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk – see FLHA form			
<ul style="list-style-type: none"> <li>Dust may contain microscopic solids or liquid droplets that are small enough to get deep into the lungs and cause serious health problems</li> <li>Large particles may irritate the nose, throat and eyes.</li> </ul>		<b>Gloves*</b>		<b>Respiratory Protection</b>
		<b>Safety Footwear*</b>		<b>Eye Protection</b>

DO	DO NOT
<p>✓ Be aware of the health risks associated with exposure to specific high hazard materials / chemicals. Consult the Designated Substance Survey (DSS) available for most demolition projects and the corresponding Safety Data Sheet (SDS).</p> <p><b>Control the risk</b> You may need to use a range of controls to manage dust. They can include:</p> <p>Eliminate or reduce:</p> <ul style="list-style-type: none"> <li>✓ Look at ways to stop or reduce the amount of dust you make before work starts.</li> <li>✓ Design changes, using different materials, or using different tools or work methods can sometimes achieve the same result and create less dust.</li> </ul> <p>Control at source:</p> <ul style="list-style-type: none"> <li>✓ When elimination or reduction can't be done, it is important to stop the dust from getting into the air. Options include:</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not dry sweep, when possible.</li> <li>✗ Do not create unnecessary sources of ignition, including heat sources, friction, sparks and open flames.</li> <li>✗ Do not use a respirator, including disposable respirators, without being trained on the proper fit and use.</li> <li>✗ Do not use compressed air for cleaning dust off yourself or others</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Dust (General)

<ul style="list-style-type: none"> <li>• Water suppression and on-tool extraction. Water can be used to damp down dust, and on-tool extraction removes the dust as you create it.</li> </ul> <p>Respiratory protection:</p> <ul style="list-style-type: none"> <li>✓ Some tasks produce so much dust that water suppression or on-tool extraction is not enough. In these cases, face masks or other respiratory protective equipment should be used.</li> <li>✓ Like all personal protective equipment, respiratory protective equipment is the last line of protection and should always be used in combination with other controls.</li> </ul> <p>Other Controls:</p> <ul style="list-style-type: none"> <li>✓ In some situations, you may need to combine these controls with other measures like:             <ul style="list-style-type: none"> <li>• Keeping other people away from the work,</li> <li>• Stopping any dust from spreading with sheeting</li> <li>• Rotating workers and/or ventilating the work area.</li> </ul> </li> </ul>	
---	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- R.R.O. 1990, Regulation 833 (Control of Exposure to Biological or Chemical Agents) a
- Ontario Regulation 490/09 (Designated Substances)
- Ontario’s Occupational Health and Safety Act.
- SDS for materials you are working with.
- Project Specific Designated Substance survey (where available)

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Dust (General)

Safe Work Practice Number

SWP-008

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Chemical Spill

Potential Hazards Present	Required Safety Devices: * may be required based on risk – see FLHA form			
Exposure to chemicals  <b>Refer to the Safety Data Sheet (SDS) for specific hazards associated with the chemicals you work with or may be exposed to</b>		<b>Safety Footwear*</b>		<b>Respiratory Protection*</b>
		<b>Disposable coveralls*</b>		<b>Hard Hats*</b>
		<b>Safety glasses*</b>		<b>Gloves*</b>

## Required Materials & Equipment

- Spill kits
- In the case of large spills, spill kit inventory and off-site materials can be called upon. Other materials available for spill response from outside and on-site sub-contractors include:
  - Shovels
  - Vacuum trucks
  - Booms
  - Excavators
  - Bags of absorbent
  - Loaders
- In the event of large spills will call on the resources of commercial spill clean-up companies, and local fire response teams.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Chemical Spill

**Procedure**

<p><b>Before You Start</b></p>	<ul style="list-style-type: none"> <li>• EVALUATE ways to minimize potential spills in the storage area, when transported in the workplace, during transfers to other containers, and during use.</li> <li>• PROTECT containers and pipes from damage.</li> <li>• INSPECT containers and pipes regularly for leaks, corrosion or signs of degradation.</li> <li>• USE spill trays and secondary containment where leaks may occur.</li> <li>• BE AWARE of any instability or incompatibility, which may lead a container to break or overflow.</li> <li>• USE only as much of the material as you need at a time.</li> <li>• USE pumps or other mechanical devices instead of pouring directly into a container.</li> <li>• BOND and GROUND containers of flammable liquids.</li> <li>• CLOSE containers after using them.</li> <li>• DISPOSE of chemicals if no longer needed.</li> <li>• MAINTAIN good housekeeping and minimize clutter.</li> <li>• There is always a chance that a spill or leak can happen when chemicals are used in the workplace. The Accidental Release Measures section of the Material Safety Data Sheet (SDS) provides general guidance on the actions to take in case of a spill or leak.</li> </ul>
--------------------------------	---

<p><b>During Your Work</b></p>	<p><b><u>STANDARD PROCEDURE FOR ANY SPILL</u></b></p>
--------------------------------	---

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1




# Chemical Spill

	<p><b>Safety of Personnel</b></p> <ul style="list-style-type: none"> <li>• Consider the safety of all persons first.</li> <li>• If any personnel have been affected or injured by a spill, medical attention should be rendered as soon as possible.</li> </ul> <p><b>Identification of Spill</b></p> <ul style="list-style-type: none"> <li>• All employees must inform the Supervisor at once, of a spill.</li> <li>• If the employee can safely stop the spill at the source, this should be done.</li> <li>• The Supervisor will investigate and confirm the spill. The supervisor will: <ul style="list-style-type: none"> <li>○ Determine the source, if possible;</li> <li>○ Assess the size and nature of the spilled material (oil, chemicals);</li> <li>○ Mobilize a response team to take immediate action to stop or reduce the spill and contain it, without endangering the health and safety of the workers or local population;</li> <li>○ Take action to reduce hazards to persons working near the spill;</li> <li>○ Contact the appropriate regulatory agencies where necessary.</li> </ul> </li> <li>• The Supervisor will assume the role of Response Coordinator for most minor spill incidents unless relieved as below.</li> <li>• The Project Manager or designate should be called to assume the role of Response Coordinator if the spill is considered major, such as: <ul style="list-style-type: none"> <li>○ A bulk oil tank rupture;</li> <li>○ A fuel pipeline rupture;</li> <li>○ A release of oil or chemical outside of the property;</li> <li>○ A spill to the storm water drainage system</li> </ul> </li> </ul>
--	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Chemical Spill



- It requires additional resources such as mobilizing equipment contractors for response.

**Response**

- Take any actions necessary to prevent the spill from contaminating groundwater or offsite surface water (e.g. clean-up using an absorbent material mixed with sand).
- If the spill has the potential to leave the site then the Project Manager or designate must contact the Ministry of the Environment Spills Action Centre immediately and keep close contact with the Ministry of the Environment while the response is underway.
- Actions for the different spill types are documented as follows


**Documentation**

- The Supervisor involved in the spill discovery will complete an Incident and Accident report as soon as possible and submit electronically.
- A daily log will be maintained of the spill cleanup activities.
- A full report of the incident shall be completed by the Project Manager or designate, using the online reporting system. The report should include the following information:
  - The date and time of spill;
  - The name of the personnel involved in initial response;
  - Location of incident;
  - The substances involved (estimated quantity);
  - Actions taken to respond (containment, cleanup);

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Chemical Spill




- Government and agency personnel contacted;
  - Media involvement (if any);
  - Evaluation of response effectiveness;
  - Description of ongoing requirements (remediation of soils, monitoring. etc);
  - Identification of cause;
  - Recommendations for prevention of future incidents; and
  - Other relevant information.
- RESPONSE TO OIL SPILLS ON LAND**
- Consider the safety of all persons first.
  - The oil should be prevented from escaping to storm water drains;
  - Collect the oil or soak up material using absorbent material.
  - Once the spill cleanup is completed, place the used absorbent pads or contaminated materials into drums for appropriate disposal.
  - Oil soaked sand or soil will be removed where necessary.
- Larger Quantity spills:**
- Obtain plastic tarp(s), absorbent sheeting, or other ultra-dry absorbent and any other necessary spill containment equipment, hoses, etc.
  - A berm of soil should be constructed down-slope from the seepage or spill.
  - Provide containment of spill at outfall locations and storm drain outlets.
  - A tarp can be placed in such a way that the fuel can pool for collection and removal (such as at the foot of a berm).

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Chemical Spill



- If there is a large volume of spilled product, pump the oil into spare empty drums and store in a secure area for appropriate disposal.
  - Absorbent sheeting or sand can also be used to soak up spilled oil.
  - Contaminated soils should be excavated and replaced with clean fill where required
  - Once the spill cleanup is completed, place the used absorbent pads or contaminated materials into the drums for disposal. Disposal will be in accordance with regulatory requirements.
- RESPONSE TO CHEMICAL SPILLS**
- Consider the safety of all persons first.
  - If any personnel becomes affected or injured by the spill during response, medical attention should be rendered as soon as possible.
  - Notify the supervisor immediately.
  - Determine chemical released.
  - Refer to the Accidental Release Measures section of the Material Safety Data Sheet (SDS) for general guidance on the actions to take in case of a spill or leak for the specific product.
  - Assemble the necessary safety equipment before attempting to contain the spill, (such as latex or other protective gloves, goggles or safety glasses, masks or breathers, etc.).
  - Apply absorbents to soak up liquids (refer to SDS for appropriate type).
  - Place plastic sheeting over solid chemicals, such as dusts and powders, to prevent them from spreading by wind and to prevent attraction by birds or other mammals.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Chemical Spill

	<ul style="list-style-type: none"> <li>• Neutralize acids or caustics (refer to SDS sheet). Place spilled material and contaminated cleanup supplies in an empty refuse drum and label and seal drums for appropriate disposal.</li> <li>• The disposal containers must be transferred to a secure storage area for future disposal. Disposal will be completed in accordance with the applicable regulatory requirements.</li> </ul> <p><b><u>RESPONSE TO GASEOUS RELEASES</u></b></p> <p>For most gaseous releases there is no ability to capture the release and hence the response is to shut off the source and rely on dispersion. As these releases can affect persons on neighboring properties, it is important to observe wind direction and conditions to assess areas of potential impact</p> <ul style="list-style-type: none"> <li>• Consider the safety of all persons first.</li> <li>• The supervisor should be notified immediately.</li> <li>• Assess the hazard of the released material by referring to the Manufacturers Safety Data Sheets (MSDS) where possible.</li> <li>• Attempt to shut off the source if it is safe to do so.</li> <li>• Determine if there are safety issues affecting on site and off-site and take action.</li> <li>• If it is a natural gas leak contact the Ministry of the Environment Spills Action Centre, the appropriate utility and the municipality.</li> </ul>
--	--

<b>After You Finish</b>	<p><b>NOTIFICATION</b></p> <ul style="list-style-type: none"> <li>• All external communications to government agencies or the media shall go through the VP of Operations or designate.</li> </ul>
-------------------------	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Procedure

# Chemical Spill

Safe Work Procedure Number

SWP-009

	<ul style="list-style-type: none"> <li>• Employees must refrain from making statements about the incident to the media (such as newspaper, radio, television) and refer these enquiries to the VP of operations or designate.</li> <li>• Employees must refer any enquiries from regulatory personnel to the VP of operations or designate.</li> <li>• All reporting shall be in accordance with the job specific environmental plan.</li> </ul>
--	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Ontario Occupational Health and Safety Act
- Ontario Reg. 213/91 Construction Projects
- Federal Transportation of Dangerous Goods Act and Associated Regulation
- Ontario Environmental Protection Act
- ONTARIO REGULATION 224/07
- PDI: Standard #1 Incident and Accident Reporting, #12 WHMIS

This Safe Work Procedure must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Asbestos - General

Potential Hazards Present	Required Safety Devices Required: * may be required based on risk – see FLHA form			
Mesothelioma Lung cancer Asbestosis		<b>Protective Clothing*</b>		<b>Hard Hat</b>
		<b>Hand Protection*</b>		<b>Respirator*</b>
		<b>Safety Eyewear</b>		<b>Safety Boots</b>

DO	DO NOT																																																								
<p>Asbestos can be found in any industrial or residential building built or refurbished before the year 2000. It is in many of the common materials that you may come across during your work including:</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <caption><b>TABLE 1 — ASBESTOS PRODUCTS IN CONSTRUCTION</b></caption> <thead> <tr> <th style="width: 30%;">Product</th> <th style="width: 15%;">Residential</th> <th style="width: 15%;">Commercial/ Institutional</th> <th style="width: 15%;">Industrial</th> </tr> </thead> <tbody> <tr> <td>Sprayed-On Fireproofing</td> <td></td> <td>XX*</td> <td></td> </tr> <tr> <td>Pipe and Boiler Insulation</td> <td>X</td> <td>X</td> <td>XX</td> </tr> <tr> <td>Loose Fill Insulation</td> <td>X**</td> <td></td> <td>X</td> </tr> <tr> <td>Vermiculite Insulation</td> <td>X**</td> <td></td> <td></td> </tr> <tr> <td>Asbestos Cement Products</td> <td>X</td> <td>X</td> <td>X</td> </tr> <tr> <td>Acoustical Plaster</td> <td>X</td> <td>X</td> <td></td> </tr> <tr> <td>Acoustical Tiles</td> <td>X</td> <td>XX</td> <td></td> </tr> <tr> <td>Vinyl Asbestos Tiles</td> <td>X</td> <td>X</td> <td></td> </tr> <tr> <td>Gaskets</td> <td></td> <td>X</td> <td>XX</td> </tr> <tr> <td>Roofing Felts</td> <td>X</td> <td>X</td> <td>X</td> </tr> <tr> <td>Asphalt/Asbestos Limpet Spray</td> <td></td> <td></td> <td>X</td> </tr> <tr> <td>Drywall Joint-Filling Compound</td> <td>X</td> <td>X</td> <td></td> </tr> <tr> <td>Coatings and Mastics</td> <td>X</td> <td>X</td> <td>X</td> </tr> </tbody> </table> <p><small>*Denotes extensive use. **Vermiculite insulation. XX – May contain vermiculite.</small></p>	Product	Residential	Commercial/ Institutional	Industrial	Sprayed-On Fireproofing		XX*		Pipe and Boiler Insulation	X	X	XX	Loose Fill Insulation	X**		X	Vermiculite Insulation	X**			Asbestos Cement Products	X	X	X	Acoustical Plaster	X	X		Acoustical Tiles	X	XX		Vinyl Asbestos Tiles	X	X		Gaskets		X	XX	Roofing Felts	X	X	X	Asphalt/Asbestos Limpet Spray			X	Drywall Joint-Filling Compound	X	X		Coatings and Mastics	X	X	X	<p>* Do not disturb ACM (Asbestos containing Materials) or PACM (presumed asbestos containing materials), unless you are trained, and all applicable safe work procedures have been followed.</p>
Product	Residential	Commercial/ Institutional	Industrial																																																						
Sprayed-On Fireproofing		XX*																																																							
Pipe and Boiler Insulation	X	X	XX																																																						
Loose Fill Insulation	X**		X																																																						
Vermiculite Insulation	X**																																																								
Asbestos Cement Products	X	X	X																																																						
Acoustical Plaster	X	X																																																							
Acoustical Tiles	X	XX																																																							
Vinyl Asbestos Tiles	X	X																																																							
Gaskets		X	XX																																																						
Roofing Felts	X	X	X																																																						
Asphalt/Asbestos Limpet Spray			X																																																						
Drywall Joint-Filling Compound	X	X																																																							
Coatings and Mastics	X	X	X																																																						

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# Asbestos - General

<ul style="list-style-type: none"> <li>✓ For any demolition, alteration, or repair projects the owner must complete a report indicating whether any material that is likely to be handled, dealt with, disturbed, or removed is: <ul style="list-style-type: none"> <li>○ friable or non-friable asbestos-containing material (ACM) OR</li> <li>○ to be treated as ACM, and, in the case of sprayed-on friable material, treated as though it contained a type of asbestos other than chrysotile.</li> <li>○ The report (including drawings, plans, and specifications as appropriate) must show the location of the ACM and must be provided to all contractors bidding on the job and must be reviewed before contract arrangements are finalized.</li> </ul> </li>   <li>✓ Workers who may do work that involves ACM or carry out work in close proximity to ACM must be informed of the hazard, and take the company asbestos awareness training. Which addresses: <ul style="list-style-type: none"> <li>○ The hazards of asbestos exposure</li> <li>○ The purpose, inspection, maintenance, use, fitting, cleaning, disinfecting, and limitations of respirators</li> <li>○ Personal hygiene and correct procedures for work with asbestos</li> <li>○ How to use, clean, and dispose of protective clothing.</li> </ul> </li>   <li>✓ The Ministry of Labour uses the following to categorize asbestos-related activity into one of three types: <ul style="list-style-type: none"> <li>○ Type 1,</li> <li>○ Type 2,</li> <li>○ or Type 3.</li> </ul> </li> </ul>	
---	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# Asbestos - General

<p>Think of Types 1, 2, and 3 as describing low, medium, and high-risk work.</p> <ul style="list-style-type: none"> <li>✓ Anybody who works in a Type 1, Type 2, or Type 3 asbestos operation must be trained on the following:</li> <li>✓ As of November 1, 2007, workers and supervisors must be certified before they can do Type-3 asbestos work or supervise Type-3 work. There are two asbestos abatement certification programs: <ul style="list-style-type: none"> <li>○ one for workers (Asbestos Abatement Worker)</li> <li>○ one for supervisors (Asbestos Abatement Supervisor).</li> </ul> </li> <li>✓ Respiratory protective equipment must be worn when the airborne concentration of asbestos cannot be reduced below its occupational exposure limit</li> <li>✓ Workers who may be exposed to asbestos dust during abatement activities must wear protective clothing</li> <li>✓ Asbestos waste and dust resulting from abatement activities are cleaned away promptly</li> </ul>	
--	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Ontario Regulation 278/05 (*Designated Substance—Asbestos on Construction Projects and in Buildings and Repair Operations*)
- *Occupational Health and Safety Act (OHSA)*
- Construction Regulation (Ontario Regulation 213/91)
- WHMIS (Workplace Hazardous Materials Information System)
- PDI Standard 03 - Personal Protective Equipment

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Asbestos - General

Safe Work Practice Number

SWP-010

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# Type 1 Asbestos Operations

Potential Hazards Present	Required Safety Devices Required: * may be required based on risk – see FLHA form			
Exposure to asbestos fibers <ul style="list-style-type: none"> <li>• Mesothelioma</li> <li>• Asbestosis</li> </ul>		<b>Protective Clothing*</b>		<b>Hard Hat</b>
		<b>Hand Protection*</b>		<b>Respirator*</b>
		<b>Safety Eyewear</b>		<b>Safety Boots</b>

DO	DO NOT
<p>Type 1 operations include:</p> <ul style="list-style-type: none"> <li>• Installing or removing less than 7.5 square meters of ceiling tile containing asbestos , without it being broken, cut, drilled, abraded, ground, sanded or vibrated</li> <li>• Installing or removing non-friable asbestos containing material, other than ceiling tiles without it being broken, cut, drilled, abraded, ground, sand or vibrated\</li> <li>• Breaking, cutting, drilling, abrading or vibrating non-friable asbestos material containing material if                             <ul style="list-style-type: none"> <li>a) you wet the material <b>AND</b></li> <li>b) you use only non-powered hand held tools</li> </ul> </li> <li>• Removing less than one square meter of drywall where asbestos joint filling compound was used</li> </ul> <p>✓ Anybody who works in a Type 1, Type 2, or</p>	<ul style="list-style-type: none"> <li>✘ Do not disturb ACM or PACM (presumed asbestos containing materials), unless you are trained, and all applicable safe work procedures have been followed.</li> <li>✘ Do not eat, drink, smoke or chew gum</li> <li>✘ Do not use compressed air to clean asbestos dust off surfaces. This just blows the fibres into the air.</li> <li>✘ Do not reuse drop sheets.</li> </ul>



# Type 1 Asbestos Operations

<p>Type 3 asbestos operation must be trained by a competent person on the following:</p> <ul style="list-style-type: none"> <li>○ the hazards of asbestos exposure</li> <li>○ the purpose, inspection, maintenance, use, fitting, cleaning, disinfecting, and limitations of respirators</li> <li>○ personal hygiene and correct procedures for work with asbestos</li> <li>○ how to use, clean, and dispose of protective clothing.</li> </ul> <p>✓ If a worker requests a respirator and protective clothing, they must be provided.</p> <ul style="list-style-type: none"> <li>○ The respirators must be the Air-purifying half mask respirator with N-100, R-100, or P-100 particulate filter.</li> <li>○ Protective clothing must be impervious to asbestos fibers.</li> </ul> <p>✓ The worker must wear the respirator / protective clothing if he or she requests it from the employer.</p> <p>✓ Before beginning work, visible dust must be removed by wiping with a damp cloth or by vacuuming with a special HEPA*-filtered vacuum.</p> <p>✓ All asbestos dust and waste must be cleaned up regularly and frequently (before it dries out) using a HEPA vacuum or by damp mopping or wet-sweeping.</p> <p>✓ When you wish to cut, shape, or drill the non-friable materials you must wet the work (water plus wetting agent) and use only hand</p>	
--	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# Type 1 Asbestos Operations

tools such as nibblers, rasps, files, shears, knives, hand drills, or handsaws. Using hand tools may create some dust, but wetting the material will prevent the dust particles from becoming airborne.

- ✓ You must use a drop sheet (typically 6-mil polyethylene) below the work area to help control dust.
- ✓ Before leaving the work area, workers must damp-wipe or HEPA-vacuum their protective clothing to remove any surface contamination. Workers must damp-wipe their respirators before taking them off.
- ✓ Asbestos waste and disposable coveralls must be placed in dust-tight containers and labeled with warning signs
- ✓ After the work is done, drop sheets must be wetted or *Vacuum with HEPA filter* damp-wiped and then folded so that any residual dust or scrap is contained inside the folds.
- ✓ Dispose of drops sheets as Asbestos waste.
- ✓ Barriers and portable enclosures that are rigid and will be reused must be cleaned by damp-wiping or HEPA-vacuuming.
- ✓ Containers must be cleaned by damp wiping or HEPA-vacuuming before being removed from the work area.
- ✓ You must dispose of waste at a landfill site that will accept asbestos

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# Type 1 Asbestos Operations

<ul style="list-style-type: none"> <li>✓ A washbasin, soap, water, and towels—or a similarly equipped clean-up facility—must be provided for workers so that they can wash their hands and faces upon leaving the work area.</li>   <li>✓ Workers must wash before eating, drinking, smoking, or any such activities.</li> </ul>	
--	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Ontario Regulation 278/05 (*Designated Substance—Asbestos on Construction Projects and in Buildings and Repair Operations*)
- *Occupational Health and Safety Act* (OHSA)
- Construction Regulation (Ontario Regulation 213/91)
- WHMIS (Workplace Hazardous Materials Information System)
- PDI Standard 03 - Personal Protective Equipment

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# Type 2 Asbestos Operations

Potential Hazards Present	Required Safety Devices Required: * may be required based on risk – see FLHA form			
Mesothelioma Lung cancer Asbestosis Heat stress Slips trips and falls		Protective Clothing		Hard Hat
		Hand Protection*		Respirator
		Safety Eyewear		Safety Boots

DO	DO NOT
<p>Type 2 operations include:</p> <ul style="list-style-type: none"> <li>• Removing all or part of a false ceiling in buildings containing sprayed asbestos fireproofing if it is likely that asbestos fibers are resting on top of the ceiling. This is likely when fireproofing is deteriorating or damaged.</li> <li>• Removing or disturbing less than 1 square meter of friable asbestos materials—for example, repairing an insulated pipe joint or removing some fireproofing to fasten a new pipe hanger.</li> <li>• Enclosing friable asbestos insulation to prevent further damage or deterioration.</li> <li>• Applying tape, sealant, or other covering (by means other than spraying) to pipe or boiler insulation.</li> <li>• Installing or removing more than 7.5 square metres of ceiling tile containing asbestos,</li> </ul>	<ul style="list-style-type: none"> <li>✘ Do not disturb ACM or PACM (presumed asbestos containing materials), unless you are trained, and all applicable safe work procedures have been followed.</li> <li>✘ Do not eat, drink, smoke, or chew gum in the work area.</li> <li>✘ Do not use compressed air to remove asbestos dust from a surface.</li> <li>✘ Do not reuse dropsheets.</li> <li>✘ Barriers and portable enclosures must not be reused unless they are rigid and can be cleaned.</li> </ul>



# Type 2 Asbestos Operations

without it being broken, cut, drilled, abraded, ground, sanded, or vibrated.

- Breaking, cutting, drilling, abrading, grinding, sanding, or vibrating non-friable asbestos-containing material if the material is not wetted and the work is done only with non-powered hand-held tools.
  - Removing one square metre or more of drywall where the joint-filling compound contains asbestos.
  - Working on non-friable asbestos with power tools that are attached to dust collecting devices equipped with HEPA filters. If you need to power-grind or machine the asbestos product and your tools are not equipped with HEPA-filtered dust collectors
  - Using a glove bag to remove asbestos containing insulation.
  - Cleaning or removing filters used in air handling equipment in a building with sprayed asbestos fireproofing.
  - Any other operation that is not Type 1 or Type 3, but one that may cause exposure to asbestos.
- ✓ You must notify the Ministry of Labour (MOL), orally and in writing, before beginning a Type 2 operation in which one square metre or more of insulation is to be removed using a glove bag.
- ✓ The written notice must include
- the name and address of the person giving the notice the name and address of the owner of the place where the work will be done
  - the exact address and location where the work will be done

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# Type 2 Asbestos Operations

<ul style="list-style-type: none"> <li>• a description of the work that will be done</li> <li>• the starting date and expected duration of the work the name and address of the supervisor in charge of the work</li> </ul> <p>✓ Anybody who works in a Type 2 asbestos operation must be trained by a competent person on the following:</p> <ul style="list-style-type: none"> <li>• the hazards of asbestos exposure</li> <li>• the purpose, inspection, maintenance, use, fitting, cleaning, disinfecting, and limitations of respirators</li> <li>• personal hygiene and correct procedures for work with asbestos</li> <li>• how to use, clean, and dispose of protective clothing.</li> </ul> <p>✓ Workers involved in Type 2 operations must wear a NIOSH-approved respirator as identified in the respirator chart at the end of this document</p> <p>✓ Workers must wear protective clothing impervious to asbestos with tight-fitting cuffs at the wrists, ankles, and neck, as well as a hood or head cover.</p> <ul style="list-style-type: none"> <li>• Torn or damaged clothing must be repaired or replaced.</li> <li>• Use laceless, pull-on rubber boots. They can be washed off later or disposed of as contaminated waste.</li> </ul> <p>✓ Only those workers wearing the required respirators and protective clothing are permitted in the work area.</p>	
--	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# Type 2 Asbestos Operations

<ul style="list-style-type: none"> <li>✓ You must wet asbestos-containing material before you remove it to lessen the chance of creating dust—unless wetting would cause a hazard or damage. <ul style="list-style-type: none"> <li>• You must add a wetting agent to the water.</li> </ul> </li> <li>✓ Any dust on exposed surfaces must be cleaned by damp-wiping or HEPA vacuuming before starting work which may disturb the dust.</li> <li>✓ Warning signs are required for all Type 2 activities.</li> <li>✓ For ceiling removal (to gain access to a work area) and for removal of less than 1 square metre of friable asbestos-containing material indoors, an enclosure must be erected around the area to prevent the spread of asbestos dust. <ul style="list-style-type: none"> <li>• If your enclosure is opaque it must have a transparent window to allow observation of the work.</li> <li>• The ventilation system must be disabled and sealed off if the inlets or exhausts are within the enclosed area.</li> </ul> </li> <li>✓ For other Type 2 operations, 6-mil polyethylene dropsheets should be adequate.</li> <li>✓ You must put waste asbestos, disposable clothing, the enclosure and barrier materials (such as polyethylene sheeting), and any other contaminated items into dust-tight containers labeled with warning signs.</li> </ul>	
--	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# Type 2 Asbestos Operations

<ul style="list-style-type: none"> <li>✓ The containers must be damp-wiped or HEPA-vacuumed to remove any surface contamination before you take the containers out of the work area.</li> <li>✓ Any dust or waste must be cleaned up by damp-wiping or HEPA-vacuuming before it can dry out and pose a hazard.</li> <li>✓ Dropsheets and enclosures must be decontaminated and wetted before disposal.</li> <li>✓ After the work is completed, barriers and portable enclosures that are rigid and that will be reused must be cleaned by damp wiping or HEPA-vacuuming.</li> <li>✓ Before leaving the work area, workers must damp-wipe or HEPA-vacuum their protective clothing to remove any surface contamination.</li> <li>✓ Workers must damp-wipe their respirators before taking them off.</li> <li>✓ A washbasin, water, soap, and towels must be provided for workers to wash their hands and faces before leaving the work area.</li> <li>✓ Workers must also wash before eating, drinking, smoking, or any such activities.</li> </ul> <p><b>Glove-Bag Operations</b> All the procedures that apply to Type 2 operations also apply to glove bag operations. In addition, you must do the following.</p>	
--	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# Type 2 Asbestos Operations

<ul style="list-style-type: none"> <li>✓ Separate the work area from the rest of the workplace by walls, barricades, fencing, or other suitable means.</li> <li>✓ Disable the mechanical ventilation system serving the work area and seal all openings or voids, including ventilation ducts and windows to and from the work area.</li> <li>✓ Place polyethylene dropsheets below the work area.</li> <li>✓ The glove bag must be strong and large enough to hold the material you're removing.</li> <li>✓ You must not use a glove bag if you can't make a proper seal because of the condition of the insulation, the temperature of the surface, or the type of jacketing.</li> <li>✓ Check the glove bag for damage or defects.</li> <li>✓ Be careful not to puncture the glove bag.</li> <li>✓ When you've finished removing the asbestos: <ul style="list-style-type: none"> <li>• damp-wipe and HEPA-vacuum the tools</li> <li>• wet down the inside walls of the glove bag</li> <li>• thoroughly wet the material inside the glove bag</li> <li>• wipe down the pipe (or whatever the asbestos was removed from) and seal it with a suitable encapsulate</li> <li>• evacuate air from the bag using a HEPA-vacuum and place the glove bag, with the waste inside, in a suitable dust-tight container</li> <li>• clean up the work area by damp-wiping or HEPA-vacuuming.</li> </ul> </li> </ul>	
---	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Ontario Regulation 278/05 (*Designated Substance—Asbestos on Construction Projects and in Buildings and Repair Operations*)
- *Occupational Health and Safety Act (OHSA)*

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# Type 2 Asbestos Operations

- Construction Regulation (Ontario Regulation 213/91)
- WHMIS (Workplace Hazardous Materials Information System)
- PDI Standard 03 - Personal Protective Equipment

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

## RESPIRATOR CHART FOR ASBESTOS WORK

“ACM” means asbestos-containing material.

Description of work	Required respirator
<b>Type 2 operations</b>	
Removing all or part of a false ceiling to obtain access to a work area, if ACM is likely to be lying on the surface of the false ceiling.	<b>B</b>
Breaking, cutting, drilling, abrading, grinding, sanding, or vibrating non-friable ACM if the work is done by means of power tools that are attached to dust-collecting devices equipped with HEPA filters.	Material is not wetted style="text-align: center;"> <b>B</b>
	Material is wetted to control fibres style="text-align: center;"> <b>A</b>
All other Type 2 operations*	<b>A</b>

## KEY TO RESPIRATOR CHART


A	B	C	D
Air-purifying half-mask respirator with N-100, R-100, or P-100 particulate filter. If the worker requests the respirator from the employer, then the worker must wear it.	Choose any of the following: <ul style="list-style-type: none"> <li>➤ Air-purifying full-facepiece respirator with N-100, R-100, or P-100 particulate filter.</li> <li>➤ Powered air-purifying respirator with a tight-fitting facepiece (either full or half facepiece) and a high-efficiency filter.</li> <li>➤ Negative-pressure (demand) supplied-air respirator with a full facepiece.</li> <li>➤ Continuous-flow supplied-air respirator with a tight-fitting facepiece (full or half facepiece).</li> </ul>	Pressure-demand supplied-air respirator with a half facepiece.	Pressure-demand supplied-air respirator with a full facepiece.

Disposable respirators or dust masks are not recommended for avoiding exposure to asbestos fibres because it's difficult to perform negative-pressure and positive-pressure seal checks.


JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# Type 2 Asbestos Operations

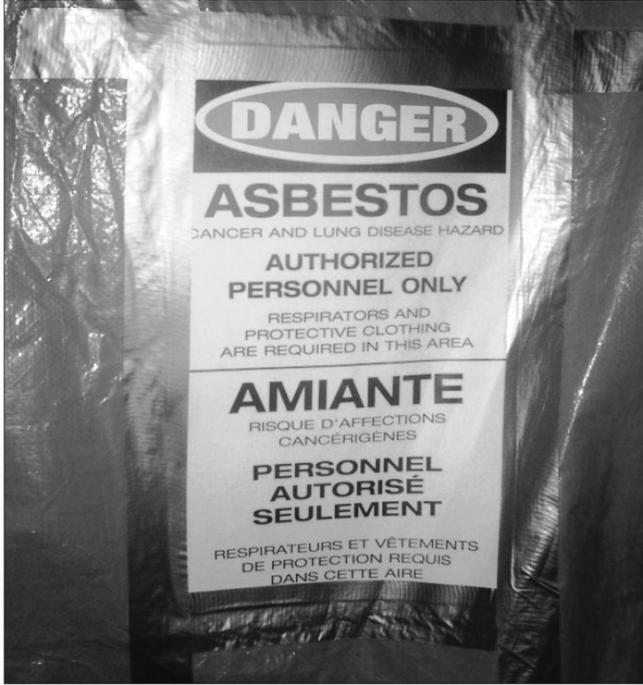

*Warning sign*

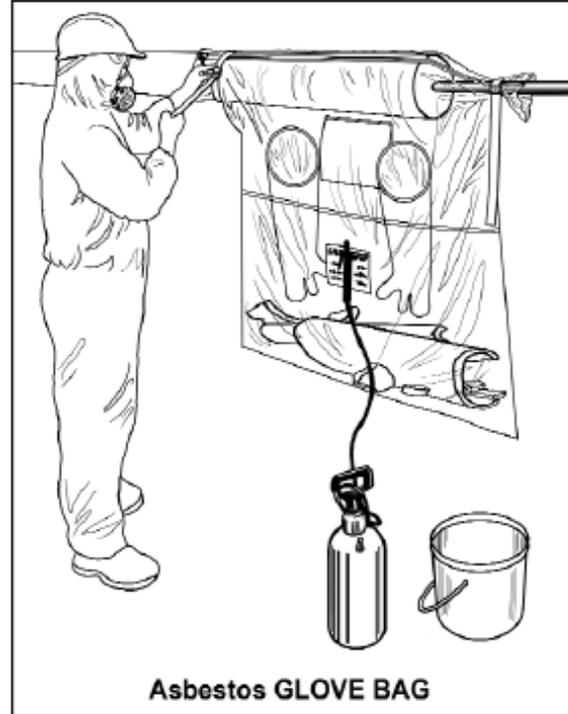


**Asbestos GLOVE BAG**

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# Type 2 Asbestos Operations

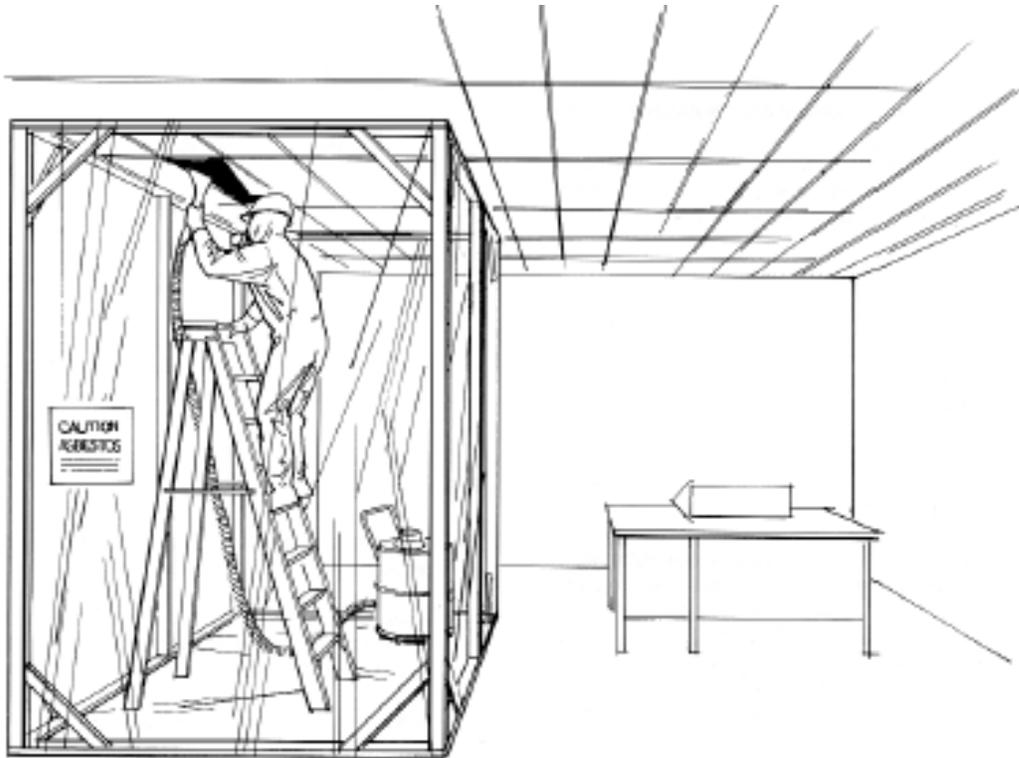

**TYPE 2 ENCLOSURE FOR CEILING WORK**

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# Type 3 Asbestos Operations

Potential Hazards Present	Required Safety Devices: * may be required based on risk – see FLHA form	
Inhalation of asbestos fibers <ul style="list-style-type: none"> <li>cancer</li> <li>asbestosis</li> </ul> Heat Stress Cold Stress Falls from Ladders / scaffold Slips / trips Electrical hazards from cords / panels	 <b>Safety Boots</b>	 <b>Respiratory Protection</b>
	 <b>Disposable coveralls</b>	 <b>Hard Hats</b>
	 <b>Safety glasses</b>	 <b>Gloves</b>

## Required Materials & Equipment

- Rip proof poly sheeting
- 2" or 3" tape
- Spray glue
- Lumber for construction of temporary walls and decontamination units
- Temporary lights
- Heavy duty clear bags
- Labelled heavy duty disposal bags
- Portable shower with water heater
- High Efficiency Particulate Air (HEPA) negative air unit
- HEPA vacuum
- Water amending agent
- GFCI for electrical circuits
- Emergency response plan

## Procedure

<b>Before You Start</b>	<ol style="list-style-type: none"> <li>1. Review the owner's designated substance survey (DSS) to determine what Asbestos containing materials (ACM) are present and identify the location(s).</li>   <li>3. Evaluate what activities are required and what work methods will be employed in order to determine what precautions are required for the operation being conducted (type III criteria and the criteria for Outdoor operations in Ontario is located in the appendices of this procedure_</li> </ol>
-------------------------	--

<b>JH&amp;SC Review:</b>	<b>Approved By:</b>	<b>Date Created:</b>	<b>Date of Last Review:</b>	<b>Rev. No.</b>
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# Type 3 Asbestos Operations

	<p>4. Type 3 operations include:</p> <ul style="list-style-type: none"> <li>• Removing or disturbing more than 1 square meter of friable asbestos-containing material</li> <li>• Spraying a sealant onto friable asbestos material</li> <li>• Cleaning or removing air handling equipment in buildings with sprayed asbestosis fire proofing</li> <li>• Repair alteration, or demolition of Kilns, metallurgical furnaces and other installations with asbestos refractory materials</li> </ul> <p>5. In Ontario, you must notify the Ministry of Labour of all type 3 operations using the Notice of Asbestos removal work form</p> <p>6.. Ensure that personnel have the appropriate training:</p> <ul style="list-style-type: none"> <li>• MTCU Asbestos Type 3 worker training / Type 3 supervisor training</li> </ul>
<p><b>During Your Work</b></p>	<p><b><u>Pre-Abatement Work</u></b></p> <p>1. Isolate the work area with poly sheeting by constructing an enclosure suitable for the operation being conducted and post Asbestos hazard warning signs.</p> <ul style="list-style-type: none"> <li>• Use polyethylene or other suitable material that is impervious to asbestos, held in place with appropriate tape and adhesive.</li> <li>• Typically, 6-mil polyethylene is used on the walls and heavier polyethylene is used on the floor (it must withstand foot traffic).</li> <li>• When existing walls aren't appropriate for the enclosure, it may be necessary to erect temporary walls to which the plastic barrier can be attached.</li> <li>• All joints must overlap and be taped to ensure the area is completely sealed off.</li> <li>• Regulation 278/05 requires you to have one or more transparent observational windows when you're using opaque, Type-3 enclosures for operations where non-friable asbestos is disturbed in any way with power tools not attached to dust collectors equipped with HEPA vacuums.             <ul style="list-style-type: none"> <li>○ Keep the windows clean and unobstructed</li> </ul> </li> <li>• Asbestos materials should not be disturbed until the enclosure is complete and negative air is in place.</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# Type 3 Asbestos Operations

	<ul style="list-style-type: none"> <li>○ In situations where asbestos debris or dust is lying on any surface of the work area and will be disturbed during the construction of the enclosure then the area must be precleaned using a damp cloth, or by using a vacuum equipped with a HEPA filter, before the enclosure is built.</li> <li>○ Suitable personal protective equipment, including respirators, should be worn during precleaning and during all work which disturbs or could disturb asbestos during the building of enclosures.</li> </ul> <ul style="list-style-type: none"> <li>● If asbestos is being removed from an entire floor, the elevators must be prevented from stopping at that floor.</li> <li>● If scaffolding is used during the asbestos removal operation the open ends of the scaffold tubing must be sealed.</li> <li>● Any openings such as stairways, doors (including elevator doors), windows, and pipe/conduit penetrations must also be sealed off.</li> </ul> <ol style="list-style-type: none"> <li>2. Make safe any electrical services in the work area.             <ul style="list-style-type: none"> <li>● Any temporary power supply for tools or equipment should have a ground fault circuit interrupter (GFCI).</li> <li>● if you plan to use wet removal methods, the electrical power supply in the area should be shut down, isolated, locked, and tagged to prevent electric shock.</li> </ul> </li> <li>3. Block and disable HVAC systems that feed or pass through the work area</li> <li>4. Conduct efficiency testing on all HEPA equipment (vacuum, negative air unit)             <ul style="list-style-type: none"> <li>● A competent worker must inspect and maintain the negative air units before each use to make sure that air isn't leaking and that the HEPA filter isn't damaged or defective (</li> </ul> </li> <li>5. Install HEPA negative air units for type III operations, unless the building will be demolished post abatement or the asbestos removal is done outdoors.             <ul style="list-style-type: none"> <li>● Arrange the units with air discharged to the outdoors whenever possible.</li> <li>● A competent person must use a manometer to measure air pressure within the enclosure relative to outside the enclosure</li> </ul> </li> </ol>
--	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1




# Type 3 Asbestos Operations

- Add neg.-air units until a negative pressure differential within the enclosure is achieved of 0.02 inches of water.

6. Install worker decontamination facilities suitable for the operation being conducted

- For Type III - 3 chambers consisting dirty room, shower (hot/cold running water) and change room

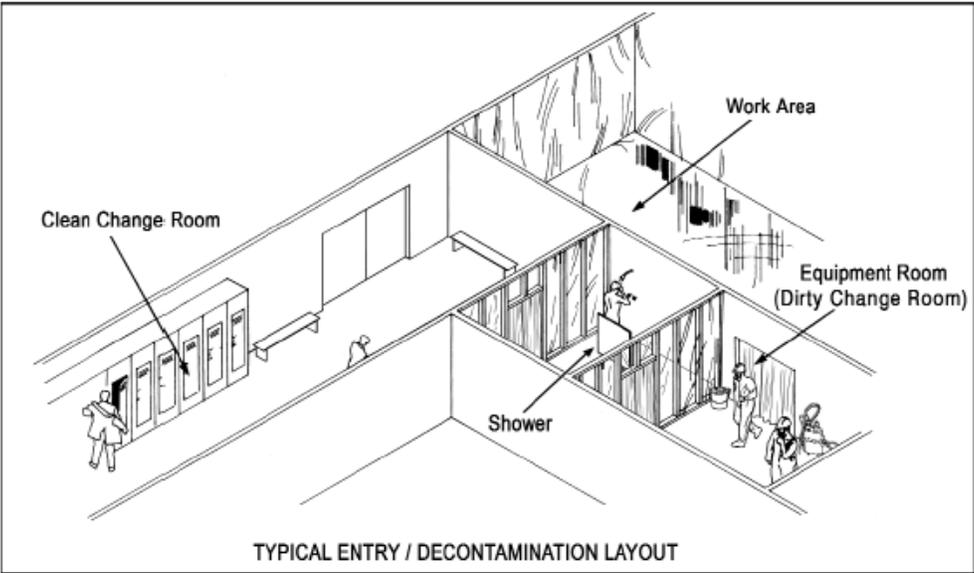

7. Protective clothing must be worn by every worker who enters the work area,
- Protective clothing must be made of a material that does not readily retain or permit penetration of asbestos fibres
  - Must consist of head covering and full body covering that fits snugly at the ankles, wrists and neck, in order to prevent asbestos fibres from reaching under garments and skin under the protective clothing
  - must be repaired or replaced if torn.
8. Respirators must be selected that are suitable for the operation being conducted. See Appendix.


**Abatement Work**

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# Type 3 Asbestos Operations

1. Any person entering the enclosure must wear the appropriate PPE suitable for the operation being performed
2. For entry workers enter the clean change room and:
  - Remove street clothes
  - Put on disposable coveralls
  - Inspect their respirators
  - Replace filters and perform other maintenance (e.g., change power packs on powered air-purifying respirators)
  - Enter the shower room and go (without showering) into the equipment room.
  - Put on their boots, hardhats, and other equipment from the previous shift.
  - Enter the dirty work area through the last curtained doorway
  - Put on and seal-check respirators
  - Go to the curtained doorway.
3. A competent worker must inspect the work area for defects in the enclosure at the beginning and end of each shift.
  - Any defect must be repaired immediately – No work is allowed until the defect is repaired.
4. Prior to disturbing any ACM, apply water to ACM and wait for water to penetrate
  - To improve penetration of the water and reduce runoff and dry patches, a “wetting agent” must be added to the water
  - You may need to spray this “amended water” repeatedly to penetrate the ACM and to keep it wet
5. Remove ACM and immediately place in disposal bag or other suitable container.

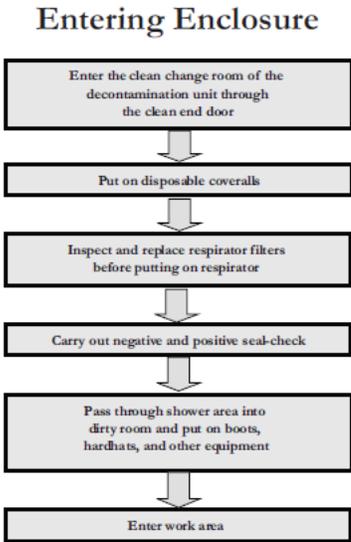

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# Type 3 Asbestos Operations

- 6. Clean up resulting debris and dust promptly as work progresses leaving the work area clear of debris each shift. Use wet sweeping or HEPA equipped vacuum for clean-up.
- 7. Package waste in double containment with proper Asbestos warning labels.
- 8. Once all the asbestos has been removed, tools and equipment—including scaffolding, ladders, etc.—must be thoroughly cleaned by damp-wiping or HEPA-vacuums to remove any settled asbestos dust. The negative air units must keep operating during this time.
- 9. Supervisors must conduct a thorough inspection to determine that all materials identified in the owner’s designated substance survey that are part of the scope of work have been removed.
- 10. Apply a fibre/dust lockdown agent to capture any airborne dust that might settle after cleaning and allow 24hrs for lockdown to dry.
- 11. Perform a final visual clearance inspection.
  - Supervisors must conduct a thorough inspection to determine that cleaning and lockdown has achieved a dust free condition on all surfaces within the enclosure.
- 12. An air clearance test must be performed if the building will be reoccupied.
  - Test results must indicate that airborne fibres are <0.01f/cc of air.
  - This is not required in buildings that will be demolished post abatement.
- 13. All enclosure sheets, drop sheets, cloths/mops, used PPE and vacuum bags/filters must be disposed of as Asbestos waste.
- 14. Each worker that leaves the enclosure FOR ANY REASON, must go through a personal decontamination process as follows:

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# Type 3 Asbestos Operations

	<ul style="list-style-type: none"> <li>• Bulk decontamination of their PPE by wiping or HEPA vacuuming off dust</li> <li>• Enter dirty room and remove footwear and clothing</li> <li>• Dispose of clothing as Asbestos waste in supplied disposal bag in the dirty room</li> <li>• Enter the wash facility/shower while still wearing respirator.</li> <li>• Place filter cap or tape over the respirator filter and then remove respirator and wash respirator.</li> <li>• Complete personal wash of hands face or full shower</li> <li>• Proceed to clean room and change into street clothes</li> </ul>	<h3>Leaving Enclosure</h3> <pre> graph TD     A[Leave work area and enter dirty change room] --&gt; B[HEPA vacuum or damp wipe all visible dust and fibres from PPE.]     B --&gt; C[Remove and place contaminated clothing in asbestos disposal bags. Store equipment, footwear, and underwear. Keep respirator on.]     C --&gt; D[Protect filter port from water. Enter shower with respirator on, rinsing respirator.]     D --&gt; E[Remove respirator.]     E --&gt; F[Shower thoroughly with soap. Exit shower and move to clean room. Dry with towel.]     F --&gt; G[Dry and store respirator. Dress and drink water to hydrate.]             </pre>
<b>After You Finish</b>	<ol style="list-style-type: none"> <li>1. All polyethylene used for lining and in enclosures must be wetted, disposed of as asbestos waste, and not be reused.                             <ul style="list-style-type: none"> <li>• Drop sheets must be wetted and then folded so that any residual dust or scrap is contained inside the folds.</li> <li>• Dispose of drop sheets as asbestos waste.</li> </ul> </li> <li>2. After the work is completed, barriers and portable enclosures that are rigid and that will be reused must be cleaned by damp-wiping or HEPA-vacuuming. Barriers and</li> </ol>	

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# Type 3 Asbestos Operations

	<p>portable enclosures must not be reused unless they are rigid and can be cleaned.</p> <ol style="list-style-type: none"> <li>3. After the work area has passed both the visual inspection and air-clearance test, you can shut down the negative air filtration units.             <ul style="list-style-type: none"> <li>• The negative-air system must be completely decontaminated. All pre-filters must be removed and disposed of as asbestos waste.</li> <li>• Seal the inlet and outlet with 2 layers of 6-mil polyethylene.</li> </ul> </li> <li>4. Teardown should be done as a Type 2 operation and workers must be adequately protected.</li> <li>5. Place waste in a disposal bin that has appropriate labelling as per O.Reg.347 General – Waste Management.</li> <li>6. Ensure the selected waste hauler has appropriate Ministry of Environment Certificate of Approval/ Environmental Compliance Approval to haul Asbestos.</li> <li>7. Ensure landfill that the Asbestos is being hauled to has appropriate Ministry of Environment Certificate of Approval/ Environmental Compliance Approval to receive Asbestos waste.</li> <li>8. Supervisor must complete a declaration letter after all removals and disposal complete.</li> <li>9. The supervisor is to report all asbestos exposure to head office, who in turn informs the ministry of Labor as appropriate.</li> </ol> <p><b>Notes:</b></p> <ul style="list-style-type: none"> <li>• Only pure Asbestos or Asbestos that is not mixed with a binder (such as fire proof spray) requires Transportation of Dangerous Goods placarding.</li> <li>• <u>ALL Asbestos containing building materials</u> contain only a percentage of Asbestos, as the Asbestos is mixed with other materials as a binder.</li> <li>• Never apply false or incorrect placarding to load(s), as that is a violation of TDG legislation.</li> </ul>
--	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# Type 3 Asbestos Operations

- Ontario Occupational Health and Safety Act
- Ontario Reg. 278/05 Designated Substance – Asbestos on Construction Projects and in Buildings and Repair Operations
- Ontario Reg. 213/91 Construction Projects
- Ontario Reg. 347 General Waste Management
- Federal Transportation of Dangerous Goods Act and Associated Regulation
- IHSAs: Asbestos Controls for Construction, Renovation and Demolition
- MOL: A Guide to the Regulation Respecting Asbestos on Construction Projects and in Buildings and Repair Operations

This Safe Work Procedure must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

## Appendices

### Outdoor Type 3 Operations

All requirements are the same as indoor type 3 operations except:

- No final visual inspection or clearance air test is required after removal
- An enclosure is required only when removing non-friable asbestos-containing material using power tower tools without HEPA filtered vacuums.
- Full decontamination facilities are required for outdoor type 3 operations
  - except for outdoor operations on non-friable asbestos containing materials involving power tools without dust collecting devices equipped with HEPA Filters (only wash-up facilities are required)
- Dust and waste must not be allowed to fall freely from one work level to another

For outdoor operations, it will generally not be possible to connect a decontamination facility directly to the work area.

- In such situations portable decontamination units will have to be provided
- When leaving the work area, workers should thoroughly vacuum their personal protective equipment and respirators and wash their footwear, but **DO NOT REMOVE RESPIRATORS.**

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# Type 3 Asbestos Operations

- Workers should immediately put on another set of disposable coveralls having a different color from those worn inside the work area, before making their way to the decontamination unit.
- All transit routes should be clearly marked to keep out other workers and the public.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1





# Type 3 Asbestos Operations

## RESPIRATOR CHART FOR ASBESTOS WORK

“ACM” means asbestos-containing material.

Description of work	Required respirator	
<b>Type 3 operations</b>		
Breaking, cutting, drilling, abrading, grinding, sanding, or vibrating non-friable ACM using power tools, if the tool is not attached to a dust-collecting device equipped with a HEPA filter. <ul style="list-style-type: none"> <li>➤ Removing or disturbing more than one square metre of friable ACM during the repair, alteration, maintenance, or demolition of all or part of a building, aircraft, ship, locomotive, railway car or vehicle, or any machinery or equipment.</li> <li>➤ Spraying sealant on friable ACM.</li> <li>➤ Cleaning or removing air-handling equipment, including rigid ducting but not including filters, in a building where sprayed fireproofing is ACM.</li> <li>➤ Repairing, altering, or demolishing all or part of a kiln, metallurgical furnace, or similar structure that is made in part of refractory ACM.</li> <li>➤ Repairing, altering, or demolishing all or part of any building in which asbestos is or was used in the manufacture of products, unless the asbestos was cleaned up and removed before 16 March 1986.</li> </ul>	Material is not wetted	<b>C</b>
	Material is wetted to control fibres	<b>B</b>
	Material is not wetted	<b>D</b>
	Friable ACM other than chrysotile was applied or installed by spraying, and is wetted to control fibres	<b>C</b>
	Friable chrysotile ACM was applied or installed by spraying, and is wetted to control fibres	<b>B</b>
	Friable ACM was not applied or installed by spraying, and is wetted to control fibres	<b>B</b>

\* **Warning:** For any **Type 2** operation in which wetting is required but would cause a greater hazard or damage, then dry work is permitted. Dry work, however, usually results in more airborne fibres. IHSA recommends that you select a category B respirator (see below).

## KEY TO RESPIRATOR CHART

A	B	C	D
Air-purifying half-mask respirator with N-100, R-100, or P-100 particulate filter. If the worker requests the respirator from the employer, then the worker must wear it.	Choose any of the following: <ul style="list-style-type: none"> <li>➤ Air-purifying full-facepiece respirator with N-100, R-100, or P-100 particulate filter.</li> <li>➤ Powered air-purifying respirator with a tight-fitting facepiece (either full or half facepiece) and a high-efficiency filter.</li> <li>➤ Negative-pressure (demand) supplied-air respirator with a full facepiece.</li> <li>➤ Continuous-flow supplied-air respirator with a tight-fitting facepiece (full or half facepiece).</li> </ul>	Pressure-demand supplied-air respirator with a half facepiece.	Pressure-demand supplied-air respirator with a full facepiece.

Disposable respirators or dust masks are not recommended for avoiding exposure to asbestos fibres because it's difficult to perform negative-pressure and positive-pressure seal checks.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



Safe Work Procedure

# Chemical & Hazardous Materials – Handling and Storage

Safe Work Procedure Number

SWP-O11

Potential Hazards Present	Required Safety Devices: * may be required based on risk – see FLHA form			
<ul style="list-style-type: none"> <li>• Chemical flammability/reactivity,</li> <li>• Corrosive chemicals,</li> <li>• Asphyxiation hazards</li> <li>• Damage to body organs or systems</li> <li>• Occupational diseases such as:                             <ul style="list-style-type: none"> <li>○ Contact dermatitis,</li> <li>occupational asthma</li> <li>occupational cancers.</li> </ul> </li> </ul> <p style="text-align: center;"><b>Refer to Safety Data Sheet (SDS) for specific hazards associated with the chemicals you work with or may be exposed to</b></p>		<p><b>Safety Footwear*</b></p>		<p><b>Respiratory Protection</b></p>
		<p><b>Disposable coveralls*</b></p>		<p><b>Hard Hats*</b></p>
		<p><b>Safety glasses*</b></p>		<p><b>Gloves*</b></p>

### Required Materials & Equipment

- Spill Kits
- Shelving


### Procedure

<b>Before You Start</b>	<p><b>Receiving materials</b></p> <ul style="list-style-type: none"> <li>• All hazardous substances / chemical are to be received through the warehouse manager or onsite by designated person.                             <ul style="list-style-type: none"> <li>○ SDS sheets will be obtained at the time of receipt</li> </ul> </li> </ul>
-------------------------	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Chemical & Hazardous Materials – Handling and Storage

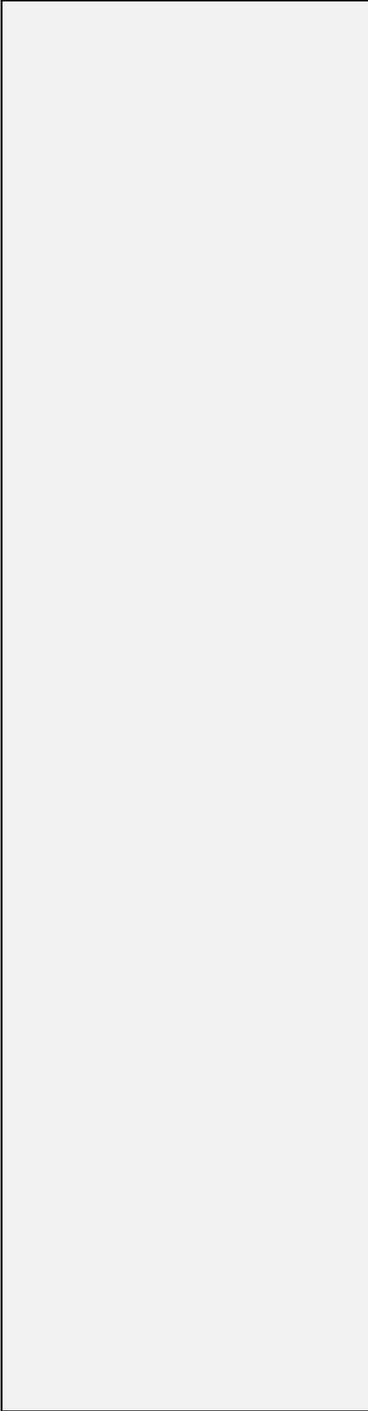

- All hazardous materials are added to the chemical inventory upon receipt.
  - As required, an inventory of substances will be conducted to verify that that the receipt process is being completed
- Storage of materials**
- Non-hazardous chemicals should be stored in cabinets or on shelves in such a manner as to limit contact with incompatible materials, and to prevent their entry into floor or sink drains in the event of a leak from a container.
  - It is not necessary to provide spill containment for non-hazardous solids
  - Non-compatible chemicals shall be separated by a noncombustible solid partition or stored in approved hazardous material storage cabinets
  - Expired material if determined to be unusable should be sent for disposal as a waste chemical through the gas and chemical handlers.
  - Storage areas:
    - Must be secure when not in use and are available to authorized personnel only.
    - Are to be well illuminated.
    - Open flames, smoking and localized heating units are not permitted in or near storage areas.
    - Mixing of chemicals on surfaces used for storage is not allowed.
    - Aisles surrounding storage areas are to be free from obstruction and other tripping hazards.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1




# Chemical & Hazardous Materials – Handling and Storage

	<ul style="list-style-type: none"> <li>• Storage Shelves           <ul style="list-style-type: none"> <li>○ Large or heavy bottles and containers are to be stored on shelves no higher than waist level.</li> <li>○ Containers of chemicals are to be stored at or below eye level, where possible.</li> <li>○ Bottles or containers shall not protrude over the shelf edges.</li> <li>○ Enough storage space is allotted, ensuring that shelves are not crowded.</li> <li>○ Empty bottles are to be removed from the shelves and disposed of in accordance with procedure.</li> <li>○ Shelves and benches are to be level and stable.</li> <li>○ Shelving units are to be securely fastened to the wall.</li> <li>○ The weight limit of the shelves shall not exceeded.</li> <li>○ Shelves are to be clean, free from chemical contamination, or any other obstruction or waste (e.g. papers).</li> </ul> </li> <li>• Storage Containers           <ul style="list-style-type: none"> <li>○ Storage containers are to be inspected periodically for rust, corrosion and leakage.</li> <li>○ Damaged containers are to be replaced or repaired immediately.</li> <li>○ Chemicals are to be stored in sealed containers</li> </ul> </li> </ul> <p><b>Transporting materials</b></p>
--	---

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Chemical & Hazardous Materials – Handling and Storage



- Anyone who handles (ships, transports, and receives) dangerous goods by road, rail, air, or water (marine) must comply with the TDG Regulations. Handling is defined in the TDG Act as:
    - “handling means loading, unloading, packing or unpacking dangerous goods in a means of containment for the purposes of, in the course of or following transportation and includes storing them in the course of transportation”
  - When the following three conditions are met, the TDG Regulations will apply:
    - the product meets the definition for a dangerous good, and
    - if the product does not meet any of the exemptions (see below) in the TDG Regulations, and
    - if the product is being transported outside the boundaries of a facility.
- Use of materials**
- Read the label for hazard and safe handling information
  - Review the safety data sheet for additional precautions and first aid details
  - Confirm product use:
    - Concentration/dilution
    - Mixing with other products
  - Select and inspect appropriate personal protective equipment:
    - Eye/face protection
    - Gloves

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Procedure

# Chemical & Hazardous Materials – Handling and Storage

Safe Work Procedure Number

SWP-O11

	<ul style="list-style-type: none"> <li>○ Apron</li> <li>○ Footwear</li> <li>○ Respirator (must be fit tested)</li> <li>● Locate nearest:             <ul style="list-style-type: none"> <li>○ Eye wash station</li> <li>○ Spill kit</li> </ul> </li> </ul>
<p><b>During Your Work</b></p>	<ul style="list-style-type: none"> <li>● Be aware of other personnel and processes in your work area</li> <li>● Try to work in well-ventilated areas</li> <li>● Use the appropriate personal protective equipment</li> <li>● Dispense slowly to avoid splashes</li> <li>● Dispense only the amount you need for the immediate work</li> <li>● Keep containers sealed that are not for immediate use</li> <li>● Maintain a tidy work area</li> <li>● Do not eat or drink in work area</li> </ul>
<p><b>After You Finish</b></p>	<ul style="list-style-type: none"> <li>● Clean your work area</li> <li>● Ensure all containers are sealed and labels can be read</li> <li>● Store safely and separate from any incompatible materials</li> <li>● Store flammables in designated area</li> <li>● Clean and put away the personal protective equipment</li> <li>● Wash hands and any exposed areas after use</li> <li>● Follow procedure for cleaning any contaminated clothing</li> <li>● Let a supervisor know about any personal protective equipment that needs replacement or maintenance</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Procedure

# Chemical & Hazardous Materials – Handling and Storage

Safe Work Procedure Number

SWP-O11

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- PDI: Standard #12 WHMIS
- PDI: Chemical Spills Procedure
- Occupational Health and Safety Act, Sections 37(1)
- Regulation 851, R.R.O, 1990, Industrial Establishment
- Regulation 860, R.R.O. 1990, WHMIS
- Ontario Reg. 833 R.R. O. 1990, Control of Exposure to Biological and Chemical Agents
- Ontario Reg. 835-846, R.R.O. 1990, for Designated Substances
- Ontario Fire Code (O. Reg. 388/97)
- National Fire Code of Canada Controlled Drugs and Substances Act, 1996 (c. 19)
- Hazardous Products Act and Regulation, R.S.C. 1985, C. H-3.

This Safe Work Procedure must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Carbon Monoxide (CO)

Safe Work Practice Number: SWP-012

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk – see FLHA form	
<p>When inhaled, carbon monoxide blocks the body's ability to absorb oxygen</p> <p>Carbon monoxide is a flammable gas. Mixtures of 12 to 75 per cent carbon monoxide in air can catch fire and explode when there is a source of ignition present.</p> <p>When heated to high temperatures, carbon monoxide can react violently with oxidizing agents such as oxygen, ozone, peroxides and chlorine.</p>	 <b>Respirator*</b>	 <b>Safety Glasses*</b>
	 <b>Safety* Footwear</b>	 <b>Hard Hat*</b>

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ Know the signs               <ul style="list-style-type: none"> <li>• headache</li> <li>• nausea or vomiting</li> <li>• weakness</li> <li>• breathlessness</li> <li>• drowsiness, irritability and impaired judgement</li> </ul> </li> <li>✓ Know the sources               <ul style="list-style-type: none"> <li>• Gas-powered engines</li> <li>• Fires</li> <li>• Natural gas space heaters</li> <li>• Furnaces</li> <li>• Kilns</li> <li>• Boilers</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not rely on smell or sight for detection. Carbon Monoxide is odourless and invisible .</li> <li>✗ Do not run an engine in an enclosed space unless a ventilation or exhaust system is available, working properly and is equipped with active monitoring with an alarm.</li> <li>✗ Do not allow workers to work alone in places where CO may accumulate</li> <li>✗ Do not ignore CO poisoning symptoms.</li> <li>✗ Do not use quarter- or half-face piece respirators fitted with chemical cartridges.</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Carbon Monoxide (CO)

<ul style="list-style-type: none"> <li>• Workers indoors can also be exposed if vehicles idle next to fresh air intakes on the building.</li> <li>✓ Monitor the concentration of CO in the air on a regular basis (in locations where CO is present)             <ul style="list-style-type: none"> <li>• Use a direct-reading instrument to test the air and warn workers about dangerous levels of CO</li> </ul> </li> <li>✓ Where possible, operate all fuel-powered tools and equipment outdoors. For example, put welding machines and generators outside and run the leads or the pump into the building.</li> <li>✓ If fuel-powered tools and equipment must be used inside, avoid unnecessary idling, racing the engine, or braking erratically</li> <li>✓ Regularly inspect and maintain all equipment that produces CO to ensure there is no leakage</li> <li>✓ Make sure the work area is well ventilated.             <ul style="list-style-type: none"> <li>• Keep doors and windows open, if possible.</li> <li>• Use fans to bring in fresh air from outside.</li> <li>• When necessary, use exhaust hoses to draw engine exhaust out of the work area.</li> </ul> </li> </ul>	
---	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Carbon Monoxide (CO)

<ul style="list-style-type: none"> <li>✓ Inspect and maintain fuel-powered tools and equipment in accordance with the manufacturer’s instructions to ensure they run properly and as cleanly as possible.</li> <li>✓ Look for such things as leaking exhaust connections or manifolds, as well as loose or broken floorboards, exhaust pipes, and mufflers.</li> <li>✓ Ensure that the air intake and fuel systems are working correctly.</li> <li>✓ Use electric tools or equipment where possible and when working in poorly ventilated areas.</li> <li>✓ Use an indirect-fired heater for heating the work area rather than a direct-fired heater (e.g., open-flame or closed-flame heater). Indirect-fired heaters vent combustion by-products (including CO) outdoors while directing the heated air inside.</li> <li>✓ If there is prolonged exposure to CO or a high concentration of CO, workers must wear one of the following two types of breathing protection: <ul style="list-style-type: none"> <li>• Positive-pressure, self-contained breathing apparatus (SCBA) — This consists of an air cylinder, which is normally worn on the back, and a full-face mask to protect the eyes and</li> </ul> </li> </ul>	
--	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Carbon Monoxide (CO)

<p>face. A hose connects the face mask to the regulator and the air cylinder. “</p> <ul style="list-style-type: none"> <li>• Positive-pressure, supplied-air (airline) respirator — This consists of an airline attached to a regulator and a full-face piece. The worker must also wear an “escape” air bottle to allow escape if the air supply is cut off.</li> </ul> <p>✓ If a worker is exposed to CO:</p> <ul style="list-style-type: none"> <li>• Move the poisoned worker to fresh air.</li> <li>• Keep the worker warm and at rest.as activity may worsen the effects of CO by increasing oxygen demand.</li> <li>• If the worker is having trouble breathing or is not breathing, start assisted ventilation using a pocket mask. Add oxygen to the mask, if available.</li> <li>• If the worker has no pulse, begin cardiopulmonary resuscitation (CPR). Because the body rids itself of CO when removed from the exposure, it is critical to continue giving the worker assisted ventilation with oxygen until medical aid arrives.</li> <li>• Call for a doctor</li> </ul>	
---	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Ontario Reg. 213/91: Construction Projects
- Ontario Regulation 1990, Reg. 851: Industrial Establishments

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Carbon Monoxide (CO)

Safe Work Practice Number

SWP-012

- Ontario Regulation 833: Control of Exposure to Biological or Chemical Agents sets the OEL for carbon monoxide as 25 parts per million (ppm) for an 8-hour Time-Weighted Average (TWA). Exposure shall not exceed 75 ppm for any period of 30 minutes and 125 ppm at any time.

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Sharps

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk – see FLHA form	
Needles and sharps expose you to the risk of punctures and cuts, which can additionally provide a portal for the entry of pathogens and chemicals.	 <b>Puncture Resistant Gloves*</b>	 <b>Safety Glasses*</b>
Biologically & chemically contaminated sharps provide an additional infection and health risk	 <b>Safety* Footwear</b>	 <b>Hard Hat*</b>

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ Report all sharps found on a work site immediately               <ul style="list-style-type: none"> <li>• "Sharps" include needles, as well as items such as scalpels, lancets, razor blade, scissors, metal wire, retractors, clamps, pins, staples, cutters, and glass items. Essentially, any object that is able to cut the skin can be considered a "sharp"</li> </ul> </li> <li>✓ Wear nitrile gloves while disposing of sharp objects that are contaminated with bodily fluids.</li> <li>✓ Use tongs, tweezers or hand clamps to pick up and dispose of sharp objects.</li> <li>✓ If there is a risk of splashing, wear protective eyewear.</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not normally try to dispose of or transport sharps on your own.</li> <li>✗ Do not recap needles</li> <li>✗ Do not use your hands to pick up needles.</li> <li>✗ Do not load the waste containers beyond its capacity.</li> <li>✗ Do not compact waste. This process may spread the contamination.</li> <li>✗ Do not mix waste with regular garbage or trash.</li> <li>✗ Do not reach your hand into any waste container, receptacle, or pile of waste which may contain hazardous waste</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Sharps

<ul style="list-style-type: none"> <li>✓ Dispose of sharp objects point first in approved bio hazardous sharps containers.</li> <li>✓ Wash your hands before and after disposing contaminated sharps.</li> <li>✓ All disposal containers should be stored in such a way as to prevent access by unauthorized persons.</li> <li>✓ Disposal of bio-hazard sharps containers must be completed as per regulations.</li> <li>✓ Handle all contaminated wastes carefully to prevent body contact and injury. For example, carry objects or waste bags away from your body to reduce the chance of coming in contact with a sharp object.</li> <li>✓ Wear puncture-resistant gloves and safety boots appropriate for the situation.</li> <li>✓ If your skin is punctured by a sharp, let it bleed, flush the contacted area with water, followed by reporting the incident to your supervisor and the first aid attendant.</li> </ul>	
---	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Occupational Health and Safety Act, R.S.O. 1990, c. O.1
- Ontario Regulation 347, General – Waste Management
- CAN/CSA-Z316.6-14 - Sharps injury protection - Requirements and test methods - Sharps containers

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Animal Droppings – Birds & Bats

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk – see FLHA form	
Infections - such as Histoplasmosis & Cryptococcosis. Fungi	 <b>Disposable Gloves</b>	 <b>Safety Glasses*</b>
	 <b>Respiratory Protection</b>	 <b>Disposable Coveralls</b>
	 <b>Safety Footwear – Rubber boots</b>	 <b>Hard Hat*</b>

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ Always assume droppings are contaminated.</li> <li>✓ Review the PPE requirements for the job.               <ul style="list-style-type: none"> <li>• Appropriate respirators could range from an N95 filtering facepiece for low-risk tasks to a full facepiece air-purifying respirator or powered air-purifying respirator for high-risk tasks.</li> <li>• Make sure respirators have been fit tested, and perform a seal check.</li> </ul> </li> <li>✓ If you have a weakened immune system, you should consult your doctor before working in the area.</li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not disturb droppings or contaminated soil as this may release tiny particles into the air called “spores”. The spores can be inhaled and infect a worker’s lungs.</li> <li>✗ Do not dry-sweep or dry-shovel material.</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Animal Droppings – Birds & Bats

<ul style="list-style-type: none"> <li>✓ Eliminate the roost (nest) if the building is not going to be demolished and seal entry points if possible.</li> <li>✓ Soak the material with water or a wetting agent to keep dust and spores down.</li> <li>✓ Use a HEPA vacuum to clean up the contaminated material (if available).</li> <li>✓ Dispose of the waste in 6-ml disposal bags and follow the disposal procedures</li> <li>✓ For larger contamination, a disinfectant may be used. For these applications, consult the manufacturer’s directions.</li> </ul>	
--	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Ontario Reg. 213/91: Construction Projects
- PDI Personal Protective Equipment Standard
- Priestly SWP O18 Mould Procedures

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Ultra-Violet Radiation

Potential Hazards Present		Required Personal Protective Equipment * may be required based on risk – see FLHA form	
<b>Short-term exposure</b> <ul style="list-style-type: none"> <li>• Sunburn-like inflammation on exposed skin</li> <li>• Skin irritation</li> <li>• Erythema (skin reddening)</li> <li>• Eye irritation</li> <li>• Conjunctivitis (irritation of the membrane lining the eyelids and eyeballs)</li> <li>• Temporary loss of vision</li> <li>• Long-term damage to the corneas</li> </ul>		 <b>Gloves*</b>	 <b>Tinted Safety Glasses*</b>
		 <b>Long pants</b>	 <b>Long Sleeved shirt*</b>
		 <b>Safety* Footwear</b>	 <b>Hard Hat*</b>
<b>Long-term exposure</b> <ul style="list-style-type: none"> <li>• Severe burns with blistering</li> <li>• Skin cancer</li> <li>• Melanoma</li> <li>• Blindness</li> </ul>			

DO	DO NOT
SUN	<ul style="list-style-type: none"> <li>✘ Do not forget to apply sunscreen to those often missed spots, like your ears.</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Ultra-Violet Radiation

- ✓ Be familiar with the outdoor UV index. It will tell you when the sun's UV levels are high.

Exposure Category	UV Index
LOW	0 - 2
MODERATE	3 - 5
HIGH	6 - 7
VERY HIGH	8 - 10
EXTREME	11 +

- ✓ When the UV Index is 3 or higher, protect your skin as much as possible. In general, the UV Index in Canada can be 3 or higher from 11 a.m. to 3 p.m. between April and September, even when it's cloudy.
- ✓ It is important to use UV protection even if cloud, fog, or haze is blocking the sun. These things will lower the air temperature, but they do not block harmful UV rays from getting to you.
- ✓ Certain environments will increase your risk of UV exposure. Water, sand, concrete, and snow will reflect UV rays back at you and increase your UV exposure.
- ✓ Apply SPF30 or higher broad-spectrum water resistant sunscreen 20 minutes prior to going outside and reapply at least every two hours

- ✗ Do not be fooled by a cloudy day—the sun's harmful UV rays can penetrate through clouds and even a thick fog!
- ✗ Do not forget to wear long-sleeved shirts, pants, and a hat with a three inch-wide brim all around that can protect your face and neck
- ✗ Do not forget sun exposure through Windows. While window glass efficiently filters out most UVB radiation, it only minimally filters out UVA rays because these rays have a longer wavelength.
- ✗ Do not use temperature as an indicator of the UV level. Even if it's cool outside, you can still burn. UV can be high on a cool day in summer, or on a warm day in the spring. Check the UV Index to be sure. You can even get sunburned in winter, when the UV Index is low: fresh white snow reflects the sun's rays, and can more than double the amount of UV that you receive

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Ultra-Violet Radiation

<ul style="list-style-type: none"> <li>✓ Wear a hat (Hard hat where applicable) and wrap-around sunglasses or safety glasses (where required) that provide good UV protection</li> <li>✓ Wear clothes that cover the arms and legs</li> <li>✓ Work in the shade whenever possible.</li> <li>✓ Plan work routines so outdoor tasks are done early in the morning or later in the afternoon when UV levels are lower.</li> <li>✓ Seek shade as much as possible, especially during breaks</li> </ul> <p><b>Other Sources</b></p> <ul style="list-style-type: none"> <li>✓ See table 1 at the end of document.</li> <li>✓ Whenever UV radiation cannot be contained or confined, worker exposure should be minimized by limiting exposure times and increasing the distance between workers and the sources. Measurements are required to determine safe working distances and exposure times.</li> <li>✓ Areas where exposure to UV radiation is possible should have appropriate warning signs.</li> </ul>	
---	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Ultra-Violet Radiation

Safe Work Practice Number

SWP-015

- 25(2)(h) Occupational Health and Safety Act, R.S.O. 1990, c. O.1
- 2008 Threshold Limit Values (TLVs) for Chemical Substances and Physical Agents and Biological Exposure Indices (BEIs).

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Ultra-Violet Radiation

Table 1: Common UV Sources in the Workplace

Source	Potential for Overexposure	Hazard Description	Recommended Controls
The Sun	Very high	UV from the sun is highest in spring and summer from 11 a.m. to 4 p.m. UV guidelines can be exceeded in 15 minutes on a clear summer day. Clouds may do little to reduce UV levels.	Preventing Overexposure to UV Radiation from the Sun
Electric Welding Arcs	Very high	Welding arcs can exceed the UV guidelines in seconds within a few meters of the arc. Besides workers, bystanders and passers-by are often overexposed to UV from the arcs.	Engineering, Administrative Controls, and Personal Protection
UV Curing Lamps	Medium	Lamps are usually inside cabinets, but substantial UV radiation can escape through openings.	Engineering Controls, Administrative Controls
Black Lights	Medium to Low	Low-power UV-A lamps used in non-destructive testing (NDT), insect control, and entertainment.	Engineering Controls, Personal Protection
Germicidal Lamps	High	UV-B- and UV-C-emitting lamps used to sterilize work areas in hospitals and laboratories.	Engineering Controls, Personal Protection
UV Lasers	High	Source of intense UV radiation at a single wavelength, with no visible light.	Laser Safety Standards (e.g. ANSI Z-136.1)
Lighting	Low	Most lamps used for lighting are made to emit little or no UV radiation.	No precautions needed under normal conditions

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Ultra-Violet Radiation

Safe Work Practice Number

SWP-015

*Please note that the above table is intended as guidance only and is not comprehensive. The actual UV exposure levels in a workplace depend on conditions there. A UV radiation survey is required to determine the actual exposure levels at a particular workplace.*

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Procedure

# LEAD - Type 1, 2 & 3 Operations

Safe Work Procedure Number

SWP-016

Potential Hazards Present	Required Safety Devices: * may be required based on risk – see FLHA form			
Inhalation of Lead dust/fumes Ingestion of Lead dust Acute/chronic poisoning affecting multiple organs		<b>Safety Boots*</b>		<b>Respiratory Protection</b>
		<b>Disposable coveralls</b>		<b>Hard Hats*</b>
		<b>Safety glasses*</b>		<b>Gloves</b>

**Required Materials & Equipment**

- Rip proof poly sheeting
- 2" or 3" tape
- Spray glue
- Lumber for construction of temporary walls and decontamination units
- Temporary lights
- Heavy duty clear disposal bags
- Portable shower with water heater
- High Efficiency Particulate Air (HEPA) negative air unit
- HEPA vacuum
- Water amending agent

**Procedure**

<b>Before You Start</b>	<p>1. Lead can be found in any industrial or residential building in 2 distinct ways:</p> <ul style="list-style-type: none"> <li>• It can be found <u>in construction materials</u> such as paints, coatings, mortars, concrete, solder and sheet metal</li> <li>• It can be present at a construction site in existing structures, building components, and where Lead was previously used in a manufacturing process</li> </ul> <p>Construction activities of particular concern include:</p> <ul style="list-style-type: none"> <li>• Abrasive blasting of structures coated with Lead containing paints</li> </ul>
-------------------------	--

<b>JH&amp;SC Review:</b>	<b>Approved By:</b>	<b>Date Created:</b>	<b>Date of Last Review:</b>	<b>Rev. No.</b>
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# LEAD - Type 1, 2 & 3 Operations

	<ul style="list-style-type: none"> <li>• Application or removal of Lead containing paints</li> <li>• Welding, burning or high temperature cutting of Lead containing coatings or materials</li> <li>• Removal of Lead containing dust using an air mist extraction system</li> <li>• Removal of Lead containing mortars/concrete/tiles/terrazzo using electric or pneumatic cutting device</li> </ul> <p>Review the owner’s designated substance survey (DSS) to determine what Lead containing materials are present and identify the location(s).</p> <p>Workers must not be exposed to an airborne concentration of Lead that exceeds its occupational exposure limit (inorganic Lead 0.05mg/m<sup>3</sup>). If workers are likely to be overexposed during work at a project, the workers involved will be offered medical surveillance.</p> <p>Do not disturb Lead or presumed Lead, unless you are trained, and all applicable safe work procedures have been followed.</p> <p>2. Determine what type of Lead containing material is present:</p> <ul style="list-style-type: none"> <li>- paint/coating</li> <li>- masonry product</li> <li>- sheet metal</li> <li>- solder</li> <li>- free dust</li> </ul> <p>3. Evaluate what activities are required and what work methods will be employed in order to determine what precautions are required for the operation being conducted (type 1, 2a, 2b, 3a, 3b criteria from Ministry of Labour Guideline Lead on Construction Projects in Ontario is located in the appendices of this procedure)</p> <p>4. Ensure that personnel have the appropriate training:</p> <ul style="list-style-type: none"> <li>• WHMIS training</li> <li>• Lead hazard awareness training including health effects and symptom recognition</li> <li>• Personal hygiene, respirator requirements and work measures and procedures</li> <li>• Use, cleaning and disposal of respirators and protective equipment</li> </ul>
--	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# LEAD - Type 1, 2 & 3 Operations

	<p>5. Workers that are provided the option of participating in a <b>voluntary</b> medical surveillance program may opt out of this program. A surveillance program is recommended for workers that will be working where airborne Lead exposure takes place. The surveillance programs include:</p> <ul style="list-style-type: none"> <li>• Pre-placement medical exams</li> <li>• Periodic medical exams</li> <li>• Clinical tests/biological monitoring</li> <li>• Health education</li> <li>• Record keeping</li> </ul>
<b>During Your Work</b>	<p><b><u>Pre-Abatement Work</u></b></p> <ol style="list-style-type: none"> <li>1. Isolate the work area with poly sheeting by constructing an enclosure suitable for the operation being conducted (type 1, 2a, 2b, 3a, 3b Ministry of Labour Guideline Lead on Construction Projects) and post Lead hazard warning signs.</li> <li>2. Make safe any electrical services in the work area</li> <li>3. Block and disable HVAC systems that feed or pass through the work area.</li> <li>4. Conduct efficiency testing on all HEPA equipment (vacuum, negative air unit)</li> <li>5. Install HEPA negative air units for type III operations, unless the building will be demolished post abatement.             <ul style="list-style-type: none"> <li>• Arrange the units with air discharged to the outdoors whenever possible.</li> <li>• Use a manometer to measure air pressure within the enclosure relative to outside the enclosure</li> <li>• Add neg.-air units until a negative pressure differential within the enclosure is achieved of 0.02 inches of water.</li> </ul> </li> <li>6. Install worker decontamination facilities suitable for the operation being conducted             <ul style="list-style-type: none"> <li>• Type 1 wash station and change room</li> <li>• Type 2a, 2b (3 chambers) dirty room, wash station and change room</li> </ul> </li> </ol>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# LEAD - Type 1, 2 & 3 Operations

	<ul style="list-style-type: none"> <li>Type 3a, 3b (3 chambers) dirty room, shower (hot/cold running water) and change room</li> </ul> <p>7. Protective clothing must be worn by every worker who enters the work area,</p> <ul style="list-style-type: none"> <li>Protective clothing must be made of a material that does not readily retain or permit penetration of Lead dusts</li> <li>Must consist of head covering and full body covering that fits snugly at the ankles, wrists and neck, in order to prevent Lead dust from reaching under garments and skin under the protective clothing</li> <li>must be repaired or replaced if torn.</li> </ul> <p>8. Respirators must be selected that are suitable for the operation being conducted. See Appendix</p> <p>9. Respiratory protective equipment must be worn when the airborne concentration of Lead cannot be reduced below its occupational exposure limit</p> <p><b><u>Abatement Work</u></b></p> <ol style="list-style-type: none"> <li>Any person entering the enclosure must wear the appropriate PPE suitable for the operation being performed (type 1, 2a, 2b, 3a, 3b).</li> <li>Each worker that leaves the enclosure FOR ANY REASON, must go through a personal decontamination process as follows: <ul style="list-style-type: none"> <li>Bulk decontamination of their PPE by wiping or HEPA vacuuming off dust</li> <li>Enter dirty room and remove footwear and clothing</li> <li>Dispose of clothing as Lead waste in supplied disposal bag in the dirty room</li> <li>Enter the wash facility/shower while still wearing respirator.</li> <li>Place filter cap or tape over the respirator filter and then remove respirator and wash respirator.</li> <li>Complete personal wash of hands face or full shower for type 3 operations</li> <li>Proceed to clean room and change into street clothes</li> </ul> </li> <li>Place drop sheets below any Lead that will be disturbed.</li> </ol>
--	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# LEAD - Type 1, 2 & 3 Operations

4. Prior to disturbing any Lead containing mortar/masonry or terrazzo, apply water to Lead to suppress and minimize dust release.
5. Remove Lead and immediately place in disposal bag/container.
6. Clean up resulting debris and dust promptly as work progresses leaving the work area clear of debris each shift. Use wet sweeping or HEPA equipped vacuum for clean-up.
7. Inspect the enclosure daily or more frequently if necessary to ensure the integrity of the enclosure and negative air pressure in type 3 operations (refer to inspection checklist and neg-air log sheet)
8. Package waste in with proper labels.
9. Perform an initial completion inspection.
  - Supervisors must conduct a thorough inspection to determine that all materials identified in the owner’s designated substance survey that are part of the scope of work have been removed.
10. Clean all surfaces of the work area to a dust free condition by using HEPA vacuums, mopping, and wet wiping.
11. Apply a dust lockdown agent to capture any airborne dust that might settle after cleaning and allow 24hrs for lockdown to dry.
12. Perform a final visual clearance inspection.
  - Supervisors must conduct a thorough inspection to determine that cleaning and lockdown has achieved a dust free condition on all surfaces within the enclosure.
13. For type 3 operations, an air clearance test may be requested by the owner if the building will be reoccupied.
  - This is not required in buildings that will be demolished post abatement.
14. Tear down the enclosure with workers wearing PPE suitable for type 2 operations.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# LEAD - Type 1, 2 & 3 Operations

	<p>15. All enclosure sheets, drop sheets, cloths/mops, used PPE and vacuum bags/filters must be disposed of as Lead waste.</p>
<p><b>After You Finish</b></p>	<ol style="list-style-type: none"> <li>1. Place waste in a disposal bin that has appropriate labelling as per O.Reg.347 General – Waste Management. A Toxicity Characteristic Leaching Procedure (TCLP) test must be performed on all Lead waste to determine if passes or fails the criteria for hazardous waste in the jurisdiction where disposal will take place.</li> <li>2. Ensure the selected waste hauler has appropriate Ministry of Environment Certificate of Approval/ Environmental Compliance Approval to haul Lead if it is a hazardous waste. HWIN registration is also required for hazardous Lead waste.</li> <li>3. Ensure landfill that the Lead is being hauled to has appropriate Ministry of Environment Certificate of Approval/ Environmental Compliance Approval to receive Lead waste if it is a hazardous waste.</li> <li>4. Supervisor must complete a declaration letter after all removals and disposal complete.</li> </ol>

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Ontario Occupational Health and Safety Act
- Ontario Reg. 490/09 Designated Substance
- Ontario Reg. 213/91 Construction Projects
- Ontario Reg. 347 General Waste Management
- Federal Transportation of Dangerous Goods Act and Associated Regulation
- MOL: Guideline Lead On Construction Projects

This Safe Work Procedure must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Procedure

# LEAD - Type 1, 2 & 3 Operations

Safe Work Procedure Number

SWP-016

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# LEAD - Type 1, 2 & 3 Operations

## Permissible Operations and Selection Criteria for PPE

Instruction: 1. Select the appropriate work description for the work planned from Column 1 of Table B. The presumed exposure level from Table A is never exceeded by the permissible operations in Table B.

2. See the options for required respirator from Column 2 of Table B.

3. See additional measures required for the planned work in Column 3 of Table B

The classification of typical lead-containing construction tasks is based on presumed airborne concentrations obtained from the U.S. Occupational Safety and Health Administration (OSHA), the Ontario Ministry of Labour, and published research studies. The classification of Type 1, Type 2, or Type 3 operations are grouped based on the following concentrations of airborne lead:

### Table A – presumed exposure levels

TYPE 1 OPERATIONS	TYPE 2 OPERATIONS		TYPE 3 OPERATIONS	
	Type 2a	Type 2b	Type 3a	Type 3b
< 0.05 mg/m <sup>3</sup>	> 0.05 to 0.50 mg/m <sup>3</sup>	> 0.50 to 1.25 mg/m <sup>3</sup>	> 1.25 to 2.50 mg/m <sup>3</sup>	> 2.50 mg/m <sup>3</sup>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# LEAD - Type 1, 2 & 3 Operations

**Table B – Permissible Operations and Required Respirators**

OPERATIONS	REQUIRED RESPIRATOR	OTHER MEASURES & PROCEDURES
<b>TYPE 1</b>		
<ul style="list-style-type: none"> <li>• Application of lead-containing coatings with a brush or roller.</li> <li>• Removal of lead-containing coatings with a chemical gel or paste and fibrous laminated cloth wrap.</li> <li>• Removal of lead-containing coatings or materials using a power tool that has an effective dust collection system equipped with a HEPA filter.</li> <li>• Installation or removal of lead-containing sheet metal.</li> <li>• Installation or removal of lead-containing packing, babbitt or similar material</li> <li>• Removal of lead-containing coatings or materials using non-powered hand-held tools, other than manual scraping or sanding.</li> <li>• Soldering.</li> </ul>	<p>Respirators should not be necessary if general procedures listed in Section 6.1 of the Guideline are followed and if the levels of lead in air are less than 0.05 mg/m<sup>3</sup>. However, if the worker wishes to use a respirator, a half-mask particulate respirator with N-, R- or P-series filter, and 95, 99 or 100% efficiency should be provided.</p>	<ul style="list-style-type: none"> <li>• Washing facilities consisting of wash basin, water, soap and towels should be provided and workers should use these washing facilities before eating, drinking, smoking or leaving the project;</li> <li>• Workers should not eat, drink, chew gum or smoke in the work area;</li> <li>• Dust and waste should be cleaned up at regular intervals and placed in a container that is:               <ul style="list-style-type: none"> <li>- dust tight</li> <li>- identified as containing lead waste</li> <li>- cleaned with a damp cloth or a vacuum equipped with a HEPA filter immediately before being removed from the work area</li> <li>- removed from the workplace frequently and at regular intervals;</li> </ul> </li> <li>• Drop sheets should be used below all lead operations which produce or may produce dust, chips, or debris containing lead;</li> <li>• Cleanup after each operation is encouraged to prevent lead contamination and exposure to lead;</li> <li>• Work area should be inspected at least daily to ensure that the work area is clean;</li> <li>• Compressed air or dry sweeping should not be used to clean up any lead-containing dust or waste from a work area or from clothing.</li> </ul>

<b>JH&amp;SC Review:</b>	<b>Approved By:</b>	<b>Date Created:</b>	<b>Date of Last Review:</b>	<b>Rev. No.</b>
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# LEAD - Type 1, 2 & 3 Operations

**Table B–Permissible Operations and Required Respirators** *continued*

OPERATIONS	REQUIRED RESPIRATOR	OTHER MEASURES & PROCEDURES
<b>TYPE 2</b>		
<b>TYPE 2a</b>		
<ul style="list-style-type: none"> <li>Welding or high temperature cutting of lead-containing coatings or materials outdoors. This operation is considered a Type 2a operation only if it is short-term, not repeated, and if the material has been stripped prior to welding or high temperature cutting.</li> <li>Removal of lead-containing coatings or materials by scraping or sanding using non-powered hand tools</li> <li>Manual demolition of lead-painted plaster walls or building components by striking a wall with a sledge hammer or similar tool</li> </ul>	Half-mask particulate respirator with N-, R-, or P-series filter and 95, 99 or 100 percent efficiency.	<b>(In addition to Type 1 measures and procedures.)</b> <ul style="list-style-type: none"> <li>Signs should be posted in sufficient numbers to warn of the lead hazard. There should be a sign, at least, at each entrance to the work area. The signs should display the following information in large, clearly visible letters:               <ul style="list-style-type: none"> <li>There is a lead dust, fume or mist hazard.</li> <li>Access to the work area is restricted to authorized persons.</li> <li>Respirators must be worn in the work area.</li> </ul> </li> <li>Suitable protective clothing and equipment should be worn by every worker who enters the work area (refer to Section 4.3 of the guideline).</li> </ul>
<b>TYPE 2b</b>		
<ul style="list-style-type: none"> <li>Spray application of lead-containing coatings.</li> </ul>	Powered air purifying respirator equipped with a hood or helmet, and a high efficiency filter. OR Supplied air respirator equipped with a hood or helmet and operated in a continuous flow mode.	

<b>JH&amp;SC Review:</b>	<b>Approved By:</b>	<b>Date Created:</b>	<b>Date of Last Review:</b>	<b>Rev. No.</b>
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# LEAD - Type 1, 2 & 3 Operations

**Table B—Permissible Operations and Required Respirators** *continued*

OPERATIONS	REQUIRED RESPIRATOR	OTHER MEASURES & PROCEDURES
<b>TYPE 3</b>		
<b>TYPE 3a</b>		
<ul style="list-style-type: none"> <li>Welding or high temperature cutting of lead-containing coatings or materials indoors or in a confined space.</li> <li>Burning of a surface containing lead.</li> <li>Dry removal of lead-containing mortar using an electric or pneumatic cutting device.</li> <li>Removal of lead-containing coatings or materials using power tools without an effective dust collection system equipped with a HEPA filter.</li> <li>Removal or repair of a ventilation system used for controlling lead exposure.</li> <li>Demolition or cleanup of a facility where lead-containing products were manufactured.</li> <li>An operation that may expose a worker to lead dust, fume or mist that is not a Type 1, Type 2, or Type 3b operation.</li> </ul>	<p>Full-facepiece air-purifying respirator equipped with N-, R-, or P-series filter and 100% efficiency.</p> <p style="text-align: center;">OR</p> <p>Tight-fitting PAPR with a high efficiency particulate filter.</p> <p style="text-align: center;">OR</p> <p>Half-mask or full-facepiece supplied air respirator operated in a continuous flow mode.</p> <p style="text-align: center;">OR</p> <p>Half-mask supplied air respirator operated in pressure-demand or other positive-pressure mode.</p>	<p><b>(In addition to Type 1 and Type 2 measures and procedures.)</b></p> <ul style="list-style-type: none"> <li>For Type 3a operations conducted indoors or outdoors, enclosures should be provided in the form of barriers, partial enclosures, or full enclosures.</li> <li>For Type 3b operations conducted indoors, full enclosures should be provided.</li> <li>With the exception of dry abrasive blasting conducted outdoors, enclosures provided for all other Type 3b operations conducted outdoors should be in the form of barriers, partial enclosures, or full enclosures. For dry abrasive blasting outdoors, full enclosures should be provided.</li> <li>Where there is an enclosure, general mechanical ventilation should be provided.</li> <li>A decontamination facility (refer to 6.4.3 of the guideline) should be made available for workers carrying out the following operations:               <ul style="list-style-type: none"> <li>- abrasive blasting of lead-containing coatings or materials</li> <li>- the removal of lead-containing coatings or materials using power tools without an effective dust collection system equipped with a HEPA filter</li> <li>- removal of lead-containing dust using an air mist extraction system</li> <li>- demolition or cleanup of a facility where lead-containing products were manufactured.</li> </ul> </li> <li>When abrasive blasting is finished, dust and waste should be cleaned up and removed by vacuuming with a HEPA filter equipped vacuum, wet sweeping and/or wet shovelling.</li> <li>Where a dust generating operation is carried out, local exhaust ventilation should be provided to remove dust at the source. Wet methods should also be incorporated in the operation to reduce dust generation.</li> </ul>
<b>TYPE 3b</b>		
<ul style="list-style-type: none"> <li>Abrasive blasting of lead-containing coatings or materials.</li> </ul>	<p>Type CE abrasive-blast supplied air respirator operated in a positive-pressure mode with a tight-fitting half-mask facepiece.</p> <p>Type CE abrasive-blast supplied air respirator operated in a pressure-demand or positive pressure mode with a tight-fitting full-facepiece</p>	
<ul style="list-style-type: none"> <li>Removal of lead-containing dust using an air mist extraction system</li> </ul>	<p>Supplied air respirator equipped with a tight-fitting half-mask or full-facepiece and operated in pressure demand or positive pressure mode.</p>	

<b>JH&amp;SC Review:</b>	<b>Approved By:</b>	<b>Date Created:</b>	<b>Date of Last Review:</b>	<b>Rev. No.</b>
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Silica – Type 1, 2 & 3 Operations

Potential Hazards Present	Required Safety Devices: * may be required based on risk – see FLHA form	
Inhalation of Silica dust <ul style="list-style-type: none"> <li>Lung Cancer</li> <li>Acute Silicosis</li> <li>Chronic Silicosis</li> <li>Accelerated Silicosis</li> </ul>	 <b>Safety Boots*</b>	 <b>Respiratory Protection</b>
	 <b>Disposable coveralls</b>	 <b>Hard Hats*</b>
	 <b>Safety glasses*</b>	 <b>Gloves*</b>

## Required Materials & Equipment

- Rip proof poly sheeting
- 2" or 3" tape
- Spray glue
- Lumber for construction of temporary walls and decontamination units
- Temporary lights
- Portable shower with water heater
- High Efficiency Particulate Air (HEPA) negative air unit
- HEPA vacuum
- Water amending agent

## Procedure

<b>Before You Start</b>	<ol style="list-style-type: none"> <li>1. Some commonly used construction materials containing silica include:             <ul style="list-style-type: none"> <li>Abrasive used in media blasting operation</li> <li>Brick, refractory brick</li> <li>Concrete, concrete block, cement, mortar</li> <li>Granite, sandstone, quartzite, slate</li> <li>Gunite/shotcrete</li> <li>Mineral deposits</li> <li>Rock and stone</li> <li>Sand, fill dirt, top soil</li> <li>Asphalt containing rock or stone</li> </ul> </li> </ol>
-------------------------	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Silica – Type 1, 2 & 3 Operations

	<p>Activities of concern where silica is present include:</p> <ul style="list-style-type: none"> <li>• Chipping, hammering and drilling of rock</li> <li>• Crushing, loading, hauling, and dumping of rock</li> <li>• Sawing, hammering, drilling, grinding, and chipping of concrete or masonry structures</li> <li>• Demolition of concrete and masonry structures</li> <li>• Dry sweeping or pressurized air blowing of concrete, rock, sand or dust</li> <li>• Road construction</li> <li>• Sweeping, cleaning and dismantling equipment involved with silica containing materials</li> <li>• Tunneling, excavation, and earth moving of soils with high silica concentration</li> </ul> <p>Review the owner’s designated substance survey (DSS) to determine what Silica containing materials are present and identify the location(s).</p> <p>Do not disturb Silica containing materials, unless you are trained, and all applicable safe work procedures have been followed.</p> <p>Workers must not be exposed to an airborne concentration of Silica that exceeds its occupational exposure limit (crystalline silica 0.05 mg/m<sup>3</sup>, quartz and Tripoli 0.10mg/m<sup>3</sup>). If workers are likely to be overexposed during work at a project, the workers involved will be offered medical surveillance.</p> <p>2. Determine what type of Silica containing products are present at the project:</p> <ul style="list-style-type: none"> <li>• Naturally occurring in stone, soil or sand</li> <li>• Contained in a blended building material such as mortar, concrete</li> </ul> <p>3. Evaluate what activities are required and what work methods will be employed in order to determine what precautions are required for the operation being conducted (type 1, 2, 3 criteria Guideline Silica in Construction in Ontario is located in the appendices of this procedure)</p> <p>4. Ensure that personnel have the appropriate training:</p> <ul style="list-style-type: none"> <li>• WHMIS training</li> <li>• The hazards of silica, including health effects and symptom recognition</li> <li>• The recognition of typical operations containing silica</li> </ul>
--	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Silica – Type 1, 2 & 3 Operations

	<ul style="list-style-type: none"> <li>• Personal hygiene, respirator requirements, and work measures and procedures</li> <li>• The use, care, maintenance, cleaning and disposal of personal respiratory protective equipment</li> </ul> <p>5. Workers that are offered the option of participating in a <b>voluntary</b> medical surveillance program may opt out of this program. A surveillance program is recommended for workers that will be working where airborne Silica exposure takes place. The surveillance programs includes:</p> <ul style="list-style-type: none"> <li>• Pre-placement medical exams</li> <li>• Clinical tests – chest x-ray and pulmonary function test at least every 2 years</li> <li>• Periodic medical exams</li> <li>• Health education</li> <li>• Record keeping</li> </ul>
<p><b>During Your Work</b></p>	<p><b><u>Pre-Abatement Work</u></b></p> <ol style="list-style-type: none"> <li>1. Isolate the work area with poly sheeting by constructing an enclosure suitable for the operation being conducted (type 1, 2, 3) and post Silica hazard warning signs.</li> <li>2. Make safe any electrical services in the work area</li> <li>3. Block and disable HVAC systems that feed or pass through the work area\</li> <li>4. Conduct efficiency testing on all HEPA equipment (vacuum, negative air unit)</li> <li>5. Install HEPA negative air units for type 3 operations, unless the building will be demolished post abatement.             <ul style="list-style-type: none"> <li>• Arrange the units with air discharged to the outdoors whenever possible.</li> <li>• Use a manometer to measure air pressure within the enclosure relative to outside the enclosure</li> <li>• Add neg.-air units until a negative pressure differential within the enclosure is achieved</li> </ul> </li> <li>6. Install worker decontamination facilities suitable for the operation being conducted</li> </ol>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Silica – Type 1, 2 & 3 Operations

	<ul style="list-style-type: none"> <li>• Type 1 wash station and change room</li> <li>• Type 2 wash station and change room</li> <li>• Type 3 (3 chambers) dirty room, wash station or shower (hot/cold running water) and change room</li> </ul> <p>7. Protective clothing must be worn by every worker who enters the work area for Type 2 and 3 operations,</p> <ul style="list-style-type: none"> <li>• Protective clothing must be made of a material that does not readily retain or permit penetration of Silica dust.</li> <li>• Must consist of head covering and full body covering that fits snugly at the ankles, wrists and neck, in order to prevent Silica dust from reaching under garments and skin under the protective clothing</li> <li>• must be repaired or replaced if torn.</li> </ul> <p>8. Respirators must be selected that are suitable for the operation being conducted. See Appendix</p> <p>9. Respiratory protective equipment must be worn when the airborne concentration of Silica cannot be reduced below its occupational exposure limit</p> <p><b><u>Abatement Work</u></b></p> <ol style="list-style-type: none"> <li>1. Any person entering the enclosure must wear the appropriate PPE suitable for the operation being performed (type 1, 2, 3).</li> <li>2. Each worker that leaves the enclosure FOR ANY REASON, must go through a personal decontamination process as follows: <ul style="list-style-type: none"> <li>• Bulk decontamination of their PPE by wiping or HEPA vacuuming off dust</li> <li>• Enter dirty room and remove footwear and clothing</li> <li>• Dispose of clothing as waste in supplied disposal bag in the dirty room</li> <li>• Enter the wash facility/shower while still wearing respirator.</li> <li>• Place filter cap or tape over the respirator filter and then remove respirator and wash respirator.</li> <li>• Complete personal wash of hands face or full shower for type III operations</li> </ul> </li> </ol>
--	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Silica – Type 1, 2 & 3 Operations

	<ul style="list-style-type: none"> <li>• Proceed to clean room and change into street clothes</li> </ul> <ol style="list-style-type: none"> <li>3. In order to minimize the generation and spread of dust, apply water whenever practical during any type 2/3 operations.</li> <li>4. In areas where dust will be re-disturbed after the initial work, clean up of resulting debris and dust should be done promptly as work progresses, leaving the work area clear of debris each shift. Use wet sweeping or HEPA equipped vacuum for clean-up.</li> <li>5. Inspect the dust barrier enclosure daily or more frequently if necessary to ensure the integrity of the enclosure and negative air pressure in type III operations.</li> <li>6. In areas that will be re-occupied, clean all surfaces of the work area to a dust free condition by using HEPA vacuums, mopping, and wet wiping.</li> <li>7. Apply a fibre/dust lockdown agent to capture any airborne dust that might settle after cleaning and allow 24hrs for lockdown to dry.</li> <li>8. Perform a final visual clearance inspection.             <ul style="list-style-type: none"> <li>• Supervisors must conduct a thorough inspection to determine that cleaning and lockdown has achieved a dust free condition on all surfaces within the enclosure.</li> </ul> </li> <li>9. Tear down the dust barrier enclosure with workers wearing PPE suitable for type 2 operations.</li> <li>10. All enclosure sheets, drop sheets, cloths/mops, used PPE and vacuum bags/filters must be disposed of as regular waste.</li> </ol>
<b>After You Finish</b>	<ol style="list-style-type: none"> <li>1. Silica containing materials do not require any special disposal. Additional considerations may be required if other contaminants are present such as LEAD or high PH readings.</li> </ol>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Silica – Type 1, 2 & 3 Operations

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Ontario Occupational Health and Safety Act
- Ontario Reg. 490/09 Designated Substance
- Ontario Reg. 213/91 Construction Projects
- Ontario Reg. 347 General Waste Management
- MOL: Silica On Construction Projects

This Safe Work Procedure must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Silica – Type 1, 2 & 3 Operations

### Permissible Operations and Selection Criteria for PPE

Instruction: 1. Select the appropriate work description for the work planned from Column 1 of Table B. The presumed exposure level from Table A is never exceeded by the permissible operations in Table B.

2. See the options for required respirator from Column 2 of Table B.

The classification of typical silica-containing construction tasks is based on available and published exposure data. Type 1, Type 2, and Type 3 operations, are based on the following airborne concentrations of respirable crystalline silica in the form of cristobalite, tridymite, quartz, and tripoli:

Table A – presumed exposure levels

	TYPE 1 OPERATIONS	TYPE 2 OPERATIONS	TYPE 3 OPERATIONS
<b>Cristobalite and Tridymite</b>	> 0.05 to 0.50 mg/m <sup>3</sup>	> 0.50 to 2.50 mg/m <sup>3</sup>	> 2.5 mg/m <sup>3</sup>
<b>Quartz and Tripoli</b>	> 0.10 to 1.0 mg/m <sup>3</sup>	> 1.0 to 5.0 mg/m <sup>3</sup>	> 5.0 mg/m <sup>3</sup>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Silica – Type 1, 2 & 3 Operations

**Table B**

**Permissible Operations and Required Respirators**

Operations	Required Respirator
<b>Type 1</b> (> 0.05 to 0.50 mg/m <sup>3</sup> of silica in the form of cristobalite and tridymite) (> 0.10 to 1.0 mg/m <sup>3</sup> of silica in the form of quartz and tripoli)	<b>NIOSH APF = 10</b>
<ul style="list-style-type: none"> <li>• The drilling of holes in concrete or rock that is not part of a tunnelling operation or road construction.</li> <li>• Milling of asphalt from concrete highway pavement.</li> <li>• Charging mixers and hoppers with silica sand (sand consisting of at least 95 per cent silica) or silica flour (finely ground sand consisting of at least 95 per cent silica).</li> <li>• Any other operation at a project that requires the handling of silica-containing material in a way that may result in a worker being exposed to airborne silica.</li> <li>• Entry into a dry mortar removal or abrasive blasting area while airborne dust is visible for less than 15 minutes for inspection and/or sampling.</li> <li>• Working within 25 metres of an area where compressed air is being used to remove silica-containing dust outdoors.</li> </ul>	Half-mask particulate respirator with N-, R-, or P-series filter and 95, 99 or 100 per cent efficiency.

<b>JH&amp;SC Review:</b>	<b>Approved By:</b>	<b>Date Created:</b>	<b>Date of Last Review:</b>	<b>Rev. No.</b>
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Silica – Type 1, 2 & 3 Operations

**Table B**

**Permissible Operations and Required Respirators continued**

<b>Type 2</b> (> 0.50 to 2.5 mg/m <sup>3</sup> of silica in the form of cristobalite and tridymite) (> 1.0 to 5.0 mg/m <sup>3</sup> of silica in the form of quartz and tripoli)	<b>NIOSH APF = 50</b>
<ul style="list-style-type: none"> <li>• Removal of silica containing refractory materials with a jackhammer.</li> <li>• The drilling of holes in concrete or rock that is part of a tunnelling operation or road construction.</li> <li>• The use of a power tool to cut, grind, or polish concrete, masonry, terrazzo or refractory materials.</li> <li>• The use of a power tool to remove silica-containing materials.</li> <li>• The use of a power tool indoors to chip or break and remove concrete, masonry, stone, terrazzo or refractory materials.</li> <li>• Tunnelling (operation of the tunnel boring machine, tunnel drilling, tunnel mesh installation).</li> <li>• Tuckpointing and surface grinding.</li> <li>• Dry method dust clean-up from abrasive blasting operations.</li> <li>• Dry mortar removal with an electric or pneumatic cutting device.</li> <li>• The use of compressed air outdoors for removing silica dust.</li> <li>• Entry into area where abrasive blasting is being carried out for more than 15 minutes.</li> </ul>	<p>Full-facepiece air-purifying respirator with any 100-series particulate filter.</p> <p>Tight-fitting powered air-purifying respirator with any 100-series particulate filter.</p> <p>Full-facepiece supplied-air respirator operated in demand mode.</p> <p>Half-mask or full-facepiece supplied air respirator operated in continuous-flow mode.</p>
<b>Type 3</b> (> 2.5 mg/m <sup>3</sup> of silica in the form of cristobalite and tridymite) (> 5.0 mg/m <sup>3</sup> of silica in the form of quartz and tripoli)	<b>NIOSH APF ≥ 1000</b>
<ul style="list-style-type: none"> <li>• Abrasive blasting with an abrasive that contains ≥ 1 per cent silica.</li> <li>• Abrasive blasting of a material that contains ≥ 1 per cent silica.</li> </ul>	<p>Type CE abrasive-blast supplied air respirator operated in a positive-pressure mode with a tight-fitting half-mask facepiece.</p> <p>Type CE abrasive-blast supplied air respirator operated in a pressure-demand or positive pressure mode with a tight-fitting full-facepiece.</p>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



# Silica – Type 1, 2 & 3 Operations

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	November 15 <sup>th</sup> 2022	1



Safe Work Procedure

# Mould – Level 1, 2 & 3 Operations

Safe Work Procedure Number SWP-018

Potential Hazards Present	Required Safety Devices: * may be required based on risk – see FLHA form	
<ul style="list-style-type: none"> <li>• Skin contact with or Inhalation of Mould particles (spores, fragments)</li> <li>• Inhalation of Mould metabolites (gases)</li> </ul>		
	<b>Safety Boots*</b>	<b>Respiratory Protection</b>
		
	<b>Disposable coveralls</b>	<b>Hard Hats*</b>
		
	<b>Safety glasses*</b>	<b>Gloves</b>

## Required Materials & Equipment

- Rip proof poly sheeting
- 2” or 3” tape
- Spray glue
- Lumber for construction of temporary walls and decontamination units
- Temporary lights
- Heavy duty clear disposal bags
- Portable shower with water heater
- High Efficiency Particulate Air (HEPA) negative air unit
- HEPA vacuum
- Disinfectant/Antimicrobial agent

## Procedure

<p><b>Before You Start</b></p>	<p>1. Mould can be found in any industrial or residential building in 2 distinct ways:</p> <ul style="list-style-type: none"> <li>• Dormant/inactive on any surfaces, and in soils. This is a non-hazardous condition.</li> <li>• Actively growing and metabolizing (producing toxins) due to excessive moisture such as high humidity/condensation or from water leaks</li> </ul> <p>Mould hazards are increased when Mould is disturbed and made airborne in high concentrations. The hazard level is increased proportionally to the quantity of contamination present and the species of Mould present.</p> <p>Review the owner’s designated substance survey (DSS) and visually inspect to determine if Mould present and identify the location(s).</p>
--------------------------------	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	April 9, 2024	2



# Mould – Level 1, 2 & 3 Operations

	<p>Workers must not be exposed to an airborne concentration of Mould that could cause illness. Do not disturb Mould unless you are trained, and all applicable safe work procedures have been followed.</p> <ol style="list-style-type: none"> <li>2. Determine what type of material has been contaminated by Mould:             <ul style="list-style-type: none"> <li>- soft/porous material such as carpet, drywall, ceiling tiles</li> <li>- solid but porous material such as wood</li> <li>- hard surface contamination such as concrete that is painted or unpainted</li> </ul> </li> <li>3. Evaluate what quantity of contamination is present in order to determine what precautions are required for the operation being conducted (Level 1, 2, 3 criteria from Environmental Abatement Council of Ontario and Canadian Construction Association guidelines on Mould located in the appendices of this procedure)</li> <li>4. Ensure that personnel have the appropriate training:             <ul style="list-style-type: none"> <li>• WHMIS training</li> <li>• The hazards of Mould and fitness to work in Mould environment (personal health risk factors)</li> <li>• Abatement practices and clean up</li> <li>• Respirator fitting and use</li> <li>• Personal hygiene</li> </ul> </li> </ol>
--	--

<b>During Your Work</b>	<p><b><u>Pre-Abatement Work</u></b></p> <ol style="list-style-type: none"> <li>1. Isolate the work area with poly sheeting by constructing an enclosure suitable for the operation being conducted (Level 1, 2, 3 criteria from Environmental Abatement Council of Ontario and Canadian Construction Association guidelines) and post Mould hazard warning signs.</li> <li>2. Make safe any electrical services in the work area</li> <li>3. Block and disable HVAC systems that feed or pass through the work area.</li> <li>4. Conduct efficiency testing on all HEPA equipment (vacuum, negative air unit)</li> <li>5. Install HEPA negative air units for Level 2 and 3 operations, unless the building will be demolished post abatement.</li> </ol>
-------------------------	---

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	April 9, 2024	2



# Mould – Level 1, 2 & 3 Operations

	<ul style="list-style-type: none"> <li>• Arrange the units with air discharged to the outdoors whenever possible.</li> <li>• Use a manometer to measure air pressure within the enclosure relative to outside the enclosure</li> <li>• Add neg.-air units until a negative pressure differential within the enclosure is achieved of 0.02 inches of water.</li> </ul> <p>6. Install worker decontamination facilities suitable for the operation being conducted</p> <ul style="list-style-type: none"> <li>• Level 1 wash station and change room</li> <li>• Level 2 wash station and change room</li> <li>• Level 3 (3 chambers) dirty room, shower (hot/cold running water) and change room</li> </ul> <p>7. Protective clothing must be worn by every worker who enters the work area,</p> <ul style="list-style-type: none"> <li>• Protective clothing must be made of a material that does not readily retain or permit penetration of Mould dusts</li> <li>• Must consist of head covering and full body covering that fits snugly at the ankles, wrists and neck, in order to prevent Mould dust from reaching under garments and skin under the protective clothing</li> <li>• must be repaired or replaced if torn.</li> </ul> <p>8. Respirators must be selected that are suitable for the operation being conducted. See Appendix</p> <p>9. Respiratory protective equipment must be worn.</p> <p><b><u>Abatement Work</u></b></p> <p>1. Any person entering the enclosure must wear the appropriate PPE suitable for the operation being performed (Level 1, 2, 3 criteria from Environmental Abatement Council of Ontario and Canadian Construction Association guidelines).</p> <p>2. Each worker that leaves the enclosure FOR ANY REASON, must go through a personal decontamination process as follows:</p> <ul style="list-style-type: none"> <li>• Bulk decontamination of their PPE by wiping or HEPA vacuuming off dust</li> <li>• Enter dirty room and remove footwear and clothing</li> </ul>
--	---

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	April 9, 2024	2



# Mould – Level 1, 2 & 3 Operations

	<ul style="list-style-type: none"> <li>• Dispose of clothing as waste in supplied disposal bag in the dirty room</li> <li>• Enter the wash facility/shower while still wearing respirator.</li> <li>• Place filter cap or tape over the respirator filter and then remove respirator and wash respirator.</li> <li>• Complete personal wash of hands face or full shower for Level 3 operations</li> <li>• Proceed to clean room and change into street clothes</li> </ul> <p>3. Place drop sheets below any Mould that will be disturbed.</p> <p>4. Prior to disturbing any Mould apply a mist of water to Mould to suppress and minimize dust release.</p> <p>5. Remove Mould and immediately place in disposal bag/container.</p> <p>6. Clean up resulting debris and dust promptly as work progresses leaving the work area clear of debris each shift. Use wet sweeping or HEPA equipped vacuum for clean-up.</p> <p>7. Inspect the enclosure daily or more frequently if necessary to ensure the integrity of the enclosure and negative air pressure in type 3 operations (refer to inspection checklist and neg-air log sheet)</p> <p>8. Package waste in with proper labels.</p> <p>9. Perform an initial completion inspection.</p> <ul style="list-style-type: none"> <li>• Supervisors must conduct a thorough inspection to determine that all materials identified in the owner’s designated substance survey that are part of the scope of work have been removed.</li> </ul> <p>10. Clean all surfaces to a dust free condition by HEPA vacuuming, wet wiping or mopping.</p> <p>11. Apply a disinfectant/anti-microbial agent following the manufacturer’s instructions.</p> <p>12. Perform a final visual clearance inspection.</p>
--	---

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	April 9, 2024	2



# Mould – Level 1, 2 & 3 Operations

	<ul style="list-style-type: none"> <li>• Supervisors must conduct a thorough inspection to determine that cleaning has achieved a dust free condition on all surfaces within the enclosure.</li> </ul> <p>13. For Level 3 operations, an air clearance test may be requested by the owner if the building will be reoccupied.</p> <ul style="list-style-type: none"> <li>• This is not required in buildings that will be demolished post abatement.</li> </ul> <p>14. Tear down the enclosure with workers wearing PPE suitable for Level 2 operations.</p> <p>15. All enclosure sheets, drop sheets, cloths/mops, used PPE and vacuum bags/filters must be disposed of as Mould waste.</p>
<b>After You Finish</b>	<ol style="list-style-type: none"> <li>1. Place waste in a disposal bin and transport waste to landfill as per O.Reg.347 General – Waste Management.</li> <li>2. Although Mould waste is a regular non-hazardous waste, it should never be sent to a transfer station, it must go directly to landfill.</li> <li>3. Ensure the selected waste hauler has appropriate Ministry of Environment Certificate of Approval/ Environmental Compliance Approval to haul waste.</li> <li>4. Supervisor must complete a declaration letter after all removals and disposal complete.</li> </ol>

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- Ontario Occupational Health and Safety Act
- Ontario Reg. 490/09 Designated Substance
- Ontario Reg. 213/91 Construction Projects
- Ontario Reg. 347 General Waste Management
- Federal Transportation of Dangerous Goods Act and Associated Regulation
- EACO: Mould Abatement Guidelines Edition 3 (2015)
- Canadian Construction Association Document 82 : Mould guidelines for the Canadian construction industry

This Safe Work Procedure must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	April 9, 2024	2



# Mould – Level 1, 2 & 3 Operations

## Operations and Selection Criteria for PPE and Measures

Instruction:

1. Select the appropriate work description for the work planned from Column 1 of Table A.
2. See the options for required respirator from Column 2 of Table A.
3. See additional measures required for the planned work in Column 3 of Table A

Table A – Operations and Required Respirators

Operation	Type of Respirator	Additional Measures
Level 1		
Removal or clean up of Mould impacted area of less than 1m <sup>2</sup> or 10ft <sup>2</sup>	half face piece air-purifying Respirator fitted with replaceable filters (N95 minimum) or a Filtering Facepiece Respirator (N95 minimum)	<p>Wear appropriate gloves and full-body dust-impervious coveralls with attached hoods. Secure the coveralls tight at the ankles and wrists. Turn off HVAC systems where possible and seal over any diffusers immediately adjacent to the work area. Where possible, place a drop sheet below the Mouldy materials.</p> <p>Dust Suppression methods should be used where possible, prior to disturbance of the Mouldy materials. Tape a section of plastic sheeting or duct tape over the Mouldy material, or if this is not feasible, lightly mist the Mouldy material with water.</p> <p>Remove any Porous substrate materials (ceiling tiles, drywall, etc.) to a point beyond the immediate areas of visible contamination, for a minimum distance of 30 cm in all directions. Clean the work area and dispose of the waste.</p>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	April 9, 2024	2



# Mould – Level 1, 2 & 3 Operations

Operation	Type of Respirator	Additional Measures
Level 2		
<p>Removal or clean up of Mould impacted area from 1-10m<sup>2</sup> or 10-100ft<sup>2</sup></p>	<p>elastomeric half face piece air-purifying Respirator fitted with P100 Series Filter cartridges with Organic filters for odours.</p>	<p>Workers shall wear disposable boot covers or separate work boots that can be effectively HEPA vacuumed or wiped clean prior to removal from the work area. Turn-off HVAC systems where possible and seal over any supply and return openings immediately adjacent to the work area. Objective of this engineering control is to maintain negative pressure and prevent the distribution of mould spores and dust from the work area. The Abatement area must be secured and access restricted. Isolate the work area with an enclosure constructed of fibre-reinforced Polyethylene Sheeting or 6 mil Polyethylene Sheeting, taped and supported as required. Provide a temporary roof where an existing ceiling does not complete the temporary enclosure. The Project authority may require a single chamber decontamination/change room. A Competent Supervisor or project authority must inspect the work area for defects in the enclosure, barriers and change room, at the beginning of every shift and at the end of every shift. Records of the inspections should be generated and maintained. Install signs warning of the exposure hazard. Suggested wording: CAUTION, MOULD EXPOSURE, WEAR ASSIGNED PROTECTIVE EQUIPMENT, AUTHORIZED</p>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	April 9, 2024	2



# Mould – Level 1, 2 & 3 Operations

	<p>PERSONNEL ONLY. Provide continuous Negative Pressure within the enclosure by drawing air from the work area and exhausting it out of the enclosure, either by use of a HEPA vacuum or a portable HEPA-filtered exhaust fan. Provide a minimum Negative Pressure of 5 Pascals (0.02 inches of water column) and at least 4 air changes per hour. Discharge the filtered air outside the building and away from persons wherever possible, and if this is not possible, consider on-site leak testing of the HEPA filtered equipment. Refer to the EACO DOP/PAO Testing Procedure Guideline 2013. Negative Pressure must be maintained until the completion of all Contaminated Work. Remove any Porous substrate materials (ceiling tiles, drywall, etc.) to a point beyond the immediate areas of visible contamination, for a minimum distance of 30 cm in all directions. Clean the work area and dispose of the waste.</p> <p>Before exiting the work area, workers shall fully wipe or vacuum clean all footwear, coveralls and other personal protective equipment and remove and dispose of protective equipment not for re-use. Workers shall then complete personal cleaning.</p>
--	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	April 9, 2024	2



# Mould – Level 1, 2 & 3 Operations

Operation	Type of Respirator	Additional Measures
Level 3		
<p>Removal or clean up of Mould impacted area greater than 10m<sup>2</sup> or 100f<sup>2</sup></p>	<p>tight-fitting full face piece Powered Air Purifying Respirator with high efficiency particulate filters or a non-powered full face piece air purifying Respirator fitted with P100 Series Filter cartridges with Organic filters for odours.</p>	<p>Provide a wash station consisting of at least a basin, fresh water, soap and toweling, in the clean change room. A shower for worker comfort may be provided, but is optional. When going into the Contaminated Work area the worker will don clean coveralls and a Respirator in the clean change room. Prior to exiting the Contaminated Work Area, the worker will use a HEPA vacuum in the work area to remove gross contamination from coveralls and boot covers (or separate dirty work boots). The worker will then enter the dirty change room where the dirty coveralls and boot covers are removed (to be used only once). Work boots used without boot covers will also be removed and stored in the dirty change room. The worker then proceeds to the clean change room to complete clean up. The wash station is to be used by each worker on leaving the work area to clean face and hands. A separate Waste Decontamination Facility, consisting of a double bagging room and a waste transfer room should be provided where large volumes of waste will be removed. Seal the waste into bags (or Polyethylene Sheeting sealed with tape) in the Contaminated Work area, and wipe the exterior of the bags or other containers. Transfer the waste to the double bagging room and place a second bag around</p>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	April 9, 2024	2



# Mould – Level 1, 2 & 3 Operations

bagged waste. Seal the second bag. Transfer the double-bagged waste into the waste transfer room for removal by workers entering from the outside of the decontamination facilities. Remove any Porous substrate materials (ceiling tiles, drywall, etc.) to a point beyond the immediate areas of visible contamination, for a minimum distance of 30 cm in all directions. Clean the work area and dispose of the waste. Clean tools and equipment such as vacuums, negative air units or any other items that were exposed during abatement.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	April 9, 2024	2



# Mould – Level 1, 2 & 3 Operations

		<p>An acceptable condition is indicated when:</p> <ol style="list-style-type: none"> <li>1. Concentrations of airborne fungal particles in the work area are not significantly elevated when compared to concentrations in the outdoor reference area; and</li> <li>2. The types of fungal particulate present in the work area do not significantly differ from those present in the reference area.</li> </ol> <p>Surface samples should show minimal or no Mould growth remaining at completion. Interpretations of sample results are subject to the professional judgment of the Health and Safety professional with experience performing microbial investigation and remediation.</p>
--	--	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	June 7, 2019	April 9, 2024	2



# COVID-19 Prevention

Potential Hazards Present	Required Safety Devices: * may be required based on activity risks or client requirements	
<p>As with most common illnesses, the workplace is susceptible to the spread of COVID-19 because of the proximity between workers, and the frequency of contact with shared surfaces and objects.</p> <p>COVID-19 spreads in a similar way to the flu: infected droplets may be deposited on surfaces and objects, and another person may touch contaminated surfaces or objects, and then touch their mouth, eyes or nose.</p> <p>Someone can also catch the virus by breathing in droplets of infected fluid if they do not maintain social distancing.</p>	 <b>Safety Boots*</b>	 <b>Respiratory Protection*</b>
	 <b>Disposable* coveralls</b>	 <b>Hard Hats*</b>
	 <b>Safety glasses*</b>	 <b>Gloves*</b>

## Required Materials & Equipment

- Cleaning supplies including spray bottle
- Surface disinfectant (medi-clean or equivalent)
- Hand sanitizer (alcohol wipes or gel)
- Wash facilities with soap and water
- Posting of this procedure, appropriate signage and information posters

## Procedure

<b>General</b>	<p>The best way to stop the spread of COVID-19 is to:</p> <ul style="list-style-type: none"> <li>• Get vaccinated and get your booster shot</li> <li>• wear a face covering or mask when you are in indoor spaces</li> <li>• Stay home if you feel unwell</li> <li>• Isolate if you have symptoms of covid-19</li> <li>• Continue to follow all public health measures</li> <li>• Take everyday actions such as:</li> </ul>
----------------	---

- Avoiding crowds and maintain physical distance (at least two metres) from people you do not live with
- Washing your hands often with soap and water or use alcohol-based hand sanitizer
- Sneezing and coughing into your sleeve
- Avoiding touching your eyes, nose or mouth
- Avoiding contact with people who are sick

**Illness Reporting and Isolation Requirements**

Symptoms of COVID-19 and its variants range from mild — like the flu and other common respiratory infections — to severe. If you feel sick, it’s important that you stay home or talk with a doctor, if necessary.

Completing a self-assessment will help you determine if you have the symptoms of COVID-19 and if you are required to isolate.

Symptoms of COVID 19 include:

- fever or chills
- cough
- shortness of breath
- decreased or loss of taste or smell
- two or more of:
  - runny nose or nasal congestion
  - headache
  - extreme fatigue
  - sore throat
  - muscle aches or joint pain
  - gastrointestinal symptoms (such as vomiting or diarrhea)

If you have symptoms of COVID-19

Notify your supervisor / Human Resources prior to coming to work, and you will be requested to:

Isolate for five days if you are:

- fully vaccinated and otherwise healthy
- Note: You can end isolation after five days only if you have no fever and your other symptoms have been improving for at least 24 hours (or 48 hours for nausea, vomiting or diarrhea), and all public health and safety measures, such as masking and physical distancing, are followed.

OR

Isolate for 10 days if you are

- not fully vaccinated or are immunocompromised

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	April 1 2020	November 15 <sup>th</sup> 2022	1

	<p>Personnel who live with a symptomatic person do not need to isolate, if any of the following applies:</p> <ul style="list-style-type: none"> <li>• you previously tested positive in the last 90 days and do not have symptoms</li> <li>• you are 18 years old or over and have received a COVID-19 booster dose</li> <li>• you are under 18 years old and are fully vaccinated</li> </ul> <p>Instead for 10 days after exposure you must:</p> <ul style="list-style-type: none"> <li>• self-monitor for symptoms</li> <li>• wear a mask and avoid activities where mask removal would be necessary</li> <li>• do not visit anyone who is at higher risk of illness, such as seniors, or any highest risk settings (unless the person previously tested positive in past 90 days)</li> </ul>
<p><b>Before You Start</b></p>	<p>All workers and visitors are required to self-assess that they are fit for work and are not displaying the COVID 19 symptoms listed above, on a daily basis prior to entering the workplace.</p> <p>Take time to disinfect and clean your work area prior to starting work in the morning, and after breaks.</p> <ul style="list-style-type: none"> <li>• Focus on high-touch areas like site trailers, door handles and hoists, lunchrooms and any equipment you may be touching.</li> <li>• Record the cleaning on the cleaning record form.</li> </ul>
<p><b>During Your Work</b></p>	<p><b>Practice Social Distancing</b></p> <p>Although capacity and social distancing restrictions may be lifted in certain jurisdictions, physical distance is still encouraged, and may be required on certain client sites.</p> <p>In order to obtain physical distancing on site or in the office, the following may be used:</p> <ul style="list-style-type: none"> <li>• stagger start times</li> <li>• stagger breaks</li> <li>• stagger lunches</li> <li>• limiting the potential for workers to gather, including personnel in material hoists and site trailers</li> <li>• limit the number of people who use elevators and hoists at one time</li> <li>• hold meetings in spaces large enough to allow physical distancing</li> <li>• limit unnecessary on-site contact between workers, and between workers and outside service providers, and encourage physical distancing in these areas</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	April 1 2020	November 15 <sup>th</sup> 2022	1

	<p><b>Masks and Personal Protective Equipment</b></p> <p>The use of respirators (e.g. N-95 respirators) are not recommended, except in healthcare settings when particular high-risk procedures are being performed or in other industries when respirators are routinely used.</p> <p>Wearing a mask is optional on our sites, but may be required on client sites and we must follow those conditions. If you use a mask, the use of a non-medical mask/facial covering is recommended.</p> <p>Nitrile or latex gloves are only recommended when workers will be in direct contact with an ill person, or a contaminated object or environment. Continue to use normal construction hand protection as required.</p> <p>PPE must be used correctly to prevent contamination when taking it on and off.</p> <ul style="list-style-type: none"> <li>• hand washing remains critical even when using PPE.</li> </ul>
<b>After You Finish</b>	<p>Wash / disinfect your hands thoroughly.</p> <p>Wash your clothes as soon as you get home.</p>
<b>Guidance Documents/ Standards/ Applicable Legislation/ Other:</b>	
<ul style="list-style-type: none"> <li>• Ontario Occupational Health and Safety Act</li> <li>• Ontario Reg. 213/91</li> <li>• <a href="#">Living with and Managing COVID19 - the Province of ON</a></li> <li>• <a href="#">Risk-informed decision-making guidelines for workplaces and businesses during the COVID-19 pandemic – Government of Canada</a></li> </ul>	
<p>This Safe Work Procedure must be reviewed any time the task, equipment, or materials change, and at minimum every three years.</p>	

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	April 1 2020	November 15 <sup>th</sup> 2022	1




# Daily Site Cleaning Record

<b>Date:</b>							
<b>Location/Site:</b>							
<b>Supervisor:</b>							
<b>AM:</b>	<b>Monday</b>	<b>Tuesday</b>	<b>Wednesday</b>	<b>Thursday</b>	<b>Friday</b>	<b>Saturday</b>	<b>Sunday</b>
Site Office							
Lunch/Break Room							
Equipment #1							
Equipment #2							
Equipment #3							
Equipment #4							
<b>PM:</b>							
Site Office							
Lunch/ Break Room							
Equipment #1							
Equipment #2							
Equipment #3							
Equipment #4							
<b>Any work areas noted above require cleaning /disinfecting daily Identify equipment being cleaned</b>							

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	April 1 2020	November 15 <sup>th</sup> 2022	1

# Protect against COVID-19

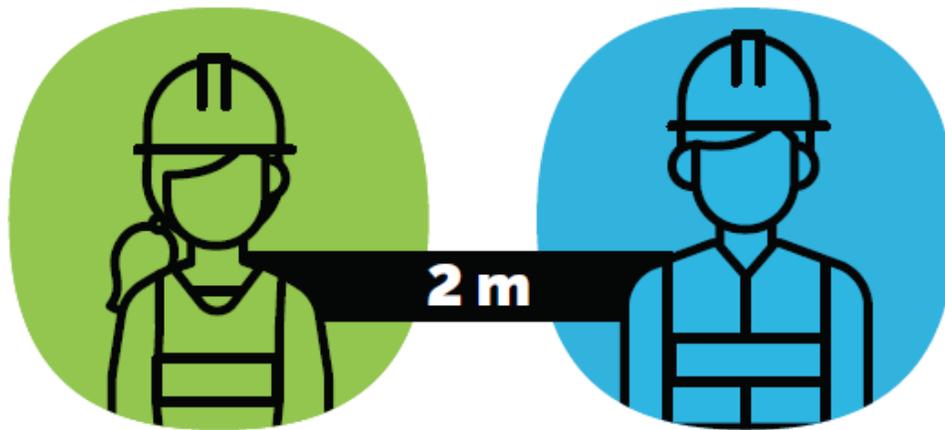

Practice physical distancing and stay 2 metres from other people.

**If you have symptoms,**  
take the self-assessment at [ontario.ca/coronavirus](https://ontario.ca/coronavirus).  
Or call your primary care provider  
or Telehealth Ontario at  
416-797-0000 (TTY: 416-797-0007)

For more information,  
visit [ontario.ca/coronavirus](https://ontario.ca/coronavirus)

Ontario 

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	April 1 2020	November 15 <sup>th</sup> 2022	1

# HELP REDUCE THE SPREAD OF COVID-19

TOGETHER, WE CAN TAKE THE FOLLOWING STEPS TO SLOW THE SPREAD OF COVID-19



follow the advice of your **local public health authority**



**wash your hands** often with soap and water for at least 20 seconds



use an alcohol-based hand sanitizer (at least 60% alcohol) or an **approved non-alcohol based hand sanitizer**, if soap and water are not available



try not to touch your eyes, nose or mouth



cough and sneeze into your sleeve and not your hands



avoid close contact with people who are sick and practice **physical distancing**



avoid non-essential community and cultural gatherings and keep a physical distance between each other (approximately 2 metres)

## SYMPTOMS

**Symptoms** of COVID-19 may be very mild or more serious and may take up to 14 days to appear after exposure to the virus. The most common symptoms include:



**FEVER**



**COUGH**



**DIFFICULTY BREATHING**

## IF YOU HAVE SYMPTOMS



**Isolate** at home to avoid spreading illness to others.



Avoid visits with older adults, elders, or those with medical conditions. They are at higher risk of developing serious illness.



Call ahead before you visit a health care professional or call your local public health authority.



If your symptoms get worse, contact your health care provider or public health authority right away, and follow their instructions.

## FOR INFORMATION ON COVID-19:

☎ 1-833-784-4397

@ [canada.ca/coronavirus](https://canada.ca/coronavirus)

Public Health Agency of Canada / Agence de la santé publique du Canada

Canada

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	April 1 2020	November 15 <sup>th</sup> 2022	1

# How to handwash


Lather hands for 15 seconds




1  
Wet hands with warm water.



2  
Apply soap.

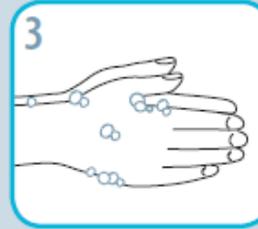

3  
Lather soap and rub hands palm to palm.

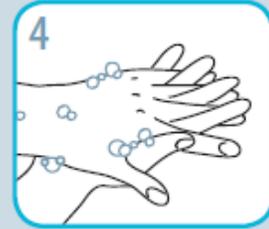

4  
Rub in between and around fingers.

Lather hands for 15 seconds



5  
Rub back of each hand with palm of other hand.



6  
Rub fingertips of each hand in opposite palm.



7  
Rub each thumb clasped in opposite hand.



8  
Rinse thoroughly under running water.



9  
Pat hands dry with paper towel.



10  
Turn off water using paper towel.



11  
Your hands are now safe.



JUST CLEAN  
YOUR HANDS

For more information, please contact [handhygiene@oahpp.ca](mailto:handhygiene@oahpp.ca) or visit [publichealthontario.ca/JCYH](http://publichealthontario.ca/JCYH)



Catalogue No. 011875 13M March 2006 © Queen's Printer for Ontario

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	April 1 2020	November 15 <sup>th</sup> 2022	1



Safe Work Practice

# Chemical and Biological Hazards

Safe Work Practice Number

SWP-020

Potential Hazards Present	Required Personal Protective Equipment * may be required based on risk			
<ul style="list-style-type: none"> <li>• Chemical Exposure               <ul style="list-style-type: none"> <li>○ Are present when a worker is exposed to any chemical preparation in the workplace in any form (solid, liquid or gas).</li> </ul> </li> <li>• Biological exposure               <ul style="list-style-type: none"> <li>○ Blood and other body fluids</li> <li>○ Fungi/mold</li> <li>○ Bacteria and viruses</li> <li>○ Plants</li> <li>○ Insect Bites</li> <li>○ Animal and bird droppings</li> </ul> </li> </ul>		<b>Safety Boots*</b>		<b>Gloves *</b>
		<b>Hard Hat*</b>		<b>Eye Protection*</b>
		<b>Hearing Protection*</b>		<b>High Visibility Clothing*</b>
		<b>Wash Station*</b>		<b>Skin Protection*</b>

DO	DO NOT
<ul style="list-style-type: none"> <li>✓ Workers may not be exposed to a concentration of a harmful substance that exceeds its Occupational Exposure Limit.</li> <li>✓ The measures to control the hazard shall include the provision and use of,               <ul style="list-style-type: none"> <li>○ Engineering controls</li> <li>○ Work practices</li> <li>○ Hygiene facilities and practices</li> <li>○ Personal protective equipment.</li> </ul> </li> <li>✓ Workers shall be trained in               <ul style="list-style-type: none"> <li>○ The specific procedures to be followed in the handling, use, and storage of the agent</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>✗ Do not forget to label containers containing chemical substances. It is essential to ensure safe handling of chemicals. Poor labeling, mislabeling, or no labeling at all could lead to accident, injury, unintended mixing of chemicals, or inappropriate handling.</li> <li>✗ Do not overfill containers. The general rule of thumb is that containers meant for chemical substances (manufactured, waste, or otherwise) should never be more than 90-95% full, depending on the contents.</li> <li>✗ Do not assume that "smelling" the toxic material will indicate when to change a respirator cartridge.</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



# Chemical and Biological Hazards

<ul style="list-style-type: none"> <li>○ In the proper use and care of required personal protective equipment</li> <li>○ In the proper use of emergency measures and procedure</li> </ul> <p>✓ Always consult the SDS for any specific storage, PPE, disposal emergency recommendations from the manufacturer/supplier.</p> <ul style="list-style-type: none"> <li>○ A worker exposed to the hazard of injury from contact of the worker’s skin with a noxious liquid shall be protected by wearing apparel sufficient to protect the worker from injury</li> <li>○ Where a worker is exposed to a potential hazard of injury to the eye due to contact with a biological or chemical substance, an eyewash fountain shall be provided.</li> <li>○ Where a worker is exposed to a potential hazard of injury to the skin due to contact with a substance, a quick-acting deluge shower shall be provided.</li> </ul>	
--	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

- O. Reg. 213/91: CONSTRUCTION PROJECTS
- R.R.O. 1990, Reg. 851: INDUSTRIAL ESTABLISHMENTS
- PDI Standard S.01 Personal Protective Equipment
- PDI Standard S.12 WHMIS
- Refer to PDI SWP available for specific hazards i.e. Mould, Asbestos, Lead, Bugs & Insects etc.

This Safe Work Practice must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	January 31 2020	November 15 <sup>th</sup> 2022	1



Safe Work Procedure

# PCB Removal

Safe Work Procedure Number

SWP-021

Potential Hazards Present (From Risk Assessment)	Required Safety Devices:	
<ul style="list-style-type: none"> <li>Exposure to PCB's</li> <li>Spills</li> <li>Cuts from lighting fixtures</li> <li>Electrical hazards</li> </ul>	 <b>Disposable coveralls</b>	 <b>Hard Hat*</b>
	 <b>Hand Protection</b>	 <b>Respirator</b>
	 <b>Safety Eyewear</b>	 <b>Safety Boots</b>
	 <b>Face Shield</b>	

## Required Materials & Equipment

This procedure applies to all staff removing ballasts/ transformers/ capacitors containing PCB's or any PCB spill.

Posting of this procedure, appropriate signage and information posters.

## Procedure

<b>Before You Start</b>	<ul style="list-style-type: none"> <li>Assess the risks to your health from PCBs and identify the measures which are needed to protect your health.</li> <li>Have proper screening protocols in place to ensure that all material is properly identified.</li> <li>Some equipment is labelled as containing PCBs but if you come across old equipment with no identifying label you should check with your employer, manufacturer, or owner of the equipment.</li> <li>All ballasts / transformers containing PCB's must be placed into appropriate containment receptacle.</li> <li>All PCB-containing equipment needs to be checked regularly for signs of PCB leakage.</li> </ul>
-------------------------	--

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	September 14 2023	September 14 <sup>th</sup> 2023	1

	<ul style="list-style-type: none"> <li>Consider the safety of all persons first.</li> </ul>
<b>During Your Work</b>	<ul style="list-style-type: none"> <li>Containment receptacles are to contain a small amount of absorbable material to absorb any leaking PCB material and shall be labeled with workplace label indicating PCB hazardous waste.</li> <li>Use the appropriate personal protective equipment as PCBs can enter the body by direct contact with skin, by breathing fumes or sprays</li> <li>Do not disturb PCB or materials containing PCBs unless you are trained, and all applicable safe work procedures have been followed.</li> <li>Do not eat, drink, smoke or chew gum in the workplace and wash thoroughly before eating, drinking, smoking, or using toilet facilities.</li> <li>Do not use a respirator, including disposable respirators, without being trained on the proper fit and use.</li> <li>Be aware of other personnel and processes in your work area</li> <li>Try to work in well-ventilated areas</li> <li>Keep containers sealed that are not for immediate use</li> <li>Maintain good housekeeping practices in the work area</li> </ul>
<b>After You Finish</b>	<ul style="list-style-type: none"> <li>All PCB material must be sent to an approved environmental disposal facility &amp; All associated paperwork for PCB material disposal must be returned &amp; records kept/maintained</li> <li>Place waste in a disposal bin that has appropriate labelling as per O.Reg.347 General – Waste Management.</li> <li>Wear disposable gloves, wash your hands and any exposed areas after use or when you have finished the job.</li> <li>If your protective clothing becomes contaminated with PCBs, do not take it home to wash it, or send it to a laundry.</li> <li>Follow procedure for cleaning any contaminated clothing.</li> <li>Clean your work area</li> <li>Ensure all containers are sealed and labels can be read</li> <li>Let a supervisor know about any personal protective equipment that needs replacement or maintenance.</li> <li>All reporting shall be in accordance with the job specific environmental plan.</li> <li>PDI personnel involved with project shall maintain the PCB disposal records.</li> </ul>

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	September 14 2023	September 14 <sup>th</sup> 2023	1

--	--

**Guidance Documents/ Standards/ Applicable Legislation/ Other:**

1990, Reg. 362: WASTE MANAGEMENT - PCB'S  
 Canadian Environmental Protection Act (Canada)  
 Federal PCB Regulations SOR2008/273  
 Provincial PCB Storage Regulation: MR474-88  
 Transportation of Dangerous Goods Act, 1992 (Canada)  
 Guidelines for the Management of Wastes Containing PCB's, Sep. 1989  
 PDI Chemical & Hazardous Materials – Handling and Storage Procedure

This Safe Work Procedure must be reviewed any time the task, equipment, or materials change, and at minimum every three years.

JH&SC Review:	Approved By:	Date Created:	Date of Last Review:	Rev. No.
Original Signed	Chris Letkeman	September 14 2023	September 14 <sup>th</sup> 2023	1



# Section 4: Supporting Documents

Disclaimer: The master of this document is controlled electronically. Printed copies of this document are not controlled. Document users are responsible for ensuring copies are valid prior to use.

*Version 2.0  
Last Revised: November 22 2022  
Revised by: HSE Department*

The following standards are found in this section:

#### 4.1. Activities

- Applicable legislation List
- FLHA Form
- Company Overall Risk Assessment
- Critical Task List
- Employee Safety Training Matrix
- JHA Template
- JHA Review
- KISSFLOW Incident Report Form
- KISSFLOW Quick Reference Guide SWP-A25, Pressurized water

# Applicable Safety Legislation

Health, Safety & Environmental | Man001



## Materials Resources retrieved from the following:

- Federal legislation can be retrieved from <http://laws.justice.gc.ca/eng/>.
- Ontario legislation is available at <http://www.e-laws.gov.on.ca>.
- Municipal By-Laws are available at (examples):
  - <http://www.brampton.ca/EN/residents/By-Law-Enforcement/Pages/Welcome.aspx>.
  - <https://www.hamilton.ca/government-information/by-laws-and-enforcement/city-hamilton-by-laws>

All employees contain access to electronic copies of relevant legislation via Microsoft Teams Group, under “Safety > Document > General.” – [Safety - Applicable Legislations](#)

### Occupational Health and Safety Act, R.S.O. 1990, c. O.1

<https://www.ontario.ca/laws/statute/90o01/v7>

### O. Reg. 381/15: Noise

<https://www.ontario.ca/laws/regulation/150381>

### O. Reg. 297/13: Occupational Health and Safety Awareness and Training

<https://www.ontario.ca/laws/regulation/130297>

### O. Reg. 490/09: Designated Substances

<https://www.ontario.ca/laws/regulation/090490>

### O. Reg. 278/05: Designated Substance – Asbestos on Construction Projects and in Buildings and Repair Operations

<https://www.ontario.ca/laws/regulation/050278>

### O. Reg. 632/15: Confined Spaces

<https://www.ontario.ca/laws/regulation/050632>

# Applicable Safety Legislation

Health, Safety & Environmental | Man001



---

## **O. Reg. 213/91: Construction Projects**

<https://www.ontario.ca/laws/regulation/910213>

## **R.R.O. 1990, Reg. 860: Workplace Hazardous Materials Information System (WHMIS)**

<https://www.ontario.ca/laws/regulation/900860>

## **Accessibility for Ontarians with Disabilities Act, 2005, S.O. 2005, c. 11**

<https://www.ontario.ca/laws/statute/05a11>

## **Employment Standards Act, 2000, S.O. 2000, c. 41**

[https://www.ontario.ca/laws/statute/00e41?\\_ga=2.45538468.1036399860.1499883731-1828853667.1496086667](https://www.ontario.ca/laws/statute/00e41?_ga=2.45538468.1036399860.1499883731-1828853667.1496086667)

## **Environmental Protection Act, R.S.O. 1990, c. E. 19**

<https://www.ontario.ca/laws/statute/90e19>

## **O. Ref. 1/17: Registrations Under Part II.2 of the Act – Activities Requiring Assessment of Air Emissions**

<https://www.ontario.ca/laws/regulation/170001>

## **O. Ref. 463/10: Ozone Depleting Substances and Other Halocarbons**

<https://www.ontario.ca/laws/regulation/100463>

## **O. Ref. 102/94: Waste Audits and Waste Reduction Work Plans**

<https://www.ontario.ca/laws/regulation/940102>

# Applicable Safety Legislation

Health, Safety & Environmental | Man001



**R.R.O. 1990, Reg. 362: Waste Management – PCB’s**

<https://www.ontario.ca/laws/regulation/900362>

**Highway Traffic Act, R.S.O 1990, c. H.8**

<https://www.ontario.ca/laws/statute/90h08>

**O. Reg. 199/07: Commercial Motor Vehicle Inspections**

<https://www.ontario.ca/laws/regulation/070199>

**Construction Lien Act, R.S.O. 1990, c. C.30**

<https://www.ontario.ca/laws/statute/90c30>

**Nuclear Substances and Radiation Devices Regulations (SOR/2000-207)**

<http://laws-lois.justice.gc.ca/eng/regulations/SOR-2000-207/>

**R.R.O. 1990, Reg. 834: Critical Injury – Defined**

<https://www.ontario.ca/laws/regulation/900834>

**O. Reg. 675/98: Classification and Exemption Of Spills And Reporting Of Discharges**

<https://www.ontario.ca/laws/regulation/940102>

**O. Reg. 224/07: Spill Prevention and Contingency Plans**

<https://www.ontario.ca/laws/regulation/070224>

# Applicable Safety Legislation

Health, Safety & Environmental | Man001



**Workplace Safety and Insurance Act, 1997, S.O. 1997, c. 16, Sched. A**

<https://www.ontario.ca/laws/statute/97w16>

**R.R.O. 1990, Reg. 1101: First Aid Requirements**

<https://www.ontario.ca/laws/regulation/901101>


**Fire Protection and Prevention Act, 1997, S.O. 1997, c. 4**

<https://www.ontario.ca/laws/statute/97f04>

**O. Reg. 213/07: Fire Code**

<https://www.ontario.ca/laws/regulation/070213>



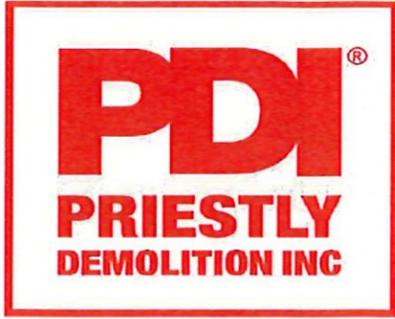

# Hazard Identification and Risk Management Tool

Person(s) completing: Chris Letkeman


Assessment date: November 10, 2025

Work area / department: All

JHSC review date: November 25, 2025

Management signature: [Signature]

Date: November 25, 2025

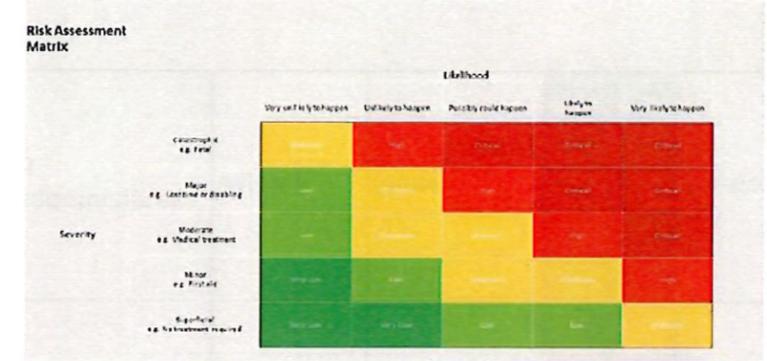

\*note: violence is a separate risk assessment

Recognize / Identify Hazards			Assess Risk with No Controls			Controls			Assess Risk With Controls			Action Item
Identify major activities by job title in your group	What hazard group can cause injury or illness	What specific hazards can cause injury or illness	How likely is the hazard to cause injury or illness	How serious can the harm be	Risk level	What are the legally mandated controls	What controls are currently in place	What, if any, additional controls are required	How likely is the hazard to cause injury or illness	How serious can the harm be	Risk Level	Practice or Procedure Required
Office	Ergonomic	Repetitive strain Awkward positioning	Possible	Moderate	Moderate		Awareness	Ergonomic assessments on demand	Unlikely	Moderate	Moderate	Practice
	Safety	Fire / explosion	Unlikely	Major	Moderate	Ontario Fire Code	Fire Wardens Emergency Response plan Fire Extinguishers Sprinkler system		Very unlikely	Moderate	Low	
	Safety	Vehicle traffic	Possible	Moderate	Moderate	Qualified operators / drivers	Designated walkways Speed limits posted		Very unlikely	Moderate	Low	Practice
	Safety	Environmental conditions i.e. CO, humidity, temp	Possible	Minor	Moderate		Maintained HVAC system	Monitoring as required Guidelines include: ACGIH TLV's, CSA Z412-17 Office Ergonomics, ASHRAE Standard 55-2013	Unlikely	Minor	Low	Practice
	Safety	Lighting	Unlikely	Minor	Low		Ongoing maintenance Blinds as required	Monitoring as required	Very unlikely	Minor	Very Low	Practice

	Safety	Slip / trips	Possible	Moderate	Moderate		Housekeeping Snow clearing	salting as required	Unlikely	Moderate	Moderate	Practice
Driving	Safety	3rd party collision / pedestrians	Likely	Catastrophic	Critical	Highway Traffic Act Motor Vehicle Safety Act	Valid drivers licence Insurance Mechanically sound vehicle GeoTracking	Drive according to lighting and weather conditions Obey Speed limits Means of communication	Unlikely	Major	Moderate	Practice
	Psychosocial	Road rage / confrontation	Unlikely	Major	Moderate		Allow plenty of time to reach your journey	Means of communication	Very unlikely	Major	Low	
	Safety	Single vehicle collision	Possible	Major	Moderate	Highway Traffic Act Motor Vehicle Safety Act	Valid drivers licence Insurance Mechanically sound vehicle Geo Tracking	Drive according to lighting and weather conditions Obey speed limits Means of communication	Unlikely	Major	Moderate	
Warehouse activities	Safety	Slip / trips	Possible	Moderate	Moderate		Housekeeping Snow Clearing Grading	spill clean up as required	Unlikely	Moderate	Moderate	Practice
	Safety	Materials that are stored at height	Possible	Moderate	Moderate	Rated racking system	No overloading Trained forklift personnel	load limit signage	Unlikely	Moderate	Moderate	Practice
	Chemical	Chemical storage	Possible	Moderate	Moderate	Chemical inventory	WHMIS training SDS available Labels	specialised storage as required	Unlikely	Minor	Low	Practice

	Chemical	Carbon Monoxide	Possible	Major	Moderate		Ventilation	Controls on riding vehicles	Unlikely	Moderate	Moderate	Practice
	Safety	Forklift operation	Possible	Moderate	Moderate	Trained operator Preventative maintenance program	Delineated walkways	Stand Protection for racking	Very unlikely	Moderate	Low	Practice
Interior demolition activities	Physical	Release of energy: Electrical, pneumatic, hydraulic or mechanical energy	Possible	Major	Moderate	Isolation of energy	Air gap procedure LOTO (if air gap not possible)	Onsite planning to include the need for the identification of all energy sources - for application of air gap JHA CARs	Very unlikely	Moderate	Low	Practice
	Safety	Vibration	Possible	Moderate	Moderate		Correct tool selection	Work rotation	Very unlikely	Moderate	Low	Practice
	Chemical	Chemical spill	Possible	Major	Moderate	Designated Substances Report	Clean up kits Trained personnel Site specific JHA		Unlikely	Moderate	Moderate	Practice

	Physical	Falling objects / Flying debris	Likely	Moderate	Moderate	Tether tools Toe plate	Delineation/barricade of the area Signage Spotter(s) Communication Drop zones	Housekeeping	Unlikely	Moderate	Moderate	Practice
	Physical	Dust / airborne hazards	Very likely	Major	Critical	Appropriate respiratory protection	Delineation/barricade of the area Signage Spotter(s) Communication	Client / third party stakeholder requirements	Possible	Minor	Moderate	Practice
	Physical	Noise exposure	Very likely	Major	Critical	Appropriate Hearing protection	Restricted access Tool selection Administrative controls	Double hearing protection in high noise areas	Possible	Moderate	Moderate	Practice
	Safety	Elevated work platforms / scaffolds	Possible	Major	Moderate	Rated scaffold equipment Training installers Trained users	Tagging system	Any client requirements	Unlikely	Moderate	Moderate	Practice

	Safety	Working at heights	Likely	Catastrophic	Critical	Working at Heights training	Appropriate PPE i.e. Harness, lanyard etc.	Proper maintenance / inspections of PPE	Unlikely	Minor	Low	Practice
	Safety	Interaction with machines / mobile equipment	Likely	Catastrophic	Critical	Equipment maintenance within OE specs Equipment inspections High visibility PPE Back up alarms	Trained / competent personnel	Personnel to maintain eye contact with operators when working in swing radius or path of travel	Unlikely	Moderate	Moderate	Practice
	Safety	Slip / trips	Possible	Moderate	Moderate		Housekeeping Spill clean up Snow removal	Sanding / salting as required	Unlikely	Moderate	Moderate	Practice
	Safety	injury / stresses from working with manual tools	Likely	Moderate	Moderate		CRA JHA		Possible	Moderate	Moderate	

	Ergonomic	Lifting of heavy or awkward objects	Likely	Moderate	Moderate		Trained / competent personnel	Availability of mechanical devices	Possible	Moderate	Moderate	Practice
Torching / cutting	Physical	Fire / explosion Propane Welding gases	Likely	Catastrophic	Critical	Flashback arrestors Approved storage cylinders	Hot Work Permits Fire watch Fire extinguishers Fire blankets	Client site requirements i.e. fire detection systems turned off	Unlikely	Major	Moderate	Practice
Hazardous material removal	Health	Lead	Possible	Moderate	Moderate	Designated Substances Report Reg. 833: CONTROL OF EXPOSURE TO BIOLOGICAL OR CHEMICAL AGENTS	Trained / competent personnel WHMIS		Unlikely	Moderate	Moderate	Procedure
	Health	Asbestos	Likely	Catastrophic	Critical	Trained personnel Designated Substance Report Ontario Regulation 278/05 (Designated Substance — Asbestos on Construction Projects and in Buildings and Repair Operations)	JHA CARs WHMIS	Asbestos awareness	Unlikely	Moderate	Moderate	Procedure
	Health	Biological agents i.e. animal, insects, biological wastes	Possible	Moderate	Moderate	Trained personnel Designated Substance Report	JHA CARs		Unlikely	Moderate	Moderate	Practice
	Health	Silica	Possible	Moderate	Moderate	Trained personnel Designated Substance Report R.R.O. 1990, Reg. 833:	JHA CARs WHMIS	Dust control	Unlikely	Moderate	Moderate	Practice
	Health	Chemical exposure	Possible	Moderate	Moderate	Trained personnel Designated Substance Report R.R.O. 1990, Reg. 833: CONTROL OF EXPOSURE TO BIOLOGICAL OR CHEMICAL AGENTS	JHA CARs WHMIS Respiratory protection	PPE as required	Unlikely	Moderate	Moderate	Practice


Transport of heavy equipment	Safety	Contact / crush hazard	Possible	Major	Moderate	Qualified operators	Equipment inspections Trained / competent personnel Preventative maintenance	PPE as required	Unlikely	Moderate	Moderate	Practice
Loading and unloading heavy equipment	Safety	Contact / crush hazard	Possible	Major	Moderate	Qualified operators	Equipment inspections Trained / competent personnel Preventative maintenance	PPE as required	Unlikely	Moderate	Moderate	Practice
Rigging and hoisting	Safety	Failure of lift	Likely	Catastrophic	Critical	Qualified riggers	Equipment inspections Trained / competent personnel Preventative maintenance	PPE as required Restrictions for personnel under loads	Unlikely	Catastrophic	Moderate	Practice
Confined space entry	Safety	Asphyxiation, entrapment from a free flowing solid or liquid	Likely	Catastrophic	Critical	O. Reg. 632/05: CONFINED SPACES	Permit system rescue equipment / personnel Monitoring LOTO	Identification of any confined spaces (normally be clients / owners)	Unlikely	Catastrophic	Moderate	Procedure
Excavating / trenching	Safety	Trench collapse	Possible	Major	Moderate	O. Reg. 213/91: CONSTRUCTION PROJECTS, Part III		Client requirements as required	Unlikely	Major	Moderate	Practice
Equipment operation	Safety	Unintended collapse of structure during sheering activities	Likely	Catastrophic	Critical	Engineered demolition plan	CARs JHA Qualified operators		Unlikely	Catastrophic	Moderate	Practice
	Safety	Contact with energized utilities	Likely	Catastrophic	Critical		CARs JHA Limits of approach Qualified operators	Signage where appropriate	Unlikely	Major	Moderate	Practice
	Safety	Struck by material while Piling and sorting material	Possible	Major	Moderate		Delineation of work areas Trained and competent operators		Unlikely	Major	Moderate	Practice
	Safety	Struck by material while storing of material	Possible	Major	Moderate		Delineation of work areas	Proper securement / tarping of materials	Unlikely	Major	Moderate	Practice
Fueling equipment	Safety	Fire / explosion	Possible	Major	Moderate		Bonding of equipment Trained personnel Fire extinguishers		Unlikely	Minor	Low	Practice

Outdoor activities	Physical	Hot / Cold Stress	Possible	Moderate	Moderate	ACGIH TLV	Proper attire for the conditions Work rest periods	Monitoring of weather conditions	Unlikely	Minor	Low	Practice
	Physical	Ultra Violet / Sun	Likely	Moderate	Moderate		Shirts with sleeves Hard Hats	availability of sunscreen Awareness	Unlikely	Moderate	Low	Practice
	Safety	lightning	Unlikely	Catastrophic	Moderate		30/30 rule	Monitoring of weather conditions Identify adequate shelter	Very unlikely	Catastrophic	Moderate	Practice
Yard Activities	Safety	Vehicular traffic	Possible	Major	Moderate	licensed drivers	High visibility Vests Speed limits	Designated walking areas	Unlikely	Major	Moderate	Practice
	Safety	Manual material handling	Likely	Moderate	Moderate		Team Lifts Mechanical lifting devices Proper PPE		Unlikely	Moderate	Moderate	Practice
Crushing activities	Safety	Struck by Equipment during set up and tear down / unplanned movement	Likely	Catastrophic	Critical		Proper PPE Mechanical assistance Competent personnel	Owners manual	Unlikely	Catastrophic	Moderate	Practice
	Physical	Noise exposure	Likely	Moderate	Moderate		Ear plugs / muffs	Double hearing protection where required	Unlikely	Minor	Low	Practice
	Safety	Rotating equipment	Possible	Major	Moderate		Factory guards		Unlikely	Major	Moderate	Practice
	Health	Dusts	Likely	Moderate	Moderate	DSS Report	Respiratory protection Dust minimisation / wetting		Possible	Minor	Moderate	Practice
	Health	Vibration	Likely	Moderate	Moderate		Job Rotation Adequate breaks		Possible	Minor	Moderate	Practice
Chainsaws	Safety	Struck by / laceration by chain	Possible	Moderate	Moderate		PPE CARs Anti-kick back devices Proper training		Unlikely	Minor	Low	Practice
Wildlife	Safety	Physical Attack	Unlikely	Moderate	Moderate		CARs		Unlikely	Minor	Low	Practice
Working Alone	Safety	Emergency with no assistance readily available	Likely	Catastrophic	Critical		CARs Communication devices		Unlikely	Moderate	Moderate	Practice

## Risk Assessment Matrix



## Hierarchy of Controls

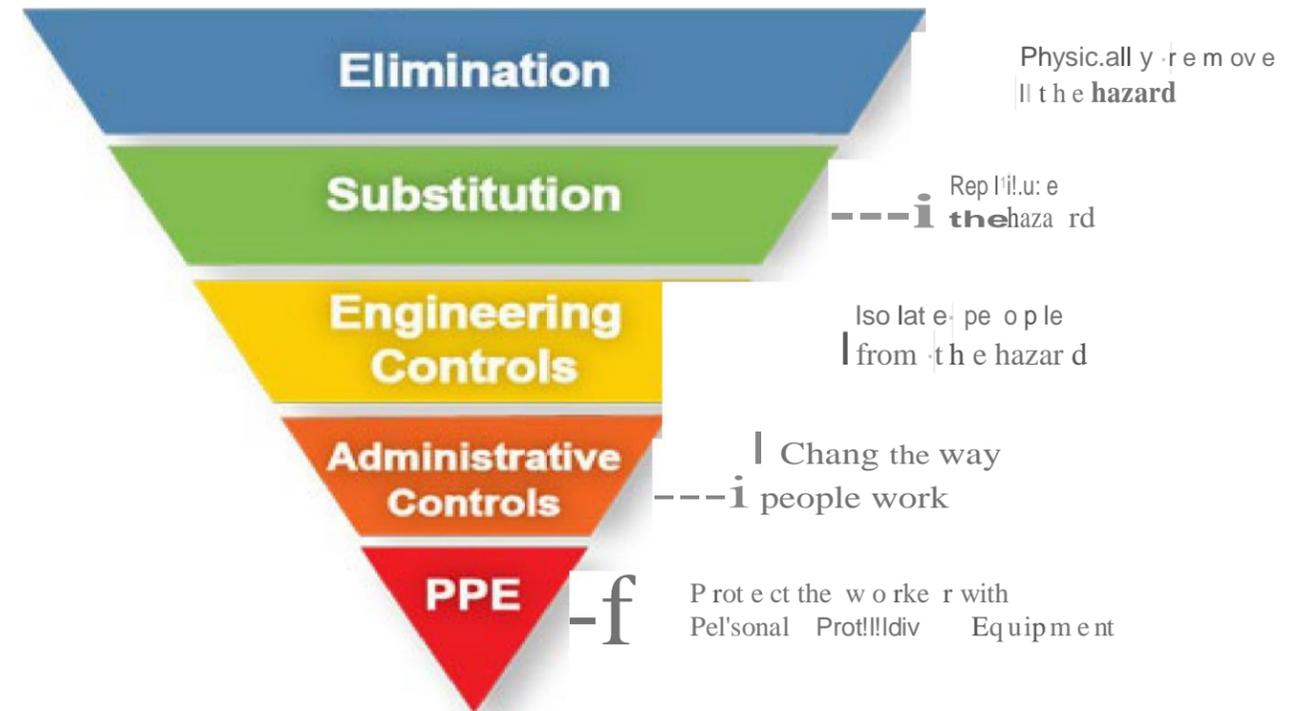

Most effective

least effective

# Critical Task List

Health, Safety & Environmental



<b>Activity</b>	<b>Critical risk</b>
<b>Interior Demolition</b>	<b>Noise</b>
	<b>Dust &amp; Airborne Contaminants</b>
	<b>Contact with Energised Utilities</b>
<b>Torching and Cutting</b>	<b>Fire &amp; Explosion</b>
<b>Working at Heights</b>	<b>Risk of Fall from Elevation</b>
<b>Rigging and Hoisting</b>	<b>Lift Failure</b>
<b>Confined Space</b>	<b>Entrapment &amp; Asphyxiation</b>
<b>Crushing Activities</b>	<b>Struck by Equipment</b>
<b>Heavy Equipment Operation</b>	<b>Unplanned Structural Collapse</b>
	<b>Interaction with Ground Personnel</b>
<b>Asbestos Material Removal</b>	<b>Asbestos Exposure</b>
<b>Heavy Equipment Assembly &amp; Disassembly</b>	<b>Unplanned Movement or Collapse</b>
<b>Working Alone</b>	<b>Emergency Assistance Not Immediately Available</b>
<b>Driving</b>	<b>Impact / Collision</b>

Date of Issuance	Date of Last Review	Rev.No.
01.01.2021	11.22.2022	2.0





# Job Hazard Analysis

Version: 3.0  
Last Revised: August 25 2023  
Revised by: HSE Department



<b>Person(s) Completing:</b> H&S DEPARTMENT		<b>Date created:</b> MM/DD/YYYY:
<b>Job #:</b>		<b>Project Address:</b>
<b>Work Area / Description of Work:</b>		
<b>Revision #</b>	<b>Revision Date</b> MM/DD/YYYY:	<b>Revision Details:</b>

<b>Approvals</b>
<b>Project Manager/ Superintendent:</b>
<b>Signature:</b>
<b>Signoff Date:</b> MM/DD/YYYY:




Recognise Hazards			Assess Risk with No Controls			Controls			Evaluate Risk With Controls		
Identify tasks in order	Hazard Group	Specific hazards	How likely is the hazard to cause injury or illness	How serious can the harm be	Risk level	What are the legally mandated controls	What controls are currently in place	What, if any, additional controls are required	How likely is the hazard to cause injury or illness	How serious can the harm be	Risk Level
Interaction with public and co-workers, including during access and aggress	Psychosocial	Violence & Harassment	Possible	Major	High	Occupational Health & Safety Act, Part III.0.1 Violence and Harassment	Priestly Demolition Harassment Policy Priestly Demolition Violence Policy PDI SWP A23 - Working in High Risk Areas PDI SWP - A32 Response to Regulatory Inspections & Orders	Site shall be secured with adequate barricades to prevent public pedestrian n, or unattended personnel from entering the demolition zone. Work zone is to be equipped with signage throughout indicating no entry allowed. Signage to indicated DEMOLITION ZONE- NO ENTRY - Inform the site supervision of the presence of an MOL inspector and respond politely & respectfully.	Unlikely	Minor	Low
COMPLETE PRE-USE INSPECTION OF ALL PPE, TOOLS & EQUIPMENT PRIOR TO USE.	Safety	Failure to complete a pre use inspection could result in overlooking potential defects in PPE,tools & equipment that could result in personal injury. Property damage & or environmental loss	Possible	Moderate	Moderate	REF - ON - REG - SEC#21-27- Protective Clothing, Equipment and Devices REF - ON- REG SEC# 93- 116 -Equipment, General.	Site orientation (Prime contractor) PDI H&S Manual -STANDARD- O13 - Orientation & Training	All workers are responsible for conducting daily pre-use inspection on their PPE, tools & and equipment . Workers to ensure compliance with safety policy. MANDATORY	Unlikely	Minor	Low



## Risk Assessment Matrix

		Likelihood				
		Very unlikely to happen	Unlikely to happen	Possibly could happen	Likely to happen	Very likely to happen
Severity	Catastrophic e.g. Fatal	Moderate	High	Critical	Critical	Critical
	Major e.g. Lost time or disabling	Low	Moderate	High	Critical	Critical
	Moderate e.g. Medical treatment	Low	Moderate	Moderate	High	Critical
	Minor e.g. Firstaid	Very Low	Low	Moderate	Moderate	High
	Superficial e.g. No treatment required	Very Low	Very Low	Low	Low	Moderate

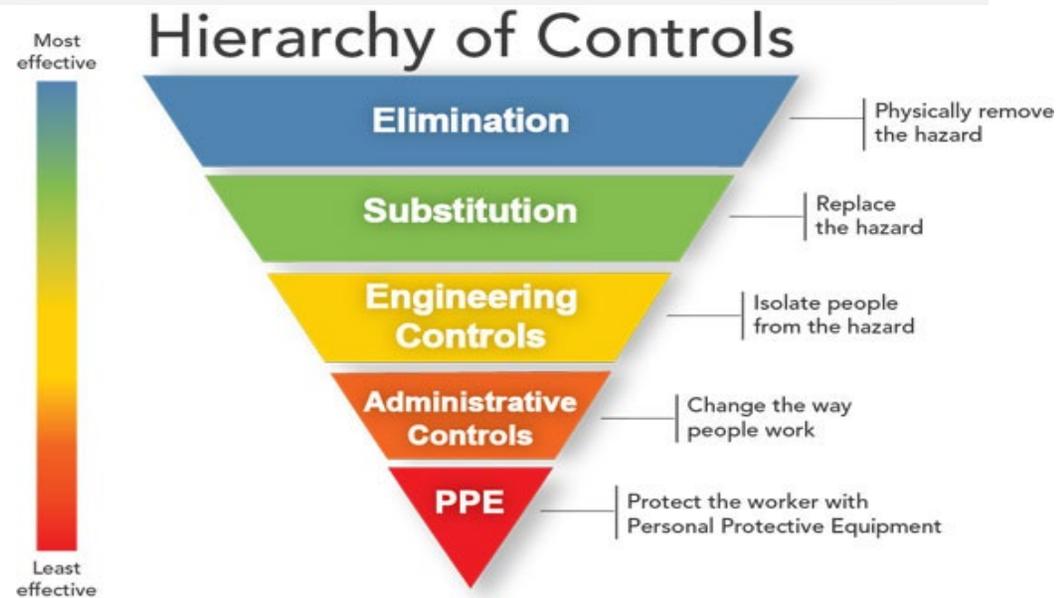

## Job Hazard Analysis Review



<b>Job #:</b>	<b>Date</b> MM/DD/YYYY:
<b>Work Task / Description of Work #:</b>	
<b>Competent Person Reviewing Material with Crew:</b>	
<b>Revision #</b>	<b>Revision Date</b> MM/DD/YYYY:



All workers will receive pre-job training on JHSAs that apply to their work and the principals of the Recognize-Assess-Control-Evaluate (R.A.C.E.) system of hazard identification and control. The foreman or supervisor is considered the competent person to conduct the review. The JHA applicable to the work being performed must be noted on the Field Level Hazard Assessment Form (FLHA) and reviewed with the crew at that time. A copy of the JHA must remain in the vicinity of the work being completed for ease of reference for workers completing the task.

#	Name	Title	Signature	Date
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				



# 2022-1 Incident Report, []

Current step: Start | Status: Draft | Progress: 0%

Printed on: 11/29/2022, 4:20 PM

## Initial On-Site Reporting

To be completed as soon as possible following incident

Report No.

2022-1

Date & Time of Incident \*

Company \*

Project Number: \*

Manager \*

Project Manager or Department Manager

Foreman/ Supervisor \*

Foreman, Superintendent or Direct Supervisor

Is there more than one foreman/ supervisor?

No

Was this incident involving a third party/ sub-trade?

No

Employee Involved \*

Witness(es)

Type of Incident \*

Potential Severity \*

Was there an injury?

No

What happened? Include information relating to who was in the area, task(s) being performed during the incident, nature of injury or damage, etc... \*

What immediate corrective action was taken at the scene? \*

Has the client or owner been notified?

No

Initial Pictures

No attachments

## Attachment

Attachment

No attachments

## Progress

0%

Start	Jasmine Ordonez	Draft
Major Severity Investigation Manager/Superintendent	Unassigned	Not started
Other Severity Investigation - Foreman/Manager	Unassigned	Not started
Safety Coordinator Review	Unassigned	Not started
Final Safety Review	Chris Letkeman	Not started
Final Executive Management Review	Brian Priestly	Not started
Completed	Jasmine Ordonez	Not started

## Comments


  
No comments



## KISSFLOW Reporting

### Finding the report:

1. In the top right corner, click on "REPORTS"
2. Click on "App-Specific Reports"

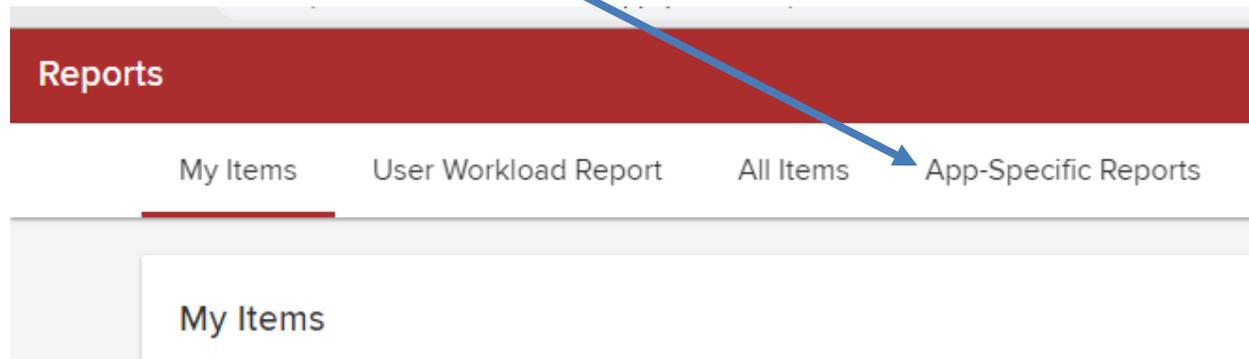

3. Choose the 'app' that you want to get the report from.
4. Once you select an app, there should be two types of options for reports. Select one of the reports:
  - a. "App Metrics": this gives metrics for how the report is used; how often; how long it takes to complete certain steps; etc...
  - b. All other reports: show as a grid that allows you to filter the data.

### Filtering Reports for Data:

#### To get weekly data and/ or filter by a certain date:

- Click on the funnel (  ) above the column with the dates
- Add in the following for:
  - Change the OR to the AND (AND should be red) 
  - Please select operator: Choose the option "greater than or equal to"
  - Enter your value here: A calendar should appear. Choose the earliest date that you want to filter the list by.
  - Click the [+ Add New rule](#) button
  - Please select operator: Choose the option "less than or equal to"
  - Enter your value here: A calendar should appear. Choose the latest date that you want to filter the list by. [You may have to scroll down to see this option]
  - Click the "Apply" button and your list will filter by these parameters.

### Other Filter Options:

- Click on the funnel (  ) above the column you want to filter
- Please select operator: Choose "Contains"
- Enter your value here: enter what you want to filter by that would be in that column

### Exporting Reports

- Click the  symbol once you are in the report you want to export.
- You will receive an e-mail with the exported data.
  - Note: It will only export the data that is in the contents of the columns and rows – not a PDF of the actual report

### Getting a Copy of the Completed Report

- Click the  symbol beside the completed form you want a copy of
- Click the  symbol in the right hand corner
- Follow the print instruction

